

life is
too short
for boring
lighting



WEVER & DUCRÉ
LIGHTING

“There’s no beauty without great lighting. Beauty is never loud. It hides in details, in shape, in moments, in light. Great lighting allows us to see what was always there and to transform it into something beautiful.”

ANTWERP-BASED PHOTOGRAPHER FREDERIK VERCRUYSSÉ

story




weverducre.com/coverstory26

telling






Indoor

CEILING RECESSED 54 – 173		 QITO trimless 57	 QITO 59	 MATCH POINT trimless 61	 MATCH POINT 61	 BLIEK PETIT trimless 63	 BLIEK PETIT 63	 BLIEK 67	 LINOO trimless 71
 LINOO 71	 PIRRO PETIT 75	 PIRRO 77	 PLANO PETIT 83	 PLANO 85	 STRANGE PETIT trimless 87	 STRANGE trimless 89	 SNEAK trimless 91	 SNEAK 93	
 DEEP POINT 97	 DEEP BIJOU 99	 DEEP PETIT IQ 101	 DEEP PETIT 103	 DEEP IQ 105	 DEEP 107	 DEEPER 109	 DEEP ADJUST PETIT IQ 111	 DEEP ADJUST PETIT trimless 113	
 DEEP ADJUST PETIT 113	 DEEP ADJUST IQ 115	 DEEP ADJUST trimless 117	 DEEP ADJUST 119	 RONY POINT 123	 RONY PETIT 125	 RONY ADJUST PETIT 127	 RONY ADJUST 129	 CENO 131	
 LECA 135	 MATCH 137	 MATCH SNEAK trimless 143	 MATCH SNEAK 143	 MATCH STICK trimless 145	 MATCH STICK 145	 RUVI 147	 PLANO IP44 151	 MATCH POINT IP44 153	
 DEEP POINT IP44 155	 DEEP BIJOU IP65 157	 DEEP PETIT IP65 159	 DEEP IP44 IP65 161	 DEEPER IP44 163	 TAIO IP65 165	 RINI SNEAK IP44 167	 PERLEZ IP44 169	 MIRBI 1.0 IP44 171	
 MIRBI 2.0 IP44 171	 CITY IP44 173	CEILING SURFACE 174 – 307		 QITO 177	 BLIEK PETIT 179	 CENO 181	 LECA 189	 MATCH 193	 MICK 199


Indoor

 PILLO 201	 SARA 203	 SQUBE 205	 LINOO 211	 PIRRO PETIT 213	 PIRRO 215	 PIRRO OPAL 221	 PIRRO ON BASE 223	 PLANO PETIT 227	
 SIRRO 229	 BOX MINI 231	 BOX 235	 DOCUS MINI 239	 DOCUS 241	 HEXO MINI 243	 HEXO 245	 RAY MINI 247	 RAY 251	
 SOLID BIJOU 253	 SOLID PETIT 255	 SOLID 257	 TRACE 261	 FINLIN 263	 FIL SPIN 267	 TRACE SPIN 269	 PERLEZ SPIN 271	 TRACE GRID 273	
 PERLEZ GRID 275	 VENN 277	 DRO 279	 MIRRO 283	 CLEA 287	 J.J.W. 289	 WIRO 291	 ROOMOR 293	 PERLEZ IP44 295	
 MIRBI 1.0 IP44 297	 MIRBI 2.0 IP44 297	 TAIO IP65 299	 ROB IP44 301	 ROBY IP44 303	 TOWNA IP44 305	 ROSS IP54 307	STREX 48V-TRACK 312 – 359		 TRACKS 313
 CENO 321	 LECA 325	 DOMY 327	 MATCH 329	 TRACE MINI 331	 MICK 333	 BOX 335	 DOCUS 337	 HEXO 339	
 RAY 341	 DOT MODULE 343	 OPAL MODULE 343	 COZY CONE 345	 MATCH 347	 TRACE 351	 ODREY 353	 OPLIA 357	 SOLLI 359	

Indoor

1-PHASE TRACK 360 – 383																		
	TRACKS 361		PILLO 363		SARA 365		SQUBE 369		PIRRO 371		DRO 373		HEXO MINI 375		HEXO 377			
3-PHASE TRACK 384 – 395																		
	TRACKS 385		LIKO 387		SQUBE 389		HEXO MINI 391		HEXO 393		RAY MINI 391		RAY 393		ROOMOR 395			
SYSTEM 396 – 411																		
	QUBBY 397		FLYRA 401		ELLO 405		ILANE 409											
CEILING SUSPENDED 412 – 565																		
	MATCH LUSTA 415		TRACE 417		NET 421		FINELLE 423		FLYRA 427		FINLIN 433		STUDO 437		FIL 441			
																		
	DARF 445		SHEDDA 449		KUJO 453		OPLIA 457		QUBBY 459		GIGANT 461		CONE 463		DRO 465		MIRRO 467	
																		
	J.J.W. 479		WIRO 489		ROOMOR 495		ROOMOR 499		COZY CONE 503		HEXO MINI 505 531		HEXO 533		RAY MINI 507 535		RAY 537	

Indoor

								
MATCH 509	TRACE 511 547	ODREY 517 539	OPLIA 521	SOLLI 523	WETRO 549	CLEA 557	SHIEK 561	DINOR 563
WALL RECESSED 566 – 581								
								
LECA SNOOZE 569	MATCH SNOOZE 571	RETO 573	LITO 1.0 575	LITO 2.0 575	STRIPE SLIM 577	STRIPE 579	ORIS 581	
WALL SURFACE 582 – 711								
								
CENO 585	MATCH 589	TRACE MINI 591	TRACE 593	TRACE SLIM 595	ODREY 599	BOX MINI 605	BOX 607	
								
DOCUS MINI 609	HEXO MINI 611	RAY MINI 613	RAY 615	CENTRAL 617	LEENS 619	BENTO 621	DRO 623	MIRRO 625
								
CLEA 631	J.J.W. 633	ROOMOR 639	DARF 643	CG SQUARE 647	DOT 649	TAPIS 651	MILES ROUND 663	MILES CARRÉ 667
								
MILES 669	LARRA 671	FINLIN 673	FINLIN ROUND 679	FIL SPIN 681	VENN 683	MATCH SNOOZE 685	MICK SNOOZE 687	SARA SNOOZE 689
								
MICK WALL 691	DOMINO 693	SCAVA 695	HAJO IP44 697	PERLEZ IP44 701	MIRBA IP44 705	MIRBI IP44 707	RIBELLE IP65 709	PAVIO IP65 711

Indoor

TABLE 712 – 725							
	DRO 715	DRO 717	CG01 719	MIRRO 721	MATCH 723	ROOMOR 725	
FLOOR 726 – 735							
	DRO 715	FINLIN 727	MATCH 729	DRO 731	MIRRO 733	ROOMOR 735	
SOFT ACOUSTICS							
	MIRRO SOFT 285	MIRRO SOFT 471	SPIRRA SOFT 475	WAVE SOFT 477	SOLLI COCOON 525	MIRRO SOFT 629	TAPIS SOFT 657

Outdoor

CEILING RECESSED 738 – 749							
	DEEP BIJOU 741	DEEP PETIT 743	DEEP 745	TAIO 747	INTRA 749		
							
	TRAM 753	TUBE 755	TAIO 757	RAY 759	TRAIN 761	TUBE CARRÉ 763	BOX 765
							
	BLAS 767						
CEILING SURFACE 750 – 775				CEILING SUSPENDED 776 – 777			
	ROB 769	ROSS 771	TRADORA 775		TRADORA 777		

Outdoor

WALL RECESSED 778 – 787							
	RETO 781	ORIS 785					
WALL SURFACE 788 – 835							
	CLASCO 791	KIOSK 793	TRAM 797	TUBE 799	TAIO 803	RAY 805	TRAIN 807
							
	TUBE CARRÉ 811	BOX 815	TAPE 817	PALOS 819	SWAM 821	TRADORA 823	RIBELLE 825
FLOOR RECESSED 836 – 853							
	X-BEAM ROUND 829	PAVIO 831	RETO ROUND 833	RETO 835			
							
	BLINK trimless 839	BLINK 839	CARD 843	MAP 845	MAP ASYM 849	CHART 851	CHART ASYM 853
FLOOR SURFACE 854 – 891							
	KIOSK 857	SWAM 859	STIPO 863	X-BEAM 865	RIBELLE 867	GATE ROUND 869	GATE CARRÉ 871
							
	PALOS CARRÉ 877	LINUS 881	GEO 885	REED 887	POLA 889		

WELCOME TO OUR WORLD

Wir alle kennen ihn: den Blick an die Decke und den Gedanken „Diese Leuchte hat wirklich jeder“. Deshalb schaffen wir Lichtlösungen, die einzigartig sind – inspiriert von Menschen wie Ihnen, die Design und Qualität lieben. Denn für langweilige Leuchten ist das Leben zu kurz.


Nous le connaissons tous : ce regard vers le plafond en pensant « Tout le monde a cette lampe ». C'est pourquoi nous créons des solutions d'éclairage uniques – inspirées par des personnes comme vous, qui apprécient le design et la qualité. La vie est trop courte pour des lampes ennuyeuses.



weverducre.com/about

Our world



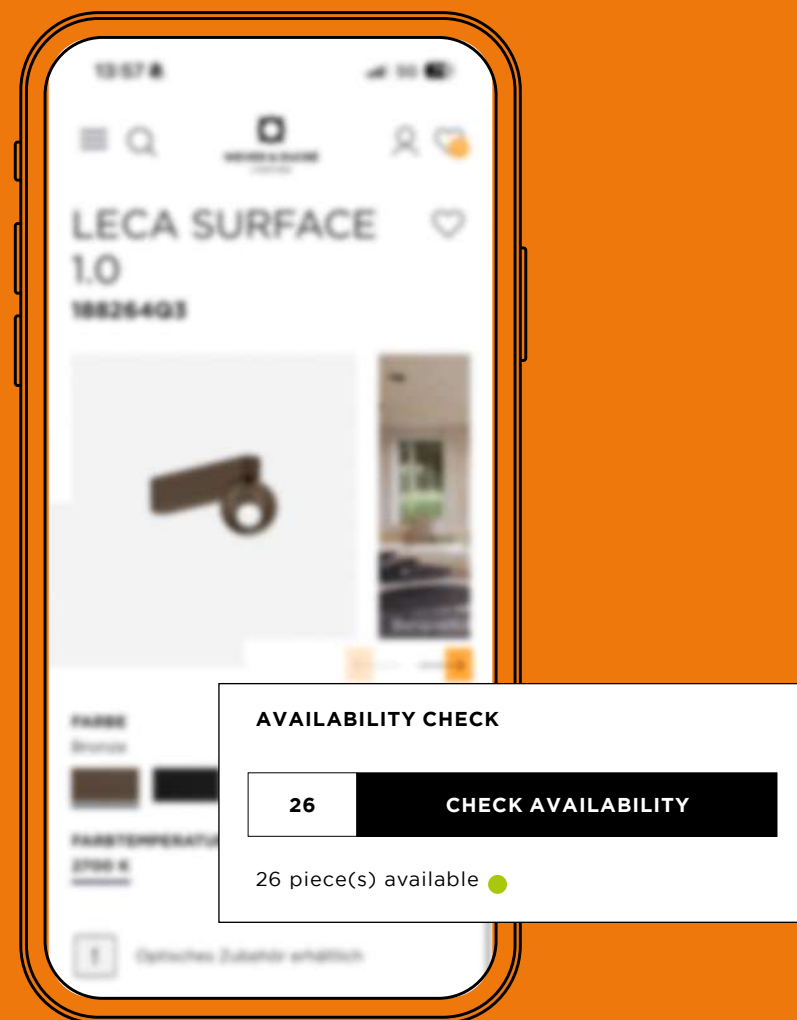

availability

READY FOR AN ONLINE DATE

So ist das mit unseren Leuchten: Einmal verliebt, will man sie sofort haben. Gute Nachricht: Wir versenden alle Produkte innerhalb von 48 Stunden! Prüfen Sie online die Verfügbarkeit Ihres Favoriten.

C'est comme ça avec nos luminaires : une fois que vous en êtes tombé amoureux, vous les voulez tout de suite. Bonne nouvelle : nous expédions tous les produits sous 48 heures ! Vérifiez la disponibilité de votre article préféré en ligne.



weverducre.com/products

with


FROM BELGIUM WITH LOVE

In Belgien liegt nicht nur der Duft von frischen Waffeln und Schokolade in der Luft – auch die Liebe zu gutem Design. Hier treffen kreative Köpfe auf eine lange Designtradition, verbinden Handwerkskunst mit moderner Ästhetik – und schaffen Licht, das Geschichten erzählt und Räume strahlen lässt.

En Belgique, ce n'est pas seulement le parfum des gaufres et du chocolat frais qui flotte dans l'air – c'est aussi l'amour du bon design. Ici, des esprits créatifs rencontrent une longue tradition du design, mêlant artisanat et esthétique moderne – pour une lumière qui fait rayonner les espaces.



weverducre.com/about

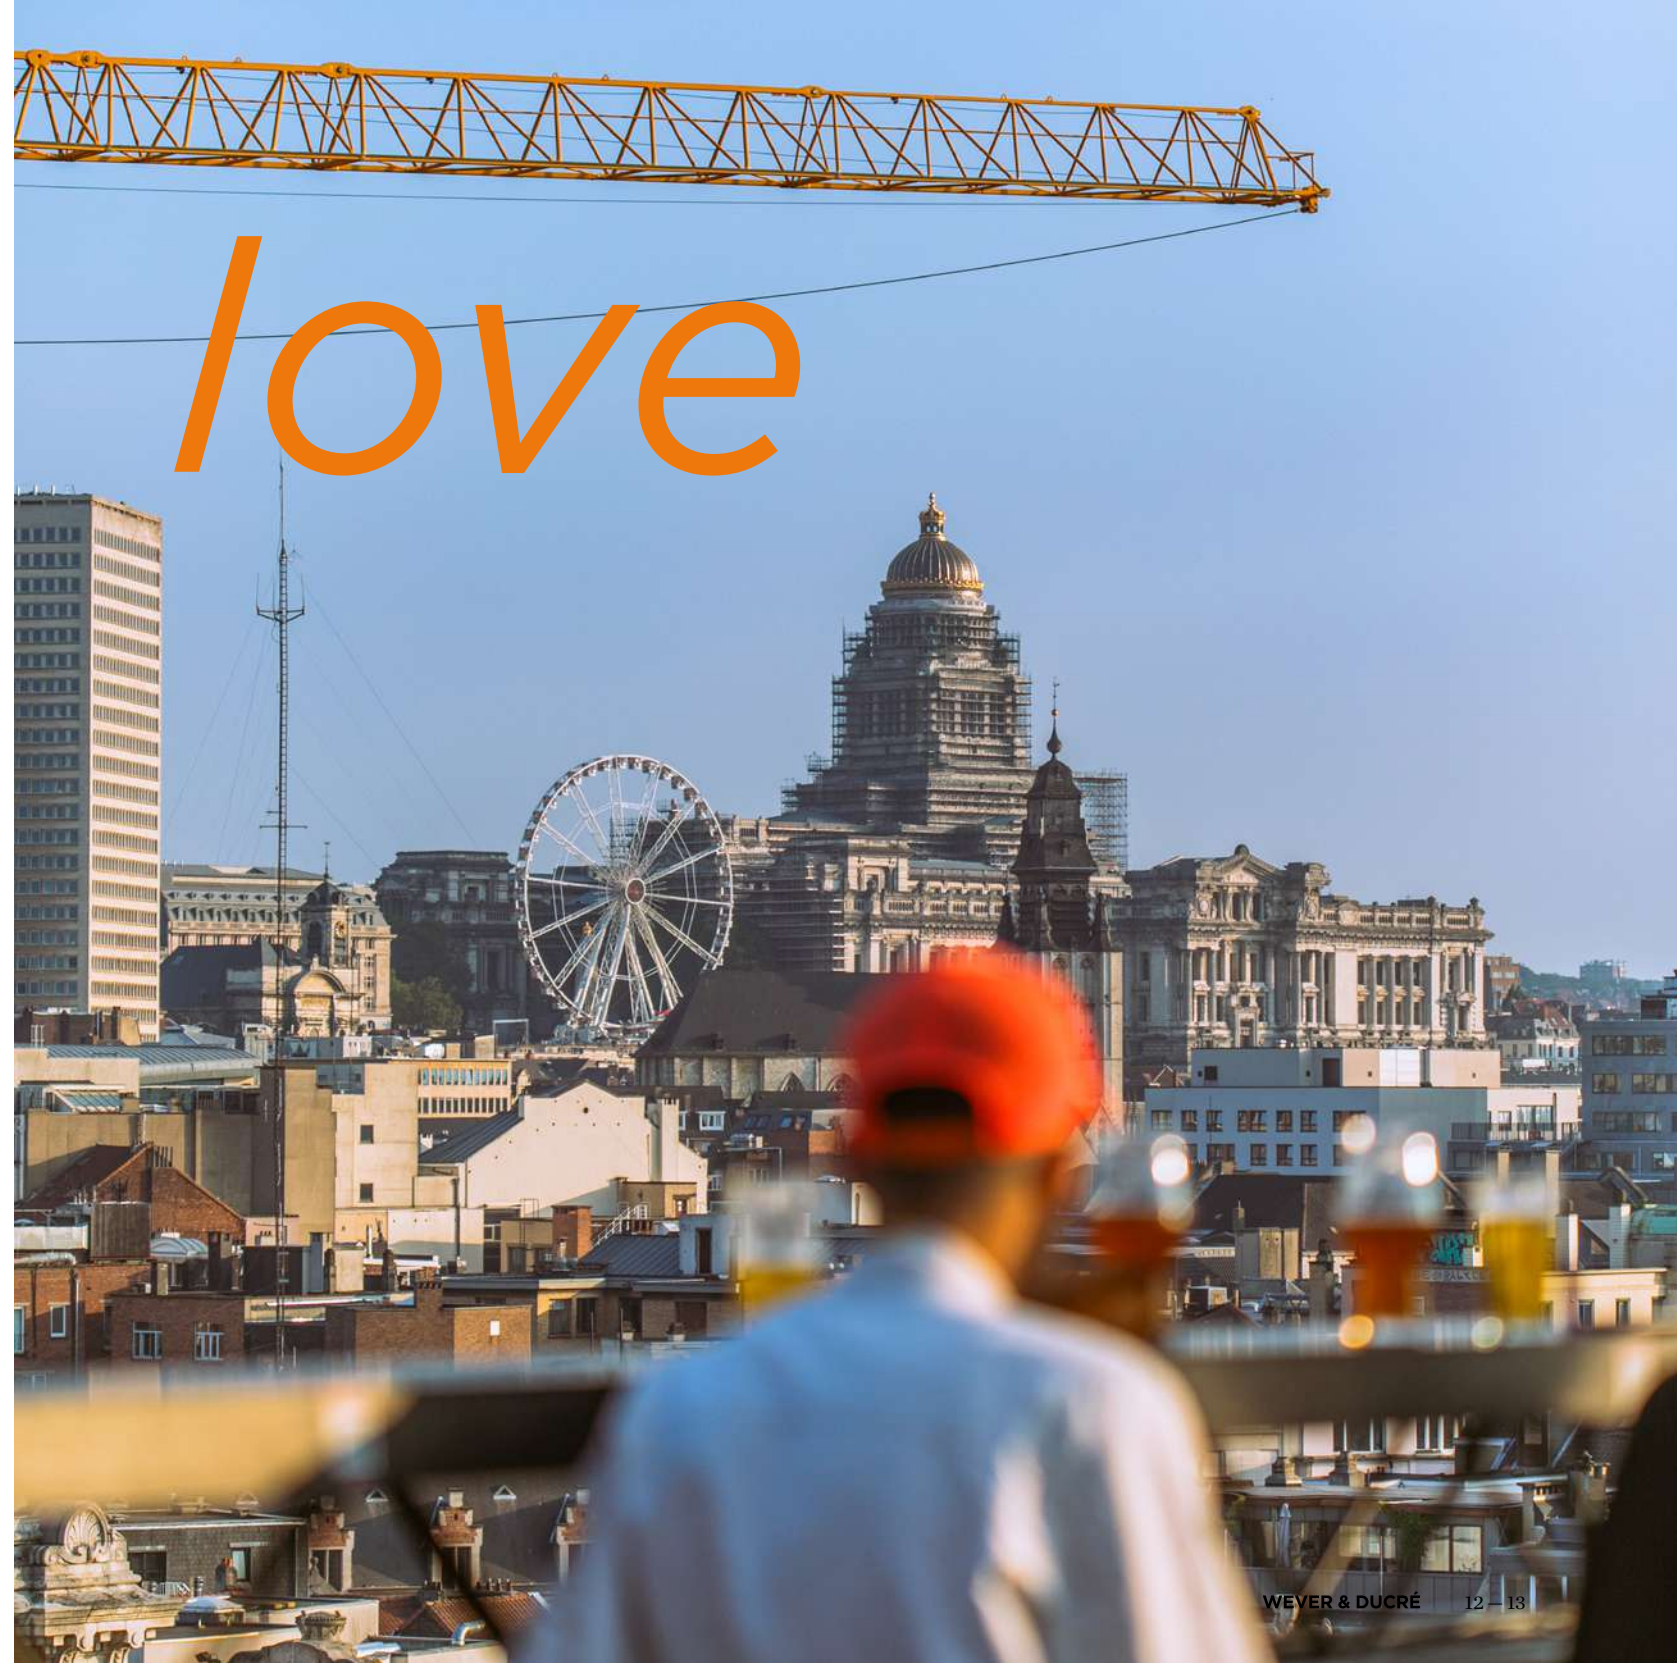

design



CHRISTOPHE GEVERS



JULES WABBES

that

OUR SIGNATURE PIECES

Seit über 40 Jahren gestaltet Wever & Ducré Licht als Ausdruck von Design. Verwurzelt im belgischen Erbe arbeitet die Marke mit Produkten von Christophe Gevers, Serge Cornelissen und Jules Wabbes sowie internationalen Designern wie 13&9 Design – für zeitlose Eleganz und inspirierende Lichtkunst.

Depuis plus de 40 ans, Wever & Ducré façonne la lumière comme une expression du design. Ancrée dans l'héritage belge, la marque collabore sur des produits de Christophe Gevers, Serge Cornelissen et Jules Wabbes, ainsi qu'avec des designers internationaux tels que 13&9 Design – pour créer une élégance intemporelle et un art lumineux inspirant.



weverducre.com/iconicproducts



S + R CORNELISSEN

lasts

CHRISTOPHE GEVERS



Christophe Gevers (1928–2007) war ein bedeutender belgischer Innenarchitekt und Designer, bekannt für seine charakteristischen Restaurantkonzepte. Seine Verbindung von Handwerkskunst und Ästhetik prägt sein Werk, das sein Schaffen einzigartig und vielseitig zugleich machte.

Christophe Gevers (1928–2007) était un important architecte d'intérieur et designer belge, connu pour ses concepts de restaurants distinctifs. Son alliance de savoir-faire et d'esthétique a marqué son œuvre, rendant ses créations à la fois uniques et polyvalentes.

gevers



weverducre.com/gevers





13&9 DESIGN

13&9 Design – das kreative Duo Anastasija und Martin Lesjak – steht seit 2013 für visionäres Design aus Österreich. Für Wever & Ducré entstanden Highlights wie MIRRO, DRO und SHEDDA fractal. Ihr Stil: fraktale Muster, modulare Akustik – Licht Systeme und skulpturale Formen, die das Wohlbefinden der Menschen und die atmosphärischen Räume im Mittelpunkt haben.

13&9 Design – le duo créatif formé par Anastasija et Martin Lesjak – incarne depuis 2013 un design visionnaire venu d'Autriche. Pour Wever & Ducré, ils ont créé des pièces phares comme MIRRO, DRO et SHEDDA fractal. Leur style : des motifs fractals, une acoustique modulaire – des systèmes d'éclairage et des formes sculpturales qui placent le bien-être des personnes et les espaces atmosphériques au centre.

13&9



design



weverducre.com/13and9design

jules



J.J.W.

Jules J. Wabbes ist seit Jahren ein Klassiker von Wever & Ducré. Die grazil gebogenen Linien zeugen von anspruchsvoller Ästhetik. Wir halten das für Tradition im besten Sinne und setzen die Produktlinie mit Decken- und Wandleuchten fort.

Jules J. Wabbes est depuis de nombreuses années un classique de Wever & Ducré. Les lignes gracieusement courbées témoignent d'une esthétique raffinée. Nous considérons cela comme une tradition dans le meilleur sens du terme et poursuivons la gamme de produits avec des plafonniers et des appliques murales.

wabbes



weverducre.com/jjw





serge &

S+R CORNELISSEN

Serge Cornelissen verfügte über mehr als 20 Jahre Erfahrung im Design von Lichtlösungen für Architektur. Mit seinem architektonischen Hintergrund vereinte er Ästhetik, Technologie und Funktion zu preisgekrönten Konzepten – etwa für Wever & Ducré mit MICK, VENN, HAJO und QUBBY.

Serge Cornelissen possédait plus de 20 ans d'expérience dans la conception de solutions d'éclairage pour l'architecture. Grâce à sa formation en architecture, il associait esthétique, technologie et fonctionnalité dans des concepts primés – notamment pour Wever & Ducré avec MICK, VENN, HAJO et QUBBY.



robert



weverducre.com/cornelissen

ALL AROUND THE WORLD

Wever & Ducré-Leuchten sind weltweit zuhause – von der London-Rooftop-Bar bis zum Berlin-City-Apartment. Ihr Erfolgsgeheimnis: außergewöhnliches Design und hochwertige Materialien. Und das Beste: Wir liefern alle Produkte plastikfrei. Wo kann man uns finden? Fast überall. Einfach online entdecken und direkt einen Termin im nächsten Showroom vereinbaren.

Les luminaires Wever & Ducré se sentent chez eux partout dans le monde – des rooftop bars de Londres aux appartements citadins de Berlin. Leur secret ? Un design exceptionnel et des matériaux de première qualité. En het beste van al is: nous livrons tous nos produits sans plastique. Où nous trouver ? Presque partout. Découvrez nos emplacements en ligne et réservez facilement votre prochaine visite en showroom.



KORTRIJK



PARIS



FRANKFURT

world



weverducre.com/locations

lifetime



SUSTAINABILITY BY FUNCTION

Unser Ziel: Leuchten, die auch nach Jahren noch strahlen. Dank Qualität nach Ökodesign-Richtlinie, langlebigen Ersatzteilen und LED-Engines mit 20-Jahre-Austauschbarkeit. LED-Modul tauschen? Mit werkzeugfreien Wechselmodulen ganz einfach. Plus: 5 Jahre Garantie* – fair, oder?

Notre objectif : des luminaires qui brillent même après des années. Grâce à la qualité conforme à la directive sur l'écoconception à des pièces de rechange durables et à des LED engines offrant 20 ans de remplaçabilité. Changer le module LED ? Rien de plus simple grâce aux unités sans outil. Et en plus, 5 ans de garantie* – équitable, non ?

*Die geltenden Garantiebedingungen sind auf weverducre.com einsehbar.

*Les conditions de garantie indiquées sur le site weverducre.com s'appliquent.



weverducre.com/sustainability

HOW SOFT CAN IT GET?

Unsere Welt ist laut – umso wichtiger sind Orte, die Ruhe ausstrahlen. Die Wever & Ducré-Soft-Kollektion bietet stimmungsvolles Licht kombiniert mit Design & Atmosphäre. Das Material? Filz aus recycelten PET-Flaschen. Klingt gut, oder?

Notre monde est bruyant – d'où l'importance de lieux qui dégagent du calme. La collection Soft de Wever & Ducré offre une lumière chaleureuse, alliée à un design plein d'atmosphère. Le matériau ? Du feutre fabriqué à partir de bouteilles PET recyclées. Ça sonne bien, non ?



weverducre.com/soft-acoustics



soft acoustics



layer by layer

Q 3D PRINTED
by IQ LUX

PRINTED IN 3D

Seit 2023 experimentieren wir gemeinsam mit IQ LUX an nachhaltigen Materialien, um Leuchten mit minimaler Umweltbelastung zu entwickeln. Jetzt wird diese Vision Teil unseres Produktportfolios – mit der neuen IQ-Serie der DEEP Family. Ressourcenschonend produzierte Leuchten ausgestattet mit hocheffizienten LED-Modulen.

Depuis 2023, nous expérimentons avec IQ LUX des matériaux durables afin de développer des luminaires à impact environnemental minimal. Cette vision fait désormais partie de notre portefeuille de produits avec la nouvelle série IQ de la famille DEEP. Un boîtier fabriqué de manière économe en ressources, équipé de modules LED à très haut rendement.



weverducre.com/iqlux

THE FUTURE SHINES BRIGHT


Unsere Leuchten bleiben im Kopf – nicht nur wegen ihres Designs, sondern auch dank smarter Technik. Neu dabei: unsere Auswahl an Leuchten mit integrierter Loxone-Tree-Technologie, die sich ganz einfach mit der Gebäudeautomatisierung von Loxone verbinden. So lassen sich kleine wie große Projekte ganz einfach umsetzen.

Nos luminaires marquent les esprits – non seulement par leur design, mais aussi grâce à une technologie intelligente. Nouveauté : une sélection de luminaires avec technologie Loxone Tree intégrée, facilement connectables à l'automatisation du bâtiment Loxone. Les petits comme les grands projets se réalisent ainsi en toute simplicité.



ALL LOXONE LUMINAIRES ONLINE
weverducre.com/loxone

loxone

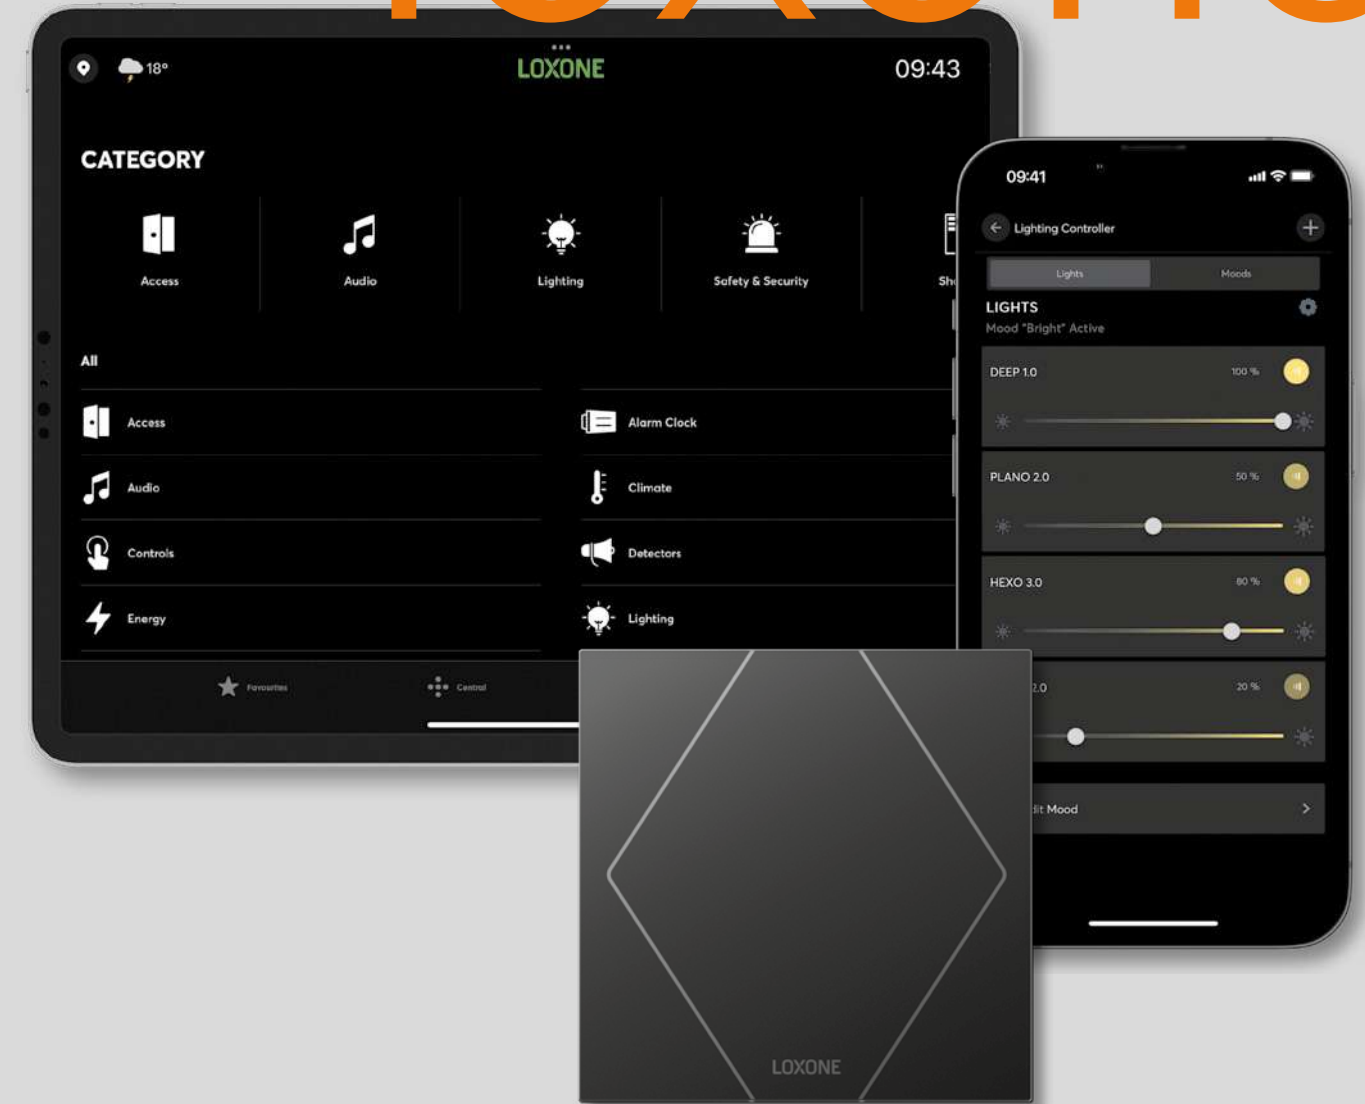

READY TO TUNE UP YOUR PROJECT?

Spannende Beleuchtungssysteme nicht erschwinglich? Nonsense! Mit Wever & Ducre wissen Sie es besser und zeigen allen, wie einfach es ist, mit dem richtigen Licht die perfekte Atmosphäre in Ihrem Herzensprojekt.

Des systèmes d'éclairage remarquables seraient-ils inabordables ? Absurde ! Avec Wever & Ducre, vous savez que c'est tout le contraire. Il devient simple de créer l'atmosphère parfaite grâce à la bonne lumière, pour un projet qui vous tient réellement à cœur.



weverducre.com/tune-up



LEEUWARDEN | THE NETHERLANDS



HASSELT | BELGIUM



COLOGNE | GERMANY

tune up



HERO OF THE YEAR 2025



weverducre.com/picture-gallery

light



guide


THE KEY TO A BRIGHTER HOME

Wie wir Licht wahrnehmen, beeinflusst, wie wir uns in einem Raum fühlen. Deshalb sollte die Beleuchtung immer zur Funktion passen – ob zum Arbeiten, Spielen oder Entspannen. Sie wissen schon, wofür? Perfekt! Dann starten Sie mit der Planung – oder entdecken Sie Basics in unserem Lightguide.

La façon dont nous percevons la lumière influence notre bien-être dans un espace. C'est pourquoi l'éclairage doit toujours s'adapter à sa fonction – que ce soit pour le travail, le jeu ou la détente. Vous savez déjà ce que vous voulez ? Parfait ! Lancez la planification ou découvrez les bases dans notre Lightguide.




weverducre.com/basic-lightguide

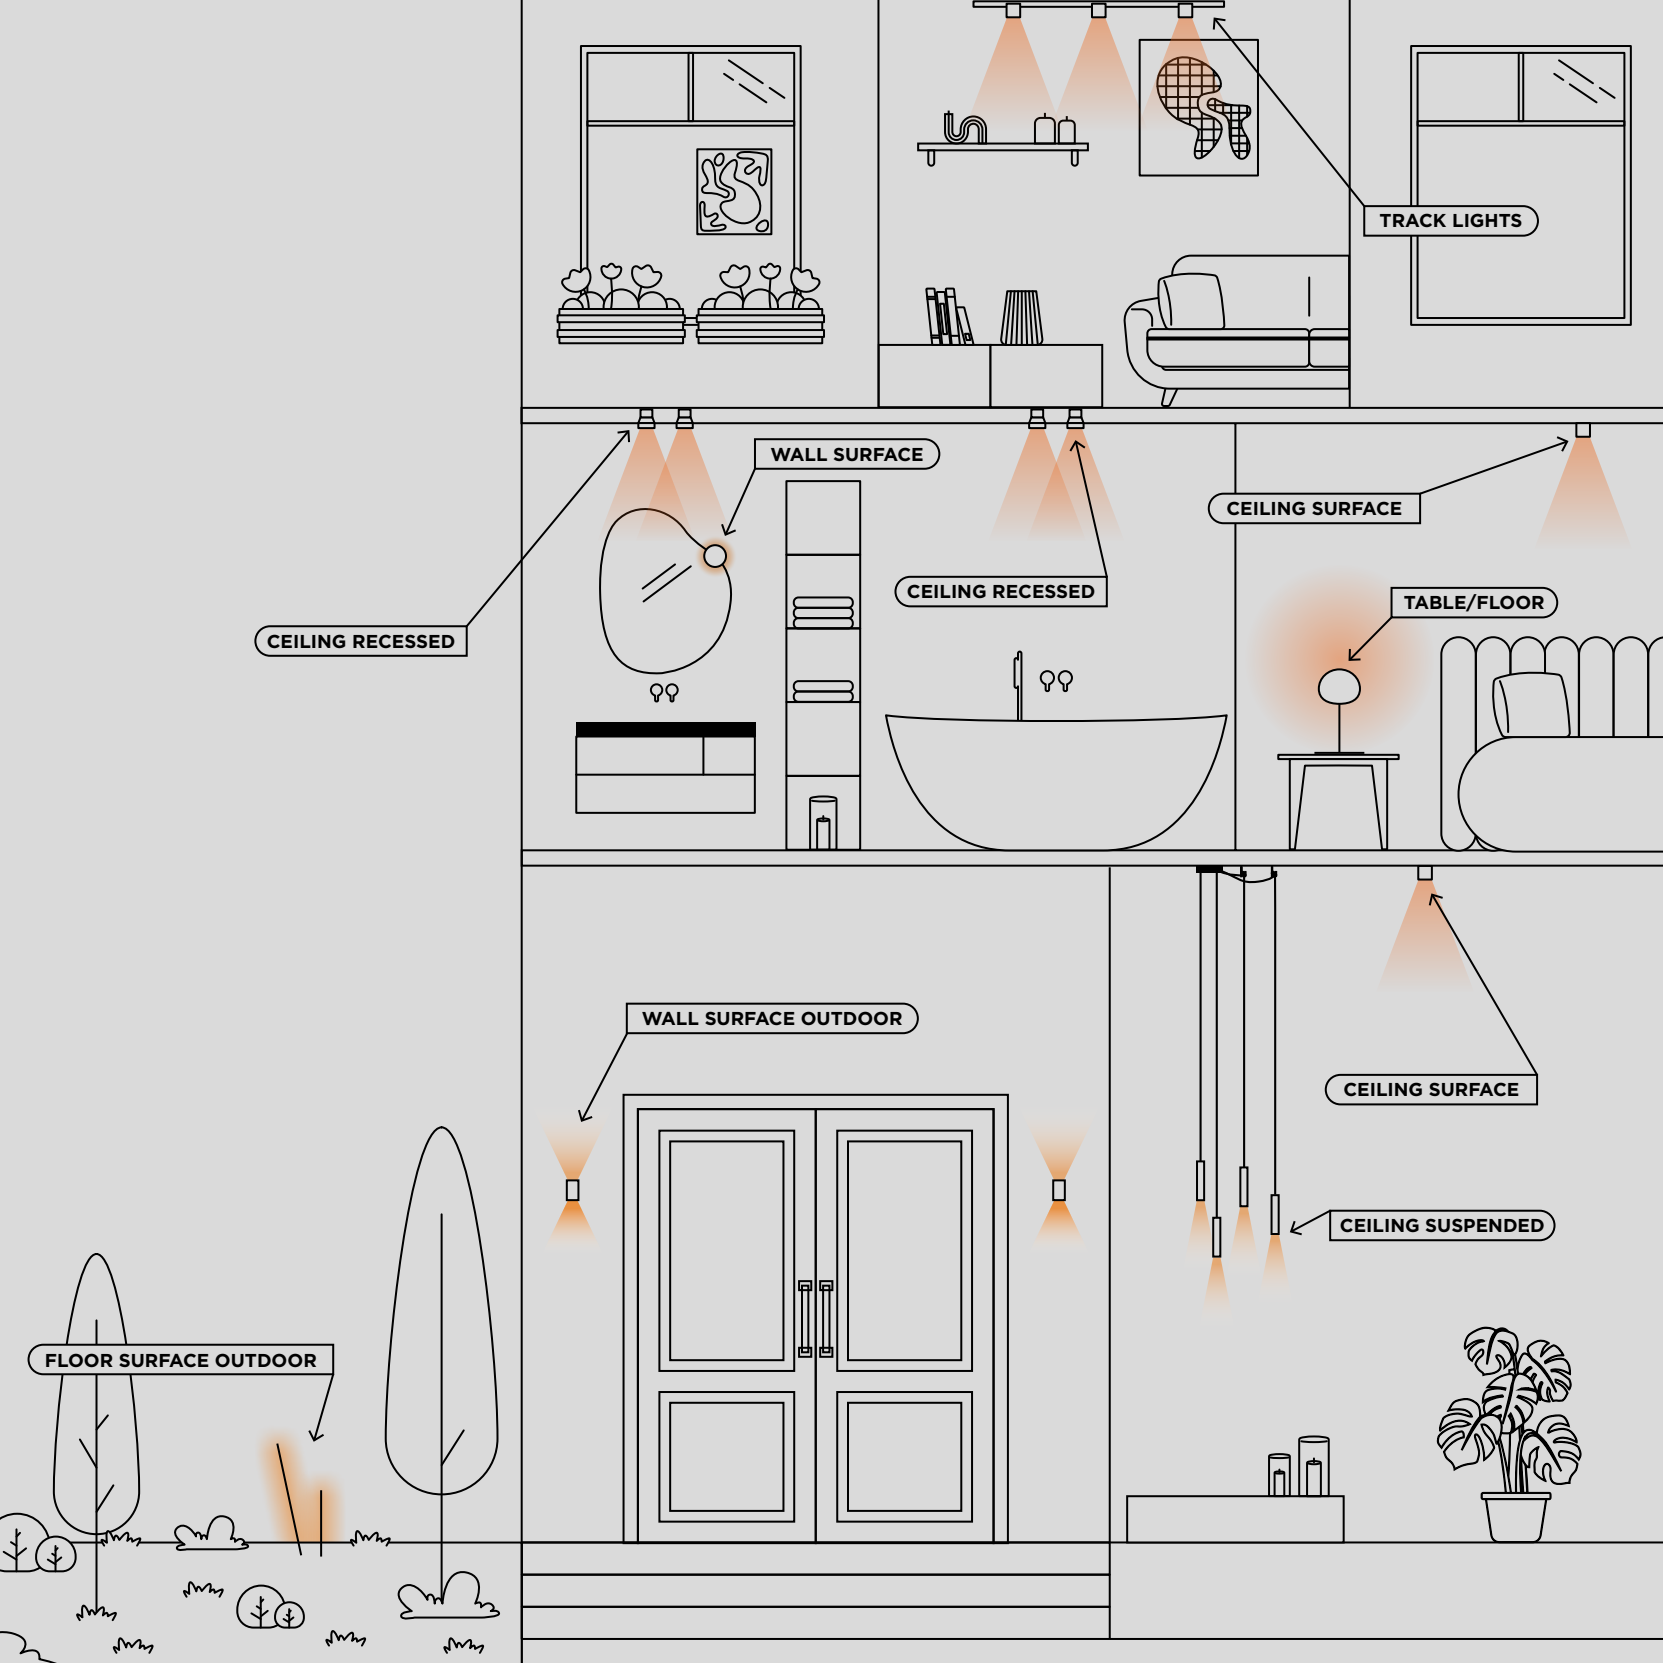


THREE OF US IS A PRODUCT FAMILY

Sie lieben ein Design so sehr, dass Sie es überall um sich haben möchten? Dann achten Sie auf die Mounting Icons! Wenn Sie dort mindestens drei entdecken, gehört die Leuchte zu einer Familie – perfekt, um Räume im einheitlichen Stil zu gestalten. Auch draußen – mit unseren Outdoor-Varianten.

Vous aimez tellement un design que vous le voudriez partout ? Alors, regardez les Mounting Icons ! S’il y en a au moins trois, le luminaire fait partie d’une famille – parfait pour créer une harmonie dans vos espaces. Et bonne nouvelle : nos versions outdoor le permettent aussi.

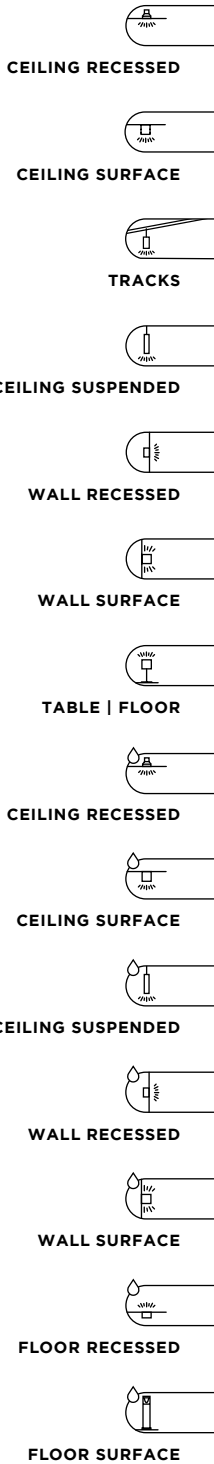

Highlight families

CENO	 SEMI-RECESSED 131	 SURFACE 181	 ON STREX 321	 WALL 585				
MATCH	 RECESSED 61	 SEMI-RECESSED 137	 SURFACE 193	 ON STREX 329	 ON STREX SUSPENDED 347 509	 LUSTA 415	 SNOOZE WALL RECESSED 571	 WALL 589
 SNOOZE WALL SURFACE 685		 TABLE 723	 FLOOR 729					
TRACE	 SURFACE 261	 SPIN 269	 GRID 273	 MINI ON STREX 331	 ON STREX SUSPENDED 351 511	 CHANDELIER 417	 WALL 591	 SLIM WALL 595
FINLIN	 SURFACE 263	 SUSPENDED 433	 WALL 673	 WALL ROUND 679	 FLOOR 727			
ODREY	 ON STREX 353	 ON 1-PHASE TRACK 379	 SUSPENDED 517	 WALL 599				
LECA	 RECESSED 135	 SURFACE 189	 ON STREX 325	 SNOOZE 569				

PERLEZ								
	SEMI-RECESSED 169	SPIN 271	GRID 275	SURFACE 295	WALL 701	MIRROR CLIP 703		
ROOMOR								
	OFFICE SURFACE 293	OFFICE ON TRACK 395	SUSPENDED 495	OFFICE SUSPENDED 499	WALL 639	TABLE 725	FLOOR 735	
DRO								
	SURFACE 279	ON TRACK 373	SUSPENDED 465	WALL 623	TABLE / FLOOR 715	TABLE 717	FLOOR 731	
MIRRO								
	SURFACE 283	CEILING SOFT 285	SUSPENDED 467	SUSPENDED SOFT 471	WALL 625	WALL SOFT 629	TABLE 721	FLOOR 733
J.J.W.								
	SURFACE 289	SUSPENDED 479	SUSPENDED 481	WALL 633	WALL 635			
CLEA								
	SURFACE 287	SUSPENDED 557	WALL 631					
TRADORA								
	SURFACE 775	SUSPENDED 777	WALL 823					



I MADE YOU LOOK

Schwenkbare Spots wie LECA setzen nicht nur in Hotels, sondern auch zu Hause stilvolle Akzente. Für größere Bereiche gibt es LECA mit mehreren Spots – für gleichmäßiges Licht. Der runde Spot ist als Einbau-, Aufbau-, Snooze- oder STREX-Inset-Leuchte in drei Farben erhältlich.

Des spots orientables comme LECA créent des accents élégants, non seulement dans les hôtels mais aussi à la maison. Pour les espaces plus grands, LECA est disponible avec plusieurs spots – pour un éclairage uniforme. Le spot rond est proposé en version encastrée, en saillie, snooze ou en applique STREX, disponible en trois couleurs.



weverducre.com/leca

leca



finlin




FOLLOW THE LINE

Auf den ersten Blick wirkt FINLIN wie eine moderne Skulptur. Doch hinter dem filigranen Design stecken feine Aluminiumrohre, die für eine elegante Optik sorgen. Ob als Decken-, Pendel-, Steh- oder Wandleuchte – FINLIN überzeugt in Schwarz, Gold oder edlem Champagner.

À première vue, FINLIN ressemble à une sculpture moderne. Mais derrière son design délicat se cachent de fins tubes en aluminium pour un rendu élégant. Qu'elle soit plafonnier, suspension, lampadaire ou applique, FINLIN séduit en noir, or ou champagne raffiné.



weverducre.com/finlin

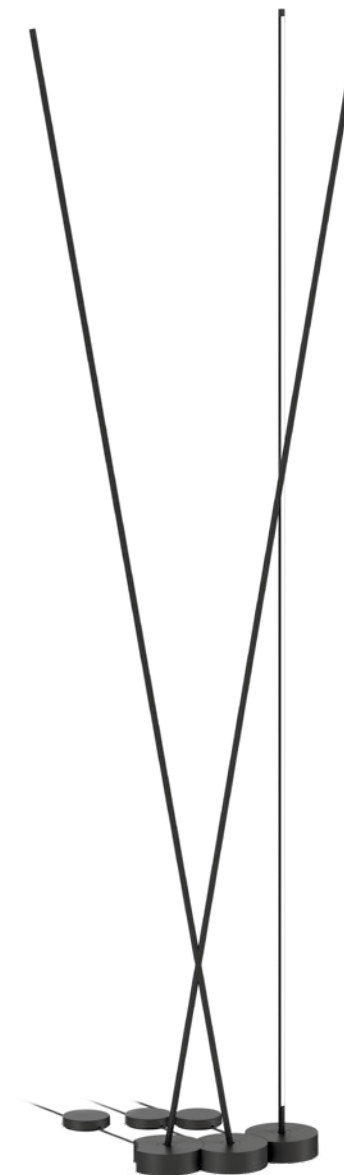

LIGHT A MATCH

Na, schon Feuer gefangen? Kein Wunder. Denn die Leuchten der MATCH-Family sind schlank wie Streichhölzer und lassen sich so ganz gezielt auf Objekte richten. Perfekt, um Bilder und Regale zu highlighten, bessere Sicht auf den Lieblingskrimi zu haben oder die Bar gekonnt in Szene zu setzen. Und das alles in einem klaren und einheitlichen Design.

Alors, vous avez flashé ? Pas étonnant. Les luminaires de la famille MATCH sont élancés comme des allumettes et peuvent être dirigés précisément vers les objets. Parfaits pour mettre en valeur des tableaux et des étagères, améliorer la visibilité de votre roman préféré ou sublimer votre bar. Et tout cela avec un design clair et uniforme.



weverducre.com/match

match



odrey



LITTLE BLACK LAMP

Sie versprüht den Charme der 50er – und wir reden nicht von Audrey Hepburn, sondern von unserer Leuchte ODREY. Ein echtes Must-have für jede Cocktailparty: wandelbar wie ein Filmstar und in schimmerndem Gold ebenso umwerfend wie in elegantem Schwarz, Bronze, Weiß oder Aluminium.

Elle dégage un charme des années 1950 – et nous ne parlons pas d’Audrey Hepburn, mais de notre luminaire ODREY. Un véritable indispensable pour toute soirée cocktail : aussi polyvalente qu’une star de cinéma et aussi éblouissante en or scintillant, qu’en noir élégant, en bronze, blanc, ou en aluminium.



weverducre.com/odrey

indoor

SPOT
LIGHTS



QITO
TRIMLESS
57



QITO
59



MATCH POINT
TRIMLESS
61



MATCH POINT
61



BLIEK PETIT
TRIMLESS
63



BLIEK PETIT
63



BLIEK
67



LINOO
TRIMLESS
71




LINOO
71




PIRRO PETIT
75



PIRRO
77




PLANO PETIT
83




PLANO
85




STRANGE PETIT
TRIMLESS
87



STRANGE
TRIMLESS
89



SNEAK
TRIMLESS
91



SNEAK
93



DEEP POINT
97



DEEP BIJOU
99



DEEP PETIT IQ
101



DEEP PETIT
103



DEEP IQ
105



DEEP
107



DEEPER
109



DEEP ADJUST
PETIT IQ
111



DEEP ADJUST
PETIT TRIMLESS
113



DEEP ADJUST
PETIT
113



DEEP ADJUST
IQ
115



DEEP ADJUST
TRIMLESS
117



DEEP ADJUST
119



RONY POINT
123



RONY PETIT
125



RONY ADJUST
PETIT
127



RONY ADJUST
129

SEMI
RECESSED



CENO
131



LECA
135



MATCH
TRIMLESS
137



MATCH
137



MATCH SNEAK
TRIMLESS
143



MATCH SNEAK
143



MATCH STICK
TRIMLESS
145



MATCH STICK
145



RUVI
147



PLANO IP44
151



MATCH POINT IP44
153



DEEP POINT IP44
155



DEEP BIJOU IP65
157



DEEP PETIT IP65
159



DEEP IP65 | IP44
161



DEEPER IP44
163



TAIO IP65
165



RINI SNEAK IP44
167



PERLEZ IP44
169




MIRBI IP44 1.0
171



MIRBI IP44 2.0
171



CITY IP44
173

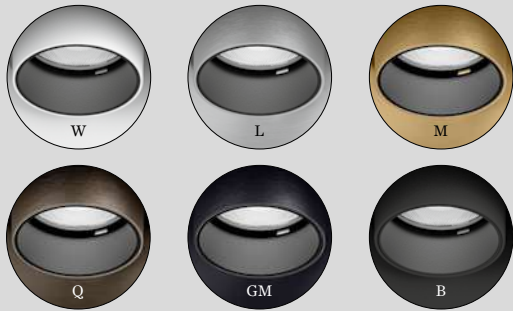

OPTIONAL

honeycomb louver	CHF	CODE
	20,05	915230B0


back

QITO

Ceiling recessed



177



1.0 TRIMLESS

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° M-3° L80|50K

	CHF	CODE
	176,65	198261W_
	198,75	198261L_
	198,75	198261M_
	198,75	198261Q_
	198,75	198261GM_
	176,65	198261B_





LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5

ALWAYS USE

alu plasterkit	78-80	11.80	12,5, 15, 20, 25
	CHF	CODE	
	30,40	90017210	

quick connect driver 250mA	CHF	CODE
5W dim	45,55	90226201
10W DALI*	89,05	90246403

*revision opening required
more options and specs on page 895



OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

QITO

Ceiling recessed



1.0

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° A M-31° L80|50K

blade springs 68-70 11.60 2-25

	CHF	CODE
	162,85	198161W_
	184,95	198161L_
	184,95	198161M_
	184,95	198161Q_
	184,95	198161GM_
	162,85	198161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim	45,55	90226201
10W DALI*	89,05	90246403

*revision opening required
more options and specs on page 895



1.0 TRIMLESS

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

45-47 60 4-26

	CHF	CODE
	113,85	191861B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	315 >90	3
3000K	335 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim	45,55	90226201
10W DALI	89,05	90246403

revision opening required
more options and specs on page 895



1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 28-31 50 4-25

	CHF	CODE
	71,80	191361W_
	71,80	191361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	315 >90	3
3000K	335 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim	45,55	90226201
10W DALI	89,05	90246403

revision opening required
more options and specs on page 895



1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	CHF	CODE
	89,70	191261W_
	89,70	191261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	295 >90	3
3000K	325 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim IP20	45,55	90226201
10W DALI IP20*	89,05	90246403

*revision opening required
more options and specs on page 895

MATCH point

Ceiling recessed



193



329 | 347



415 | 509




571



589 | 685



723 | 729





1.0 trimless | 1.0
low recessed



LOXONE VERSIONS ONLINE
weverducre.com/more-match-point



RESTAURANT AUX PETITS OIGNONS | COVARTE JODOIGNE | BELGIUM

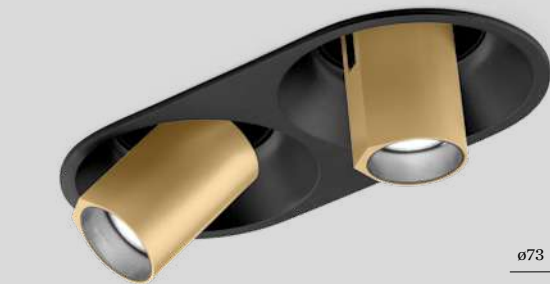

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

	CHF	CODE
	205,65	164561W_
	205,65	164561CH_
	205,65	164561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	495 >90	3
3000K	530 >90	5
2000-3000K 16V	340 >90	9

ALWAYS USE


alu plasterkit 78-80 1.85 12,5, 15, 20, 25

	CHF	CODE
	30,40	90017210

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI	89,05	90243502

*revision opening required and more options and specs on page 898



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 86-89 1.60 4-23

	CHF	CODE
	191,85	164461W_
	191,85	164461CH_
	191,85	164461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	495 >90	3
3000K	530 >90	5
2000-3000K 16V	340 >90	9

ALWAYS USE


quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI*	89,05	90243502

*revision opening required and more options and specs on page 898

BLIEK petit

Ceiling recessed



2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 87x176 1.60 4-23

	CHF	CODE
	328,45	164261W_
	328,45	164261CH_
	328,45	164261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x495 >90	3
3000K	2x530 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CHF	CODE
14W dim	53,85	90225502
28W DALI	92,50	90245704

more options and specs on page 900





PRIVATE RESIDENCE | UMAMI STUDIO BELGIUM



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-bliek-round



BLIEK

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-60°/355° A M-33° L80|55K

wire springs 127 11.75 4-25

	CHF	CODE
	288,45	125361W_
	288,45	125361K_
	288,45	125361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600/810 >90	3
3000K	635/855 >90	5
4000K	670/905 >90	7
2000-3000K	445/660 >90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-60°/350°

wire springs 127 11.75 4-25

	CHF	CODE
	204,25	125120W0
	204,25	125120K0
	204,25	125120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5


more lamps and info on page 905

hidden

HIDDEN CHAMPIONS


Schlichte Einbauleuchten rücken dezent in den Hintergrund und setzen jeden Raum perfekt in Szene. Doch niedrige Decken oder wenig Platz machen den Einbau oft schwierig. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré – kompakt, stilvoll und ideal für Renovierungen und kleine Apartments.

Des luminaires encastrés discrets restent élégants en arrière-plan tout en sublimant chaque pièce. Mais les plafonds bas ou l'espace limité compliquent souvent l'installation. La solution : des luminaires encastrés ultra-plats de Wever & Ducré – compacts, élégants et idéals pour les rénovations et les petits appartements.

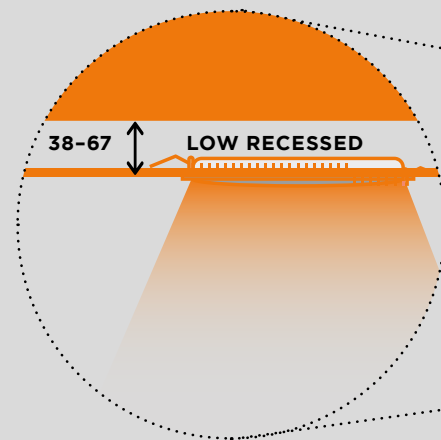

QITO 1.0	p. 57	60 mm
MATCH point 1.0 trimless	p. 61	60 mm
MATCH point 1.0	p. 61	50 mm
BLIEK petit 1.0 2.0	p. 63	60 mm
LINOO	p. 71	60 mm
PIRRO petit	p. 75	60 mm
PIRRO 2.0 4.0 6.0	p. 77	60 mm
PLANO petit	p. 83	65 mm
STRANGE petit trimless	p. 87	65 mm
DEEP bijou 2.0	p. 99	67 mm
DEEP petit	p. 103	60 mm
DEEP ADJUST petit	p. 113	65 mm

RONY point	p. 123	60 mm
RONY petit	p. 125	51 mm
RONY ADJUST petit	p. 127	63 mm
CENO 2.0 3.0	p. 133	60 mm
MATCH 1.0 trimless	p. 137	67 mm
MATCH 2.0	p. 141	60 mm
MATCH sneak	p. 143	53 mm
MATCH stick 1.0 1.0 trimless	p. 145	67 mm
DEEP petit IP65	p. 159	60 mm
RINI SNEAK IP44	p. 167	52 mm
MIRBI IP44	p. 171	50 mm
CITY IP44	p. 173	50 mm










LINOO

Ceiling recessed



211



4.0

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80/50K

wire springs 118x36 L60 4-28

	CHF	CODE
2700K/3000K CRI >90 4x125lm		
135,25	109161WW9	
135,25	109161BB9	

ALWAYS USE

	CHF	CODE
driver 350mA		
10W dim	49,00	90223406
14W DALI	89,05	90243502
more options and specs on page 896		

4.1

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80/50K

wire springs 63x59 L60 4-28

	CHF	CODE
2700K/3000K CRI >90 4x125lm		
127,00	109261WW9	
127,00	109261BB9	

ALWAYS USE

	CHF	CODE
driver 350mA		
10W dim	49,00	90223406
14W DALI	89,05	90243502
more options and specs on page 896		

8.0

LED PCB 16W | 700mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch



IP20 M-39° L80/50K

wire springs 226x36 L60 4-28

	CHF	CODE
2700K/3000K CRI >90 8x125lm		
218,05	109361WW9	
218,05	109361BB9	




ALWAYS USE

	CHF	CODE
driver 700mA		
20W dim	62,80	90225604
14W DALI	92,50	90245704
more options and specs on page 900		





PRIVATE RESIDENCE | ORNELLA ABOUAF FRANCE

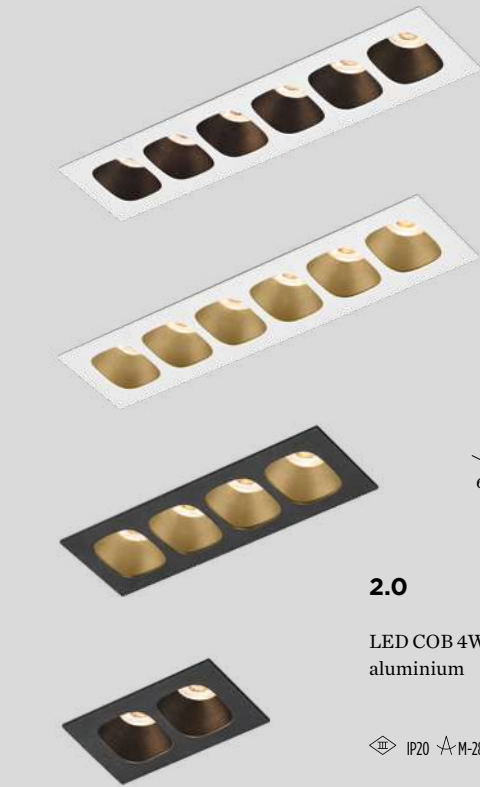

2.0

LED COB 4W | 350mA | 12V
aluminium

IP20 M-28° L80|50K

wire springs 64x33 60 4-25

4.0

LED COB 8W | 350mA | 24V
aluminium

IP20 M-28° L80|50K



wire springs 116x33 60 4-25

6.0

LED COB 12W | 350mA | 36V
aluminium

IP20 M-28° L80|50K

wire springs 168x33 60 4-25



LOXONE VERSIONS ONLINE
weverducre.com/more-pirro-petit

	CHF	CODE
	113,20	129151E_
	113,20	129151WM_
	113,20	129151CH_
	113,20	129151B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x160 >90	3
3000K	2x165 >90	5

ALWAYS USE

driver 350mA	CHF	CODE
4.5W dim	45,55	90223101
14W DALI	89,05	90243502
revision opening required		
more options and specs on page 897		

	CHF	CODE
	176,65	129251E_
	176,65	129251WM_
	176,65	129251CH_
	176,65	129251B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x160 >90	3
3000K	4x165 >90	5

ALWAYS USE




driver 350mA	CHF	CODE
10W dim	49,00	90223406
14W DALI	89,05	90243502
more options and specs on page 896		

	CHF	CODE
	245,65	129351E_
	245,65	129351WM_
	245,65	129351CH_
	245,65	129351B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x160 >90	3
3000K	6x165 >90	5

ALWAYS USE

driver 350mA	CHF	CODE
13W dim	58,65	90223404
14W DALI	89,05	90243502
more options and specs on page 896		



1.0

LED COB 5W | 500mA | 9V
aluminium

IP20 M-32° L70|55K

wire springs 50x50 60 4-25

	CHF	CODE
	107,65	150161E_
	107,65	150161J_
	107,65	150161K_
	107,65	150161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	395 >90	3
3000K	410 >90	5

ALWAYS USE

driver | 500mA

	CHF	CODE
6W	45,55	90214201
6.5W dim*	35,20	90224301
24W DALI*	92,50	90244701

*revision opening required
more options and specs on page 897

2.0

LED COB 9W | 500mA | 18V
aluminium

IP20 M-32° L70|55K

wire springs 93x50 60 4-25

	CHF	CODE
	135,25	150261E_
	135,25	150261J_
	135,25	150261K_
	135,25	150261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x395 >90	3
3000K	2x410 >90	5

ALWAYS USE




driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
24W DALI	92,50	90244701

more options and specs on page 897



PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN THE NETHERLANDS

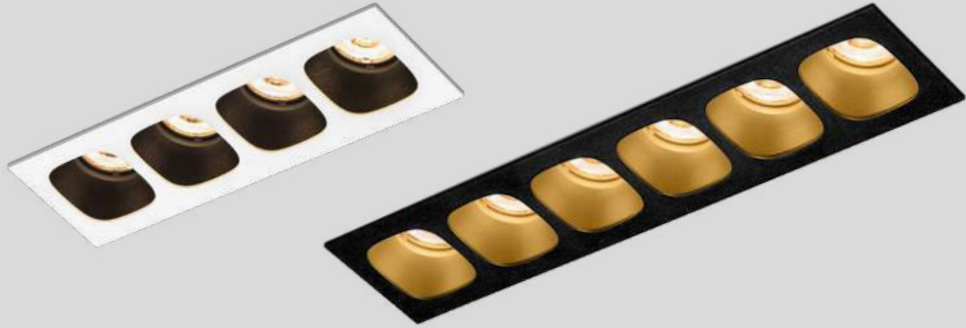

4.0

LED COB 17W | 500mA | 36V
aluminium

IP20 M-32° L70|55K

wire springs 181x50 4-25

	CHF	CODE
	205,65	150461E
	205,65	150461J
	205,65	150461K
	205,65	150461B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x395 >90	3
3000K	4x410 >90	5

ALWAYS USE

driver | 500mA | only 1x needed

	CHF	CODE
17.5W	53,85	90218601
19W dim	62,80	90224602
24W DALI	92,50	90244701

more options and specs on page 898

6.0

LED COB 25W | 500mA | 2x27V
aluminium

IP20 M-32° L70|55K

wire springs 269x50 4-25

	CHF	CODE
	273,25	150661E
	273,25	150661J
	273,25	150661K
	273,25	150661B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x395 >90	3
3000K	6x410 >90	5

ALWAYS USE


driver | 500mA | 2x needed

	CHF	CODE
17.5W	53,85	90218601
19W dim	62,80	90224602
24W DALI	92,50	90244701




more options and specs on page 898







MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-plano-petit

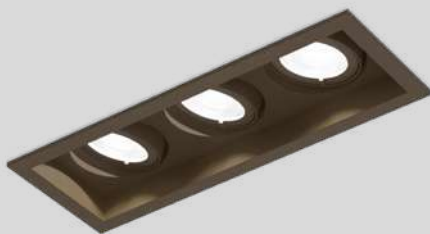

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x59 11.65 2-22

	CHF	CODE
	135,25	162461W_
	135,25	162461Q_
	135,25	162461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	550 >90	3
3000K	580 >90	5
2000-3000K 16V	465 >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896



2.0

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x110 11.65 2-22

	CHF	CODE
	233,25	162561W_
	233,25	162561Q_
	233,25	162561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x550 >90	3
3000K	2x580 >90	5
2000-3000K 16V	2x465 >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA
2x needed

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI	89,05	90243502

more options and specs on page 896



3.0

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x162 11.65 2-22

	CHF	CODE
	328,45	162661W_
	328,45	162661Q_
	328,45	162661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x550 >90	3
3000K	3x580 >90	5
2000-3000K 16V	3x465 >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA
3x needed

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI	89,05	90243502

more options and specs on page 896

PLANO petit



Ceiling recessed





PLANO

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x78 95 2-18

	CHF	CODE
	142,15	118561W_
	142,15	118561Q_
	142,15	118561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610/820 >90	3
3000K	645/870 >90	5
2000-3000K	450/665 >90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898



2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x148 95 2-18

	CHF	CODE
	260,85	118661W_
	260,85	118661Q_
	260,85	118661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x610/820 >90	3
3000K	2x645/870 >90	5
2000-3000K	2x450/665 >90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA
2x needed

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x78 125 2-18

	CHF	CODE
	67,65	118120W0
	67,65	118120Q0
	67,65	118120B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	445lm	22,80 901228W3
2700K	440lm	22,80 901228B3
3000K	465lm	22,80 901228W5
3000K	460lm	22,80 901228B5


more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x148 125 2-18

	CHF	CODE
	113,20	118220W0
	113,20	118220Q0
	113,20	118220B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	445lm	22,80 901228W3
2700K	440lm	22,80 901228B3
3000K	465lm	22,80 901228W5
3000K	460lm	22,80 901228B5

more lamps and info on page 905


OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905








LOXONE VERSIONS ONLINE
weverducre.com/more-strange-petit

STRANGE petit

Ceiling recessed



1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L80|55K

	CHF	CODE
	142,15	163461W_
	142,15	163461M_
	142,15	163461Q_
	142,15	163461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	550 >90	3
3000K	580 >90	5
2000-3000K	465 >90	9

LED module 20 years replaceability

2.0 TRIMLESS

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L80|55K

	CHF	CODE
	245,65	163561W_
	245,65	163561M_
	245,65	163561Q_
	245,65	163561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x550 >90	3
3000K	2x580 >90	5
2000-3000K	2x465 >90	9

LED module 20 years replaceability

3.0 TRIMLESS

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L80|55K

	CHF	CODE
	346,40	163661W_
	346,40	163661M_
	346,40	163661Q_
	346,40	163661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x550 >90	3
3000K	3x580 >90	5
2000-3000K	3x465 >90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 64x64 65 7-32

	CHF	CODE
	51,10	90017202

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI	89,05	90243502

more options and specs on page 896

ALWAYS USE

alu plasterkit 64x117 65 7-32

	CHF	CODE
	53,85	90017205

quick connect driver | 350mA
2x needed

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI	89,05	90243502

more options and specs on page 897

ALWAYS USE

alu plasterkit 64x169 65 7-32

	CHF	CODE
	59,35	90017208

quick connect driver | 350mA
3x needed


	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI	89,05	90243502

more options and specs on page 896



STRANGE trimless

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	CHF	CODE
	153,20	131461W_
	153,20	131461Q_
	153,20	131461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610/820	>90	3
3000K	645/870	>90	5
2000-3000K	450/665	>90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 86x86 11.95 7-32

	CHF	CODE
	56,60	90017120

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898



2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	CHF	CODE
	290,50	131561W_
	290,50	131561Q_
	290,50	131561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x610/820	>90	3
3000K	2x645/870	>90	5
2000-3000K	2x450/665	>90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 86x156 11.95 7-32

	CHF	CODE
	62,10	90017121

quick connect driver | 500mA
2x needed

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 905



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CHF	CODE
	78,70	131120W0
	78,70	131120Q0
	78,70	131120B0

ALWAYS USE

alu plasterkit 86x86 11.125 7-32


	CHF	CODE
	56,60	90017120

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CHF	CODE
	142,85	131220W0
	142,85	131220Q0
	142,85	131220B0

ALWAYS USE

alu plasterkit 86x156 11.125 7-32

	CHF	CODE
	62,10	90017121

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905






PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



LOXONE VERSIONS ONLINE
weverducre.com/more-sneak

SNEAK

Ceiling recessed



1.0 TRIMLESS

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°/355° M-30° L80/55K

	CHF	CODE
	171,15	155551WW_
	175,30	155551BM_
	171,15	155551BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	340/460 >90	3
3000K	360/485 >90	5
2000-3000K	250/370 >90	9

LED module 20 years replaceability

2.0 TRIMLESS

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°/355° M-30° L80/55K

	CHF	CODE
	326,40	155651WW_
	334,65	155651BM_
	326,40	155651BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x340/460 >90	3
3000K	2x360/485 >90	5
2000-3000K	2x250/370 >90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x86 11.95 €7-32

	CHF	CODE
	56,60	90017120

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

ALWAYS USE

alu plasterkit 86x156 11.95 €7-32

	CHF	CODE
	62,10	90017121

quick connect driver | 500mA
2x needed

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501




more options and specs on page 898



back



LOXONE VERSIONS ONLINE
weverducre.com/more-sneak

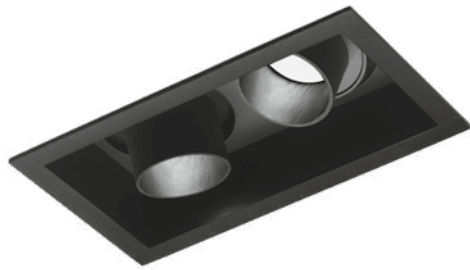

1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x78 95 2-18

	CHF	CODE
	160,10	155751WW_
	164,25	155751BM_
	160,10	155751BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/460	>90	3
3000K	360/485	>90	5
2000-3000K	250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

2.0

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x148 95 2-18

	CHF	CODE
	296,70	155851WW_
	305,00	155851BM_
	296,70	155851BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x340/460	>90	3
3000K	2x360/485	>90	5
2000-3000K	2x250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA
2x needed

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

how deep



weverducre.com/deep

DEEP



point 1.0
LED
p. 97



bijou 1.0
LED
p. 99



bijou 2.0
LED
p. 99




petit 1.0
LED
p. 103




1.0
LED | PAR16
p. 107




point IP44 1.0
LED
p. 155



bijou IP65 1.0
LED
p. 157




petit IP65 1.0
LED
p. 159



IP65 | IP44 1.0
LED | PAR16
p. 161


DEEP ADJUST




petit 1.0
LED
p. 113




petit trimless 1.0
LED
p. 113



1.0
LED | PAR16
p. 119



trimless 1.0
LED | PAR16
p. 117



2.0
LED | PAR16
p. 121

DEEP CONNECTIONS

DEEP und DEEPER liefern klassisches Downlight für Flur, Wohnzimmer oder Bad – auf Wunsch auch als IP44 oder IP65 für spritz- und strahlwassergeschützte Anwendungen. Ergänzt wird die Familie nun durch DEEP IQ aus 3D-gedrucktem Material sowie die nahezu unsichtbaren Trimless-ADJUST-Varianten.

DEEP et DEEPER offrent un éclairage directionnel classique pour les couloirs, salons ou salles de bain – en option en IP44 ou IP65 pour une protection contre les éclaboussures et les jets d'eau. La gamme s'enrichit désormais de DEEP IQ en matériau imprimé en 3D, ainsi que des variantes ADJUST sans cadre presque invisibles.

DEEPER



1.0
LED | PAR16
p. 109



IP44 1.0
LED | PAR16
p. 163

DEEP IQ



petit 1.0
LED
p. 101




1.0
LED
p. 105

DEEP ADJUST IQ



petit 1.0
LED
p. 111




1.0
LED
p. 115



PRIVATE RESIDENCE SPAIN



LOXONE VERSIONS ONLINE
weverducre.com/more-deep-point



DEEP point

Ceiling recessed



155



1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 40-41 1.68 4-25

	CHF	CODE
	67,65	185261W_
	67,65	185261M_
	67,65	185261Q_
	67,65	185261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	425 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim	45,55	90226201
10W DALI	89,05	90246403

revision opening required
more options and specs on page 895



1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 1.68 4-25

	CHF	CODE
	85,60	185161W_
	85,60	185161Q_
	85,60	185161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	355 >90	3
3000K	400 >90	5

ALWAYS USE



quick connect driver | 250mA

	CHF	CODE
5W dim	45,55	90226201
10W DALI	89,05	90246403

revision opening required
more options and specs on page 895




MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-bijou



DEEP bijou

Ceiling recessed



1.0

LED COB 4W | 250mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 50-52 85 4-25

	CHF	CODE
	78,70	165161W_
	78,70	165161M_
	78,70	165161G_
	78,70	165161Q_
	78,70	165161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim	45,55	90226201
10W DALI*	89,05	90246403

*revision opening required
more options and specs on page 895

2.0

2x LED COB 4W | 250mA | 34V
aluminium

IP20 M-31° L80|50K

wire springs 50-52x100-104 67 4-25

	CHF	CODE
	150,45	165261W_
	150,45	165261M_
	150,45	165261G_
	150,45	165261Q_
	150,45	165261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x510 >90	5

ALWAYS USE


quick connect driver | 250mA
only 1x needed

	CHF	CODE
10.5W dim	45,55	90226501
10W DALI	89,05	90246403

more options and specs on page 895




MORE VERSIONS ONLINE
weverducre.com/more-deep-petit-iq



DEEP petit IQ

Ceiling recessed



1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 W-41° L80|80K

blade springs 74-76 85 min.8

	CHF	CODE
	121,45	199151W_
	121,45	199151SG_
	121,45	199151RP_
	121,45	199151B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >90	3
3000K	370 >90	5

ALWAYS USE

quick connect driver | 200mA

	CHF	CODE
10W dim*	45,55	90226402
8W DALI	89,05	90246302



*min. 2 luminaires per driver
more options and specs on page 894



PRIVATE RESIDENCE | ROOD3 INTERIEURONTWERP BELGIUM



LOXONE VERSIONS ONLINE
weverducre.com/more-deep-petit



DEEP petit

Ceiling recessed



45

ø80

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 68-70 60 4-23

	CHF	CODE
	109,05	153561W_
	109,05	153561M_
	109,05	153561G_
	109,05	153561Q_
	109,05	153561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	615 >90	3
3000K	650 >90	5
2000-3000K 16V	465 >90	9

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896



55

ø80

1.0 IP65

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs 68-70 60 4-25

	CHF	CODE
	132,50	153761W_
	132,50	153761Q_
	132,50	153761B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	590 >90	3
3000K	615 >90	5

ALWAYS USE


driver | 350mA

	CHF	CODE
6W IP20	35,20	90213303
10w dim IP20	49,00	90223406
17W IP68*	95,25	90213602

*revision opening required
more options and specs on page 896




MORE VERSIONS ONLINE
weverducre.com/more-deep-iq



DEEP IQ

Ceiling recessed



1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 M-40° L80|80K

blade springs 85-87 11.77 min.8

	CHF	CODE
	144,90	199351W_
	144,90	199351SG_
	144,90	199351RP_
	144,90	199351B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	780 >90	3
3000K	800 >90	5

ALWAYS USE

quick connect driver | 180mA

	CHF	CODE
7.5W dim	45,55	90226202
7.2W DALI	89,05	90246301

more options and specs on page 894




LOOTENS | OR ARCHITECTEN | WIM LAHOUSSE HARELBEKE | BELGIUM



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep

DEEP

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 M-34° L80I55K

wire springs 76-79 115 4-27

	CHF	CODE
	131,10	184261W_
	131,10	184261M_
	131,10	184261G_
	131,10	184261Q_
	131,10	184261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/855	>90	3
3000K	670/905	>90	5
4000K	710/955	>90	7
2000-3000K	470/695	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 115 4-27


	CHF	CODE
	40,05	112120W0
	40,05	112120M0
	40,05	112120G0
	40,05	112120Q0
	40,05	112120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905





PRIVATE RESIDENCE | STUDIO ZUYD THE NETHERLANDS



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deeper



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 A-M-34° L80|55K

wire springs 76-79 90 4-38

	CHF	CODE
	141,45	152361W_
	141,45	152361M_
	141,45	152361Q_
	141,45	152361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	635/850 >90	3
3000K	670/900 >90	5
2000-3000K	470/695 >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

DEEPER

Ceiling recessed



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 120 4-38


	CHF	CODE
	66,95	152120W0
	66,95	152120M0
	66,95	152120Q0
	66,95	152120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5


more lamps and info on page 905



MORE VERSIONS ONLINE
weverducre.com/more-deep-adjust-petit-iq

DEEP ADJUST petit IQ

Ceiling recessed



1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 0°-25°|360° W-41° L80|80K

blade springs 74-76 87 min.8

	CHF	CODE
	135,25	199251W_
	135,25	199251SG_
	135,25	199251RP_
	135,25	199251B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >90	3
3000K	370 >90	5


ALWAYS USE

quick connect driver | 200mA



	CHF	CODE
10W dim*	45,55	90226402
8W DALI	89,05	90246302

*2 luminaires per driver
more options and specs on page 894



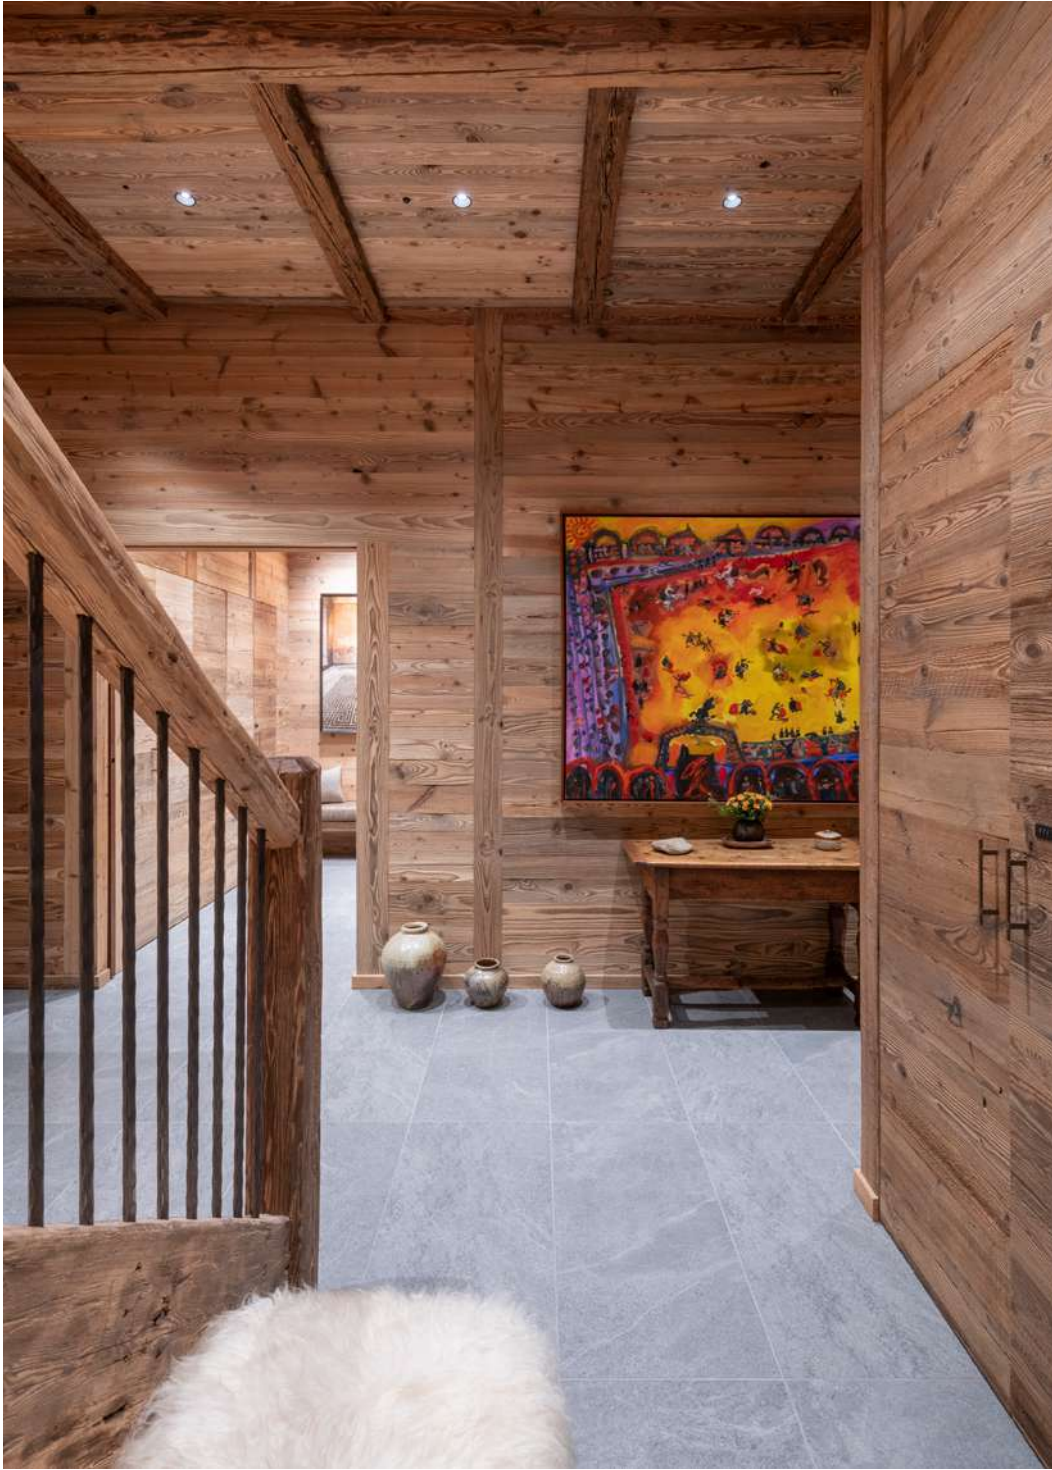

MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-adjust-petit



DEEP ADJUST petit

Ceiling recessed



1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|360° A-M-31° L70|50K

	CHF	CODE
	128,35	153461W_
	128,35	153461Q_
	128,35	153461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	555 >90	3
3000K	585 >90	5
2000-3000K 16V	470 >90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 78-80 11.65 12,5, 15, 20, 25

	CHF	CODE
	30,40	90017210

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI*	89,05	90243502

*revision opening required and
more options and specs on page 896

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|355° A-M-31° L70|50K

	CHF	CODE
	123,55	153661W_
	123,55	153661M_
	123,55	153661G_
	123,55	153661SG_
	123,55	153661ME_
	123,55	153661Q_
	123,55	153661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	555 >90	3
3000K	585 >90	5
2000-3000K 16V	470 >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA



	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI*	89,05	90243502

*revision opening required and
more options and specs on page 896



DEEP ADJUST IQ

Ceiling recessed



1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 0°-21°|360° A M-40° L80|80K

blade springs ⌀85-87 11.85 min.8

	CHF	CODE
	160,10	199451W_
	160,10	199451SG_
	160,10	199451RP_
	160,10	199451B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	780 >90	3
3000K	800 >90	5

ALWAYS USE

quick connect driver 180mA		
	CHF	CODE
7W dim	45,55	90226202
7.2W DALI	89,05	90246301
more options and specs on page 894		



MORE VERSIONS ONLINE
weverducre.com/more-deep-adjust-iq






MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-adjust-trimless

DEEP ADJUST trimless

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	CHF	CODE
	151,80	184861W_
	151,80	184861M_
	151,80	184861Q_
	151,80	184861B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	635/855 >90	3
3000K	670/905 >90	5
4000K	710/955 >90	7
2000-3000K	470/695 >90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 105-110 11,95 €12,5, 15, 20, 25

	CHF	CODE
	35,90	90017209

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CHF	CODE
	77,30	112820W0
	77,30	112820M0
	77,30	112820Q0
	77,30	112820B0

ALWAYS USE

alu plasterkit 105-110 11,120 €12,5, 15, 20, 25

	CHF	CODE
	35,90	90017209

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-adjust

DEEP ADJUST

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 86-89 115 4-23

	CHF	CODE
	135,95	184361W_
	135,95	184361M_
	135,95	184361G_
	135,95	184361Q_
	135,95	184361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/855	>90	3
3000K	670/905	>90	5
4000K	710/955	>90	7
2000-3000K	470/695	>90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 86-89 115 4-23

	CHF	CODE
	61,45	112320W0
	61,45	112320M0
	61,45	112320G0
	61,45	112320Q0
	61,45	112320B0

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



LOXONE VERSIONS ONLINE
weverducre.com/more-deep-adjust



2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 89x172-178 11,90 4-23

	CHF	CODE
	265,00	184761W_
	265,00	184761M_
	265,00	184761Q_
	265,00	184761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x635/855	>90	3
3000K	2x670/905	>90	5
4000K	2x710/955	>90	7
2000-3000K	2x470/695	>90	9

LED module 20 years replaceability

ALWAYS USE


quick connect driver | 500mA
2x needed

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

DEEP ADJUST

Ceiling recessed



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 89x172-178 11,15 4-23

	CHF	CODE
	117,30	112720W0
	117,30	112720M0
	117,30	112720Q0
	117,30	112720B0

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905




MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-rony-point



RONY point

Ceiling recessed



1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 48-51 60 4-25

	CHF	CODE
	75,90	193161W_
	75,90	193161Q_
	75,90	193161B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	425 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim	45,55	90226201
10W DALI*	89,05	90246403



*revision opening required
more options and specs on page 895



back



LOXONE VERSIONS ONLINE
weverducre.com/more-rony-petit



RONY petit

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80/50K

wire springs 68-70 1.51 4-24

	CHF	CODE
	118,70	110361W_
	118,70	110361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	650 >90	3
3000K	685 >90	5
2000K-3000K 16V	495 >90	9

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896



PRIVATE RESIDENCE | STUDIO BINNEN THE NETHERLANDS



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-rony-adjust-petit

RONY ADJUST petit

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°/355° M-31° L80/50K

wire springs 68-70 63 4-22


	CHF	CODE
	133,90	110461W_
	133,90	110461Q_
	133,90	110461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	555 >90	3
3000K	585 >90	5
2000K-3000K 16V	470 >90	9

ALWAYS USE

	CHF	CODE
6W	35,20	90213303
10W dim	49,00	90223406
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896





PRIVATE RESIDENCE | CANDICE BRUNY FRANCE



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-rony-adjust

RONY ADJUST

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° A-M-34° L80|55K

wire springs 102-104 90 4-25

	CHF	CODE
	183,55	110261W_
	183,55	110261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	635/860 >90	3
3000K	675/905 >90	5
2000-3000K	475/700 >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W	35,20	90214406
10W dim	51,75	90224403
15W DALI	89,05	90244501

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 102-104 110 4-25

	CHF	CODE
	109,05	110120W0
	109,05	110120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5


more lamps and info on page 905



back



PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN THE NETHERLANDS




1.0 SEMI RECESSED

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

	CHF	CODE
	197,35	176561W_
	197,35	176561B_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	500 >90	3
3000K	530 >90	5



OPTIONAL

honeycomb louver	CHF	CODE
	20,05	915230B0



MORE VERSIONS ONLINE
weverducre.com/more-ceno

CENO

Ceiling recessed



181



321



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

wire springs 45-47 175 4-26

	CHF	CODE
	186,30	176161W_
	186,30	176161G_
	186,30	176161Q_
	186,30	176161K_
	186,30	176161CH_
	186,30	176161B_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	500 >90	3
3000K	530 >90	5
2000-3000K 16V	345 >90	9

ALWAYS USE

driver 350mA	CHF	CODE
6W	35,20	90213303
7W dim	46,25	90223301
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896

ALWAYS USE

quick connect driver 350mA	CHF	CODE
6W	35,20	90213303
7W dim	46,25	90223301
14W DALI	89,05	90243502

revision opening required
more options and specs on page 896





OFFICE BOES & VERRUE | ARCHITECT DEWITTE KORTRIJK | BELGIUM

CENO

Ceiling recessed

2.0 | 3.0
low recessed

IC rated

honeycomb

OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

LOXONE VERSIONS ONLINE

weverducre.com/more-ceno-recessed

1.1

LED COB 6W | 350mA | 17V
aluminium

◈ IP20 0°-90°|350° ◈ M-31° L70|55K

blade springs 32x66 75 min. 4

	CHF	CODE
	186,30	176461W_
	186,30	176461Q_
	186,30	176461K_
	186,30	176461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	500 >90	3
3000K	530 >90	5

2.0

2x LED COB 6W | 700mA | 17V
aluminium

◈ IP20 0°-90°|350° ◈ M-31° L70|55K

blade springs 32x145 60 min. 4

	CHF	CODE
	259,45	176261W_
	259,45	176261Q_
	259,45	176261K_
	259,45	176261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x500 >90	3
3000K	2x530 >90	5

3.0

3x LED COB 6W | 700mA | 26V
aluminium

◈ IP20 0°-90°|350° ◈ M-31° L70|55K

blade springs 32x221 60 min. 4

	CHF	CODE
	328,45	176361W_
	328,45	176361Q_
	328,45	176361K_
	328,45	176361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x500 >90	3
3000K	3x530 >90	5

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
7W dim	46,25	90223301
14W DALI	89,05	90243502

more options and specs on page 896

LOXONE VERSIONS ONLINE

weverducre.com/more-ceno-recessed

ALWAYS USE

driver | 700mA | only 1x needed

	CHF	CODE
14W dim	53,85	90225502
28W DALI	92,50	90245704

more options and specs on page 900

LOXONE VERSIONS ONLINE

weverducre.com/more-ceno-recessed

ALWAYS USE

driver | 700mA | only 1x needed

	CHF	CODE
20W dim	62,80	90225604
28W DALI	92,50	90245704

more options and specs on page 900


LOXONE VERSIONS ONLINE

weverducre.com/more-ceno-recessed

back

WEVER & DUCRÉ

132 — 133



189



325



569

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°/350° M-31° L80|50K

wire springs 40-41 75 4-26

2700K | CRI >90 | 585lm

	CHF	CODE
	196,00	188161W3
	196,00	188161Q3
	196,00	188161B3

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
7W dim	46,25	90223301
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896



OPTIONAL


	CHF	CODE
honeycomb louver		
	20,05	915230B0



LOXONE VERSIONS ONLINE
weverducre.com/more-leca



DESIGN AWARD 2023
GOOD DESIGN
reddot winner 2023



1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

	CHF	CODE
	228,00	190851W_
	239,05	190851BL_
	239,05	190851Q_
	228,00	190851B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	555 >90	5

ALWAYS USE


quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
7W dim	46,25	90223301
14W DALI	89,05	90243502

revision opening required
more options and specs on page 896

MATCH

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 45-47 75 4-26

	CHF	CODE
	184,95	190151W_
	196,00	190151BL_
	196,00	190151Q_
	184,95	190151B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	555 >90	5

ALWAYS USE


quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
7W dim	46,25	90223301
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-match-recessed





THINKING MU STORE BARCELONA | ISERN SERRA BARCELONA | SPAIN






PRIVATE RESIDENCE | UNIQUE RENOVATIONS BELGIUM

 **DESIGN AWARD 2023**
 **reddot winner 2023**



MATCH

Ceiling recessed



2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 105x30 1.60 4-26

	CHF	CODE
	287,05	190251W
	303,60	190251Q
	287,05	190251B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x515 >90	3
3000K	2x545 >90	5

ALWAYS USE



quick connect driver | 700mA
only 1x needed


	CHF	CODE
14W dim	53,85	90225502
28W DALI	92,50	90245704

more options and specs on page 900



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-match-recessed





1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

	CHF	CODE
	219,45	190451W_
	230,50	190451L_
	230,50	190451M_
	230,50	190451Q_
	230,50	190451GM_
	219,45	190451B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	565 >90	5

ALWAYS USE

alu plasterkit 78-80 12,5,15,20,25

	CHF	CODE
	30,40	90017210



quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
7W dim	46,25	90223301
14W DALI*	89,05	90243502

more options and specs on page 896



LOXONE VERSIONS ONLINE
weverducre.com/more-match-sneak



MATCH SNEAK

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

	CHF	CODE
	205,65	190351W_
	216,70	190351L_
	216,70	190351M_
	216,70	190351Q_
	216,70	190351GM_
	205,65	190351B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	555 >90	5

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
6W	35,20	90213303
7W dim	46,25	90223301
14W DALI*	89,05	90243502

*revision opening required and
more options and specs on page 896





RADISSON RED | DESIGN AGENCY FYRA HELSINKI | FINLAND



RUVI

Ceiling recessed



1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium

IP20

54-56 90 7-33

	CHF	CODE
	121,45	1671E0B0

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

G95 10W | E27 | phase-cut dim
ceramic soft look

	CHF	CODE
2700K 1060lm	45,55	9003E163

G95 5.4W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 380lm	45,55	9003E111

splash

THEY'RE FUN TO BATHE WITH

IP44-Leuchten sind optimal vor Spritzwasser geschützt, IP65 sogar vor Wasserstrahlen – perfekt für Bad, Dusche oder SPA. Für wenig Platz eignen sich flache Modelle, die auch in niedrigen Räumen glänzen. Übrigens: Beide Schutzarten gibt es nicht nur als Spots, sondern in vielen weiteren Ausführungen.



Les luminaires IP44 sont parfaitement protégés contre les éclaboussures, les IP65 même contre les jets d'eau – idéals pour salles de bain, douches ou espaces bien-être. Les modèles plats conviennent aux petits espaces et plafonds bas. Les deux protections existent d'ailleurs en de nombreux formats, pas seulement en spots.



weverducre.com/ip44

PLANO IP44	p. 151
MATCH point IP44	p. 153
DEEP point IP44	p. 155
DEEP bijou IP65	p. 157
DEEP petit IP65	p. 159
DEEP IP65 IP44	p. 161
DEEPER IP44	p. 163
TAIO IP65	p. 165
RINI SNEAK IP44	p. 167
PERLEZ IP44	p. 169
MIRBI IP44	p. 171
CITY IP44	p. 173
PERLEZ IP44	p. 295

MIRBI IP44	p. 297
TAIO IP65	p. 299
ROB IP44	p. 301
ROBY IP44	p. 303
TOWNA IP44	p. 305
ROSS IP65	p. 307
HAJO IP44	p. 697
PERLEZ IP44	p. 701
PERLEZ CLIP IP44	p. 703
MIRBA IP44	p. 705
MIRBI LONG IP44	p. 707
RIBELLE IP65	p. 709
PAVIO IP65	p. 711

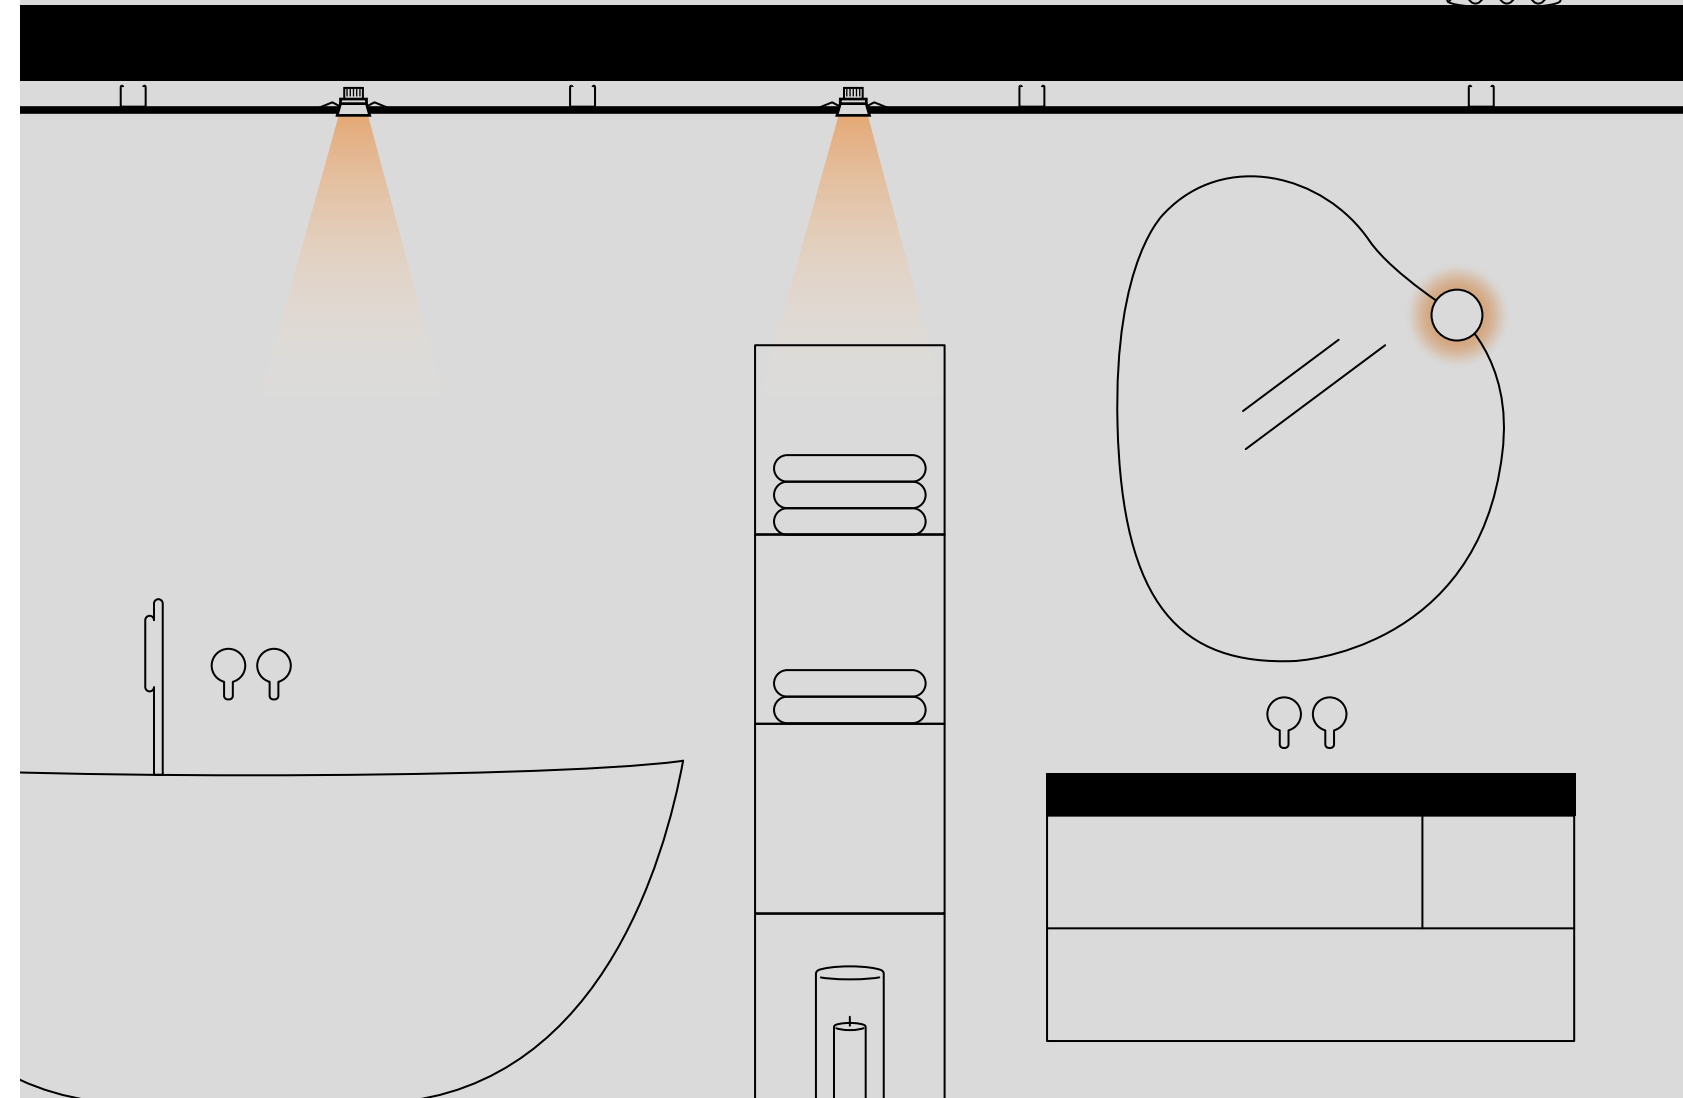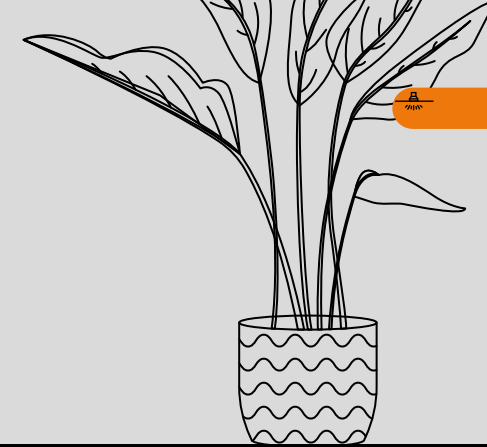




PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-plano-ip44

PLANO IP44

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80/55K

wire springs 76x78 90 4-30

	CHF	CODE
	157,35	118861W
	157,35	118861Q
	157,35	118861B

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	585/785	>90	3
3000K	615/830	>90	5
2000-3000K	430/635	>90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W IP20	35,20	90214406
10W dim IP20	51,75	90224403
15W DALI IP20	89,05	90244501

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 74x78 130 4-30

	CHF	CODE
	82,80	118420W0
	82,80	118420Q0
	82,80	118420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



RESTAURANT OSAR | STEENHUYSE INTERIEURARCHITECTEN TIELT | BELGIUM



MATCH point IP44

Ceiling recessed



193



329 | 347



415 | 509



571



589 | 685



723 | 729



1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	CHF	CODE
	89,70	191261W_
	89,70	191261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	295 >90	3
3000K	325 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim IP20	45,55	90226201
10W DALI IP20*	89,05	90246403

*revision opening required
more options and specs on page 895



LOXONE VERSIONS ONLINE
weverducre.com/more-match-point



PRIVATE RESIDENCE | VLADIMIR MITROVIĆ SERBIA



LOXONE VERSIONS ONLINE
weverducre.com/more-deep-point

DEEP point IP44

Ceiling recessed



1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 1.68 4-25

	CHF	CODE
	85,60	185161W_
	85,60	185161Q_
	85,60	185161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	355 >90	3
3000K	400 >90	5

ALWAYS USE

quick connect driver | 250mA

	CHF	CODE
5W dim IP20	45,55	90226201
10W DALI IP20*	89,05	90246403

*revision opening required
more options and specs on page 895





HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM



DEEP bijou IP65

Ceiling recessed



1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 M-30° 180/55K

wire springs 50-52 1.85 4-25

	CHF	CODE
	95,95	165361W_
	95,95	165361Q_
	95,95	165361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	495 >90	5

ALWAYS USE

driver | 500mA




	CHF	CODE
6W IP20	45,55	90214201
6.5W dim IP20*	35,20	90224301
7W IP67	64,20	90214301

*revision opening required
more drivers on page 898



MORE VERSIONS ONLINE
weverducre.com/more-deep-bijou-ip65





DEEP petit IP65

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium



743

IP65 M-31° L80|50K

wire springs 68-70 11.60 4-25

	CHF	CODE
	132,50	153761W_
	132,50	153761Q_
	132,50	153761B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	590 >90	3
3000K	615 >90	5

ALWAYS USE

driver | 350mA

	CHF	CODE
6W IP20	35,20	90213303
10W dim IP20*	49,00	90223406
17W IP68*	95,25	90213602

*revision opening required
more options and specs on page 896



LINK LAB CREATIVE OFFICES | STAY STUDIO KORTRIJK | BELGIUM




MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-deep-ip44-65



DEEP IP65 | IP44

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80|55K

wire springs 86-89 11.85 4-27

	CHF	CODE
	150,45	184161W_
	150,45	184161Q_
	150,45	184161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480/660 >90	3
3000K	510/695 >90	5

ALWAYS USE

driver | 500mA

	CHF	CODE
10W IP20	35,20	90214406
10W dim IP20	51,75	90224403
24W IP68	102,15	90214702

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 86-89 11.125 4-25

	CHF	CODE
	81,45	112620W0
	81,45	112620Q0
	81,45	112620B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5


more lamps and info on page 905



HOTEL NOBIS | WINGÅRDHS COPENHAGEN | DENMARK



LOXONE VERSIONS ONLINE
weverducre.com/more-deeper



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80/55K

wire springs 76-79 95 4-38

	CHF	CODE
	164,25	152461W_
	164,25	152461Q_
	164,25	152461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590/790	>90	3
3000K	620/835	>90	5
2000-3000K	440/650	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W IP20	35,20	90214406
10W dim IP20	51,75	90224403
15W DALI IP20	89,05	90244501

more options and specs on page 898

DEEPER IP44

Ceiling recessed



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 130 4-38

	CHF	CODE
	89,70	152220W0
	89,70	152220Q0
	89,70	152220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



PRIVATE RESIDENCE | JOLIYN GEERAERTS INTERIEURARCHITECT BELGIUM



TAIO IP65

Ceiling recessed



299



1.0

LED COB 6/9W | 350/500mA | 17V
aluminium | opal glass convex lens

IP65 W-105° L80/55K

wire springs 70 1.80 4-27

	CHF	CODE
	131,10	180781W_
	131,10	180781G_
	131,10	180781Q_
	131,10	180781B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	375/515	>90	3
3000K	390/535	>90	5

ALWAYS USE

driver | 500mA

	CHF	CODE
10W IP20	35,20	90214406
10W dim IP20	51,75	90224403
24W IP68	102,15	90214702

more options and specs on page 898






PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM




LOXONE VERSIONS ONLINE
weverducre.com/more-rini-sneak



RINI SNEAK IP44

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80/55K

wire springs 76-79 52 4-25

	CHF	CODE
	137,35	154461W_
	137,35	154461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605/815	>90	3
3000K	640/860	>90	5
2000-3000K	450/665	>90	9


LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	CHF	CODE
10W IP20	35,20	90214406
10W dim IP20	51,75	90224403
15W DALI IP20	89,05	90244501

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 85 4-25

	CHF	CODE
	62,80	154220W0
	62,80	154220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905




PERLEZ IP44

Ceiling recessed



271 | 275 | 295




1.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

⬠ ↑ IP44 L80|50K

wire springs ⌚ 46-51 ⚙ 68 ⚡ 4-25

	CHF	CODE
	204,25	192181W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	520/705 >95	3
3000K	550/740 >95	5




2.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

⬠ ↑ IP44 L80|50K

wire springs ⌚ 46-51 ⚙ 68 ⚡ 4-25

	CHF	CODE
	218,05	192281W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	600/810 >95	3
3000K	630/850 >95	5




3.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

⬠ ↑ IP44 L80|50K

wire springs ⌚ 46-51 ⚙ 68 ⚡ 4-25

	CHF	CODE
	245,65	192381W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	645/875 >95	3
3000K	665/915 >95	5



LOXONE VERSIONS ONLINE
weverducre.com/more-perlez-recessed

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
6W IP20	35,20	90213303
7W dim IP20	46,25	90223301
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896

ALWAYS USE

quick connect driver | 350mA

	CHF	CODE
6W IP20	35,20	90213303
7W dim IP20	46,25	90223301
14W DALI*	89,05	90243502


*revision opening required
more options and specs on page 896

ALWAYS USE


quick connect driver | 350mA

	CHF	CODE
6W IP20	35,20	90213303
7W dim IP20	46,25	90223301
14W DALI*	89,05	90243502

*revision opening required
more options and specs on page 896



back

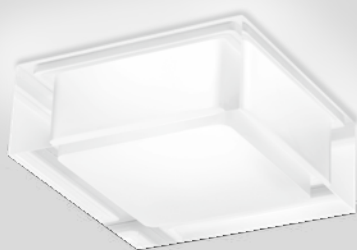

MIRBI IP44



Ceiling recessed



297



707



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 76-79 1.50 min. 8

3000K | CRI >90 | 640lm

CHF	CODE
213,90	175688W5

2.0


LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 72x72 1.50 min. 8

3000K | CRI >90 | 640lm



CHF	CODE
213,90	175788W5

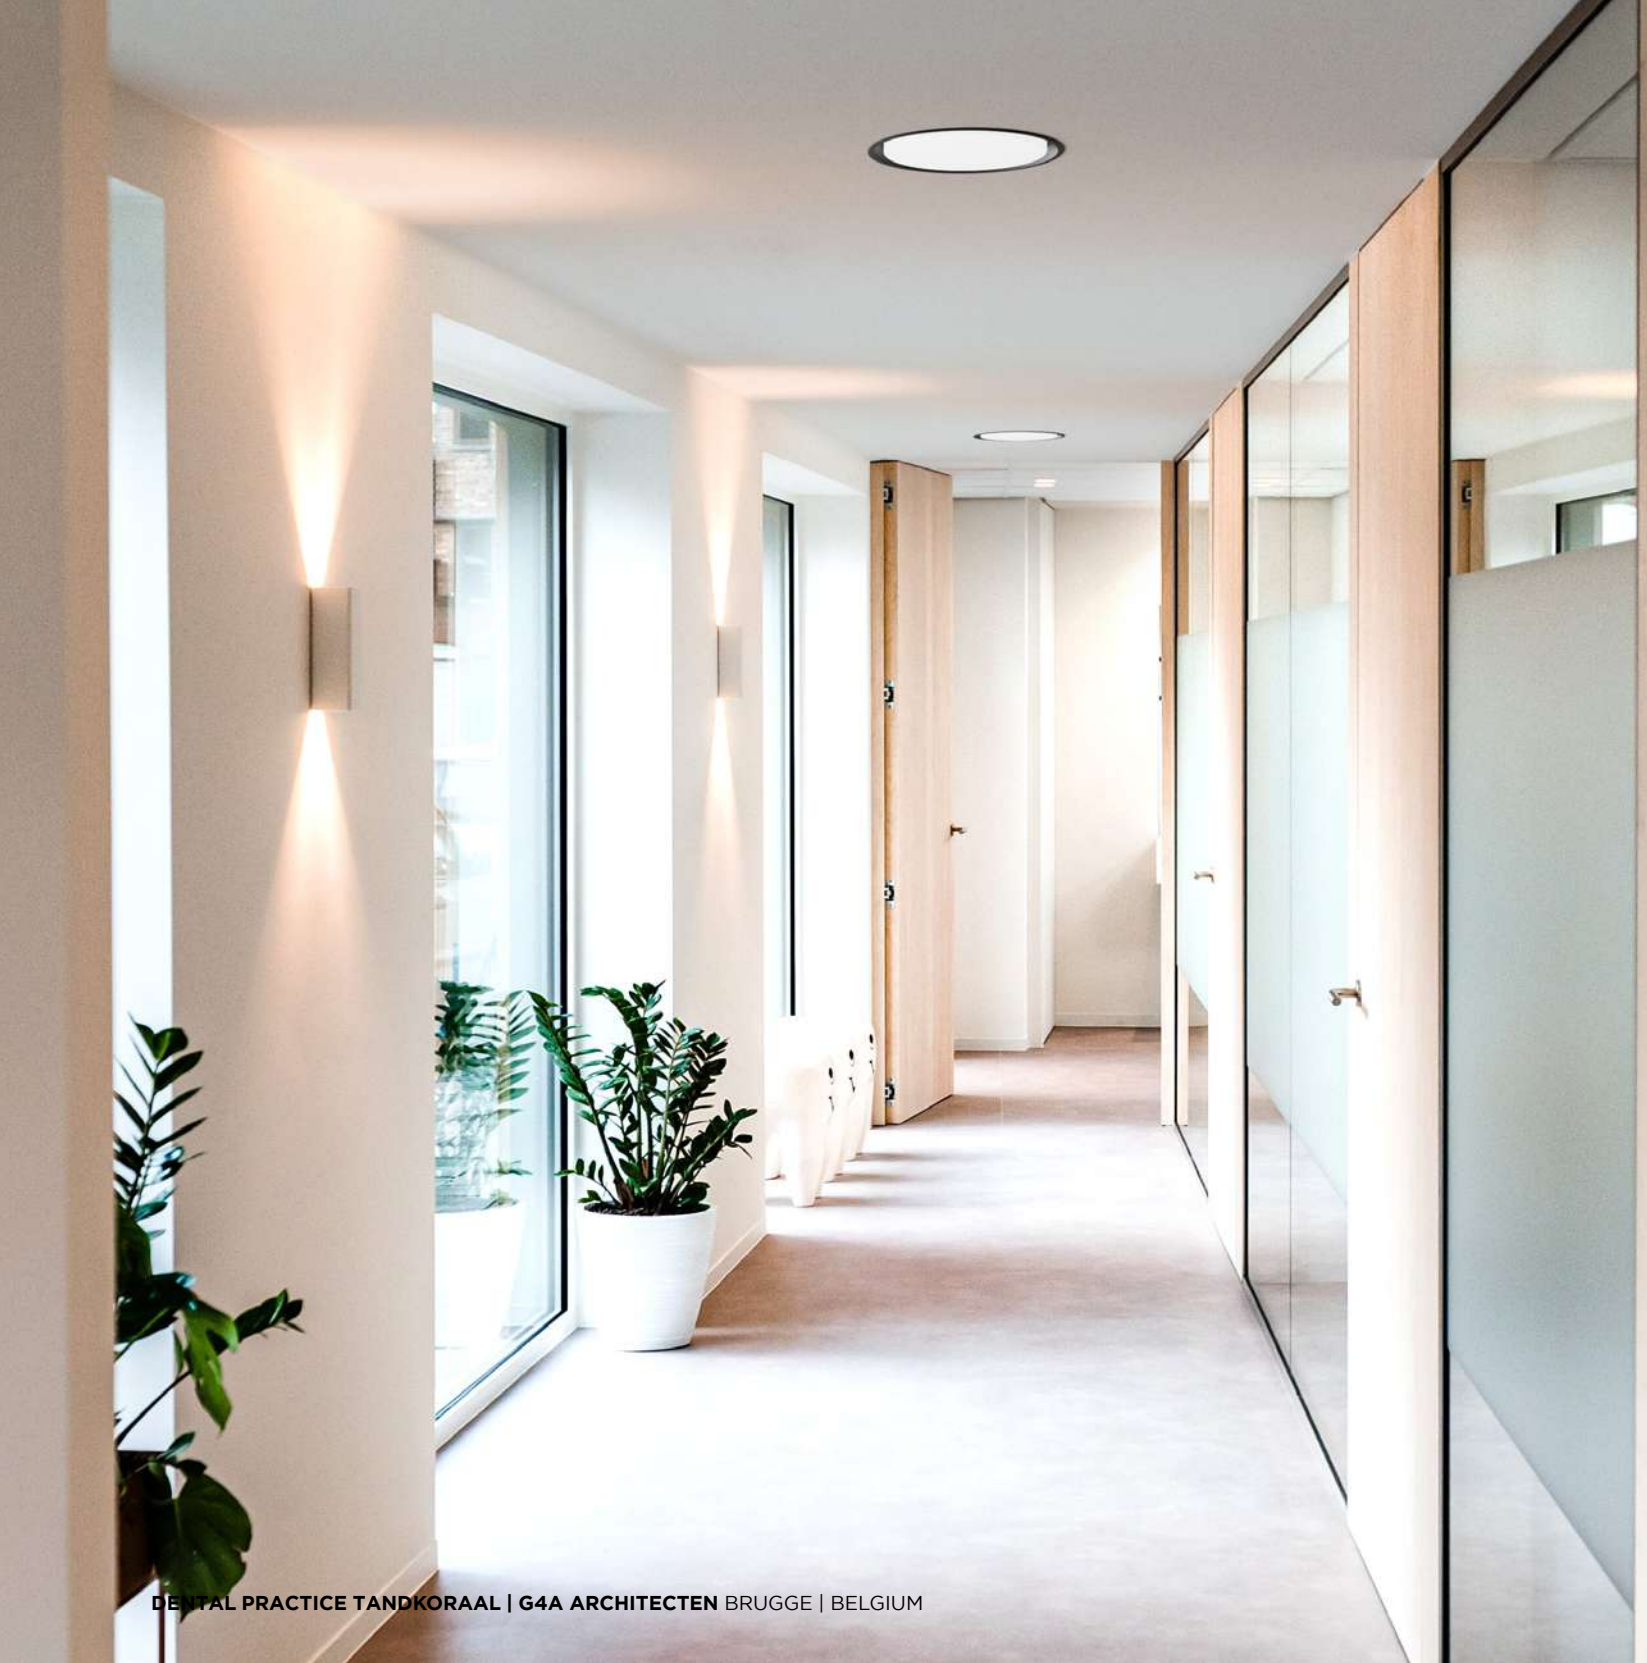

DENTAL PRACTICE TANDKORAAL | G4A ARCHITECTEN BRUGGE | BELGIUM

CITY IP44

Ceiling recessed



1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ ↑ IP44 L80/60K

wire springs Ⓢ 202-205 Ⓢ 50 Ⓢ 4-22

3000K | CRI >90 | 1170lm

	CHF	CODE
☐	229,10	115488W5
■	229,10	115488B5

2.6


LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ ↑ IP44 L80/60K

wire springs Ⓢ 297-300 Ⓢ 50 Ⓢ 4-22

3000K | CRI >90 | 1740lm

	CHF	CODE
☐	357,45	115588W5
■	357,45	115588B5





SPOT LIGHTS



QITO
177



BLIEK PETIT
179



CENO
181



LECA
189



MATCH
193



MATCH 4.0
197



MICK
199



PILLO
201



SARA ON BASE
203



SQUBE ON BASE
205

DOWN LIGHTS



LINOO
211



PIRRO PETIT
213



PIRRO
215



PIRRO OPAL
221



PIRRO ON BASE
223



PLANO PETIT
227



SIRRO
229



BOX MINI LED
231



BOX MINI PAR16
233



BOX
235



DOCUS MINI
239



DOCUS
241



HEXO MINI
243



HEXO
245



RAY MINI LED
247



RAY MINI PAR16
249



RAY
251



SOLID BIJOU
253



SOLID PETIT
255



SOLID
257



TRACE
261

LUMINAIRES



FINLIN
263



FIL SPIN
267




TRACE SPIN
269




PERLEZ SPIN
271



TRACE GRID
273



PERLEZ GRID
275



VENN
277



DRO
279



MIRRO
283



MIRRO SOFT
285



CLEA
287



J.J.W.
289



WIRO
291



ROOMOR OFFICE
293



IP-RATED



PERLEZ IP44
295



MIRBI IP44 1.0
297



MIRBI IP44 2.0
297



TAIO IP65
299



ROB IP44
301





ROBY IP44
303



TOWNA IP44
305



ROSS IP54
307




QITO

Ceiling surface



57



2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-35°|350° ⚡ M-31° L80|50K



OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

	CHF	CODE
	328,45	198664W_
	378,15	198664L_
	378,15	198664Q_
	328,45	198664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x420 >90	3
3000K	2x440 >90	5






BLIEK petit

Ceiling surface



63



2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-60°|355° ⚡ M-31° L70|55K



OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

	CHF	CODE
	383,65	164664W_
	383,65	164664CH_
	383,65	164664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x490 >90	3
3000K	2x510 >90	5
2000-3000K	2x340 >90	9





PRIVATE RESIDENCE | VERFAILLIE INTERIEUR BELGIUM



LOXONE VERSIONS ONLINE
weverducre.com/more-ceno-surface



OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ∠ M-31° L70|55K

	CHF	CODE
	231,85	176664W_
	231,85	176664Q_
	231,85	176664K_
	231,85	176664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	520 >90	3
3000K	540 >90	5

CENO
Ceiling surface




131



321



585



2.0



LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ∠ M-31° L70|55K

	CHF	CODE
	371,25	176764W_
	371,25	176764Q_
	371,25	176764K_
	371,25	176764B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x525 >90	5






4.0

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-31° L70|55K



OPTIONAL

honeycomb louver		
	CHF	CODE
	20,05	915230B0

	CHF	CODE
	604,45	176864W_
	604,45	176864Q_
	604,45	176864K_
	604,45	176864B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x510 >90	3
3000K	4x530 >90	5

4.1

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium





⊕ IP20 0°-90°|350° ⚡ M-31° L70|55K

	CHF	CODE
	572,70	176964W_
	572,70	176964Q_
	572,70	176964K_
	572,70	176964B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x510 >90	3
3000K	4x530 >90	5

CENO


Ceiling surface






CENO

Ceiling surface




131



321




585



6.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°/350° A-M-31° L70/55K



OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

	CHF	CODE
	793,50	176064W_
	793,50	176064Q_
	793,50	176064B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x480 >90	3
3000K	6x525 >90	5



LECA

Ceiling surface







135



325



569



honeycomb

OPTIONAL

honeycomb louver

	CHF	CODE
	247,05	188264W3
	247,05	188264Q3
	247,05	188264B3

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° $\hat{A}$ M-31° L80|50K

2700K | CRI >90 | 585lm

	CHF	CODE
	247,05	188264W3
	247,05	188264Q3
	247,05	188264B3

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° $\hat{A}$ M-31° L80|50K

2700K | CRI >90 | 2x585lm

	CHF	CODE
	398,85	188364W3
	398,85	188364Q3
	398,85	188364B3

4.0

LED COB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° $\hat{A}$ M-31° L80|50K

2700K | CRI >90 | 4x585lm

	CHF	CODE
	641,70	188464W3
	641,70	188464B3





back





PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

 **DESIGN AWARD 2023**  **reddot winner 2023**

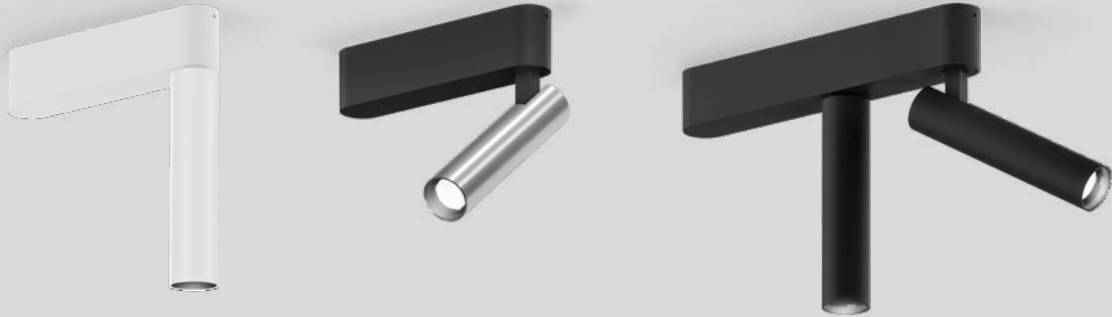

1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-30° L80|50K

	CHF	CODE
	241,50	177154W_
	247,05	177154BL_
	241,50	177154B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	550 >90	3
3000K	580 >90	5

MATCH

Ceiling surface 61 | 137 | 153



329 | 347



415 | 509



571



589 | 685



723 | 729

2.0

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-30° L80|50K

	CHF	CODE
	393,30	177254W_
	407,10	177254BL_
	393,30	177254B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x545 >90	3
3000K	2x550 >90	5



LOXONE VERSIONS ONLINE
weverducre.com/more-match-surface



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN






DESIGN
AWARD
2023



reddot winner 2023

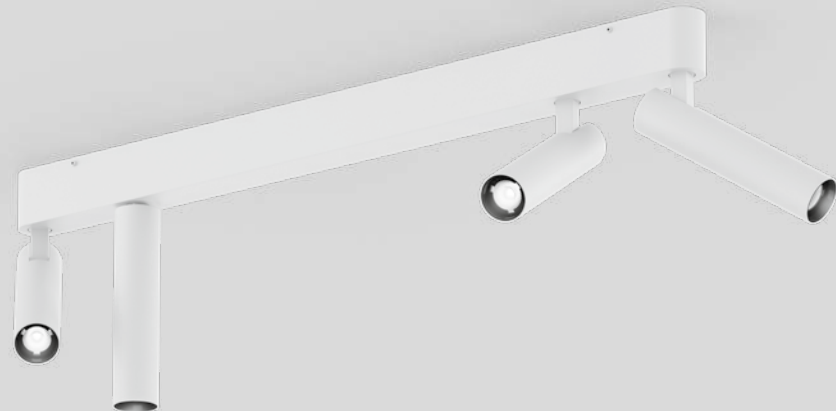

MATCH

Ceiling surface 61 | 137 | 153



329 | 347



415 | 509




571



589 | 685



723 | 729



4.0

LED COB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-30° L80|50K

	CHF	CODE
	627,90	177454W_
	627,90	177454B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x490 >90	3
3000K	4x495 >90	5



back



PRIVATE RESIDENCE | AXIOME ARCHITECTURE BELGIUM




1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-23° L80|50K

	CHF	CODE
	365,70	159144J_
	365,70	159144K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	410 >90	3
3000K	435 >90	5



2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-23° L80|50K

	CHF	CODE
	476,10	159244J_
	476,10	159244K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x215 >90	3
3000K	2x225 >90	5

MICK

Ceiling surface



333



687 | 691





PILLO

Ceiling surface



363



1.0

PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90°|350°

	CHF	CODE
■	89,70	194120W0
■	89,70	194120B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim			
	CHF	CODE	
■ 2700K 225lm	20,05	901128B3	
■ 3000K 235lm	20,05	901128B5	

2.0


2x PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90°|350°

	CHF	CODE
■	162,85	194220W0
■	162,85	194220B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim			
	CHF	CODE	
■ 2700K 225lm	20,05	901128B3	
■ 3000K 235lm	20,05	901128B5	



PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



	CHF	CODE
	109,05	157220W0
	117,30	157220G0
	117,30	157220K0
	109,05	157220B0

PAR16 6.1W | GU10 | phase-cut dim

		CHF	CODE
2700K	445lm	22,80	901228W3
2700K	440lm	22,80	901228B3
3000K	465lm	22,80	901228W5
3000K	460lm	22,80	901228B5

more lamps and info on page 905

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



	CHF	CODE
	168,40	157420W0
	168,40	157420B0

PAR16 6.1W | GU10 | phase-cut dim

		CHF	CODE
2700K	445lm	22,80	901228W3
2700K	440lm	22,80	901228B3
3000K	465lm	22,80	901228W5
3000K	460lm	22,80	901228B5

more lamps and info on page 905

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



	CHF	CODE
	338,10	157520W0
	338,10	157520B0

PAR16 6.1W | GU10 | phase-cut dim

		CHF	CODE
2700K	445lm	22,80	901228W3
2700K	440lm	22,80	901228B3
3000K	465lm	22,80	901228W5
3000K	460lm	22,80	901228B5

more lamps and info on page 905



365



689






PRIVATE RESIDENCE | AGENCE VERONIQUE COTREL FRANCE

SQUBE on base

Ceiling surface



1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90° $\curvearrowright$ M-39° L70|55K

	CHF	CODE
	227,70	144268W_
	227,70	144268B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	445 >90	5
1800-3000K	350 >80	9



black ring
LED



PAR16




1.1 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90° $\curvearrowright$ M-32° L70|55K

	CHF	CODE
	260,85	144468W_
	260,85	144468B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	925 >90	3
3000K	960 >90	5
1800-3000K	645 >80	9



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90°

	CHF	CODE
	132,50	144220W0
	132,50	144220B0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



PRIVATE RESIDENCE | CBA & MAX BAUER - CBA.LU - BAUERGROUP.LU LUXEMBOURG





WEVER & DUCRÉ 206 — 207



PRIVATE RESIDENCE | LANCO DESIGN BELGIUM

SQUBE on base

Ceiling surface



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

	CHF	CODE
White	269,10	144520W0
Black	269,10	144520B0

OPTIONAL

		CHF	CODE
White	2700K 445lm	22,80	901228W3
Black	2700K 440lm	22,80	901228B3
White	3000K 465lm	22,80	901228W5
Black	3000K 460lm	22,80	901228B5

more lamps and info on page 905

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

	CHF	CODE
White	324,30	144620W0
Black	324,30	144620B0

OPTIONAL

		CHF	CODE
White	2700K 445lm	22,80	901228W3
Black	2700K 440lm	22,80	901228B3
White	3000K 465lm	22,80	901228W5
Black	3000K 460lm	22,80	901228B5

more lamps and info on page 905







LINOO

Ceiling surface



71

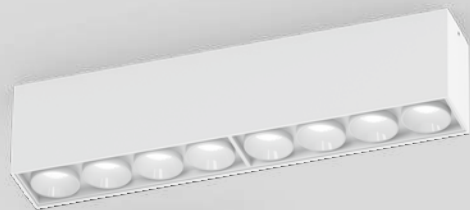

4.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

⊕ IP20  M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

	CHF	CODE
	204,25	109664WW9
	204,25	109664WB9
	204,25	109664QB9
	204,25	109664BB9

4.1

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

⊕ IP20  M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

	CHF	CODE
	193,20	109764WW9
	193,20	109764WB9
	193,20	109764QB9
	193,20	109764BB9



8.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch



⊕ IP20  M-39° L80|50K

2700K/3000K | CRI >90 | 8x125lm

	CHF	CODE
	324,30	109864WW9
	324,30	109864WB9
	324,30	109864QB9
	324,30	109864BB9



back

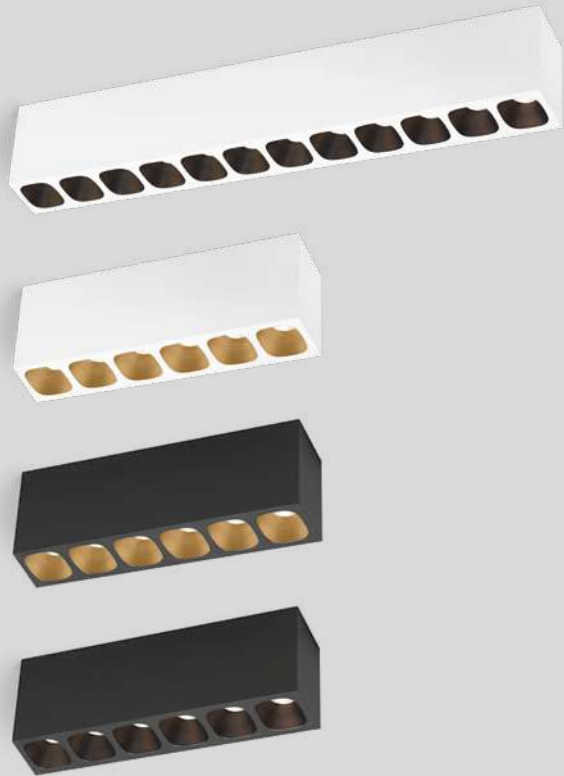

6.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-28° L80|50K

	CHF	CODE
	351,90	129854E_
	351,90	129854WM_
	351,90	129854CH_
	351,90	129854B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x160 >90	3
3000K	6x165 >90	5

PIRRO petit

Ceiling surface



75



12.0

LED COB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-28° L80|50K



	CHF	CODE
	517,50	129954E_
	517,50	129954WM_
	517,50	129954CH_
	517,50	129954B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	12x160 >90	3
3000K	12x165 >90	5



PIRRO

Ceiling surface



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 $\bar{A}$ -M-32° L70|55K



OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

4.1

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


⊕ IP20 $\bar{A}$ -M-32° L70|55K

	CHF	CODE
	204,25	151164E_
	204,25	151164J_
	204,25	151164K_
	204,25	151164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	355 >90	3
3000K	385 >90	5

	CHF	CODE
	328,45	151564E_
	328,45	151564J_
	328,45	151564K_
	328,45	151564B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x365 >90	3
3000K	4x380 >90	5



back



PRIVATE RESIDENCE | PADRON LUXURY LIVING BY POTRELL BELGIUM

PIRRO





Ceiling surface



75



371

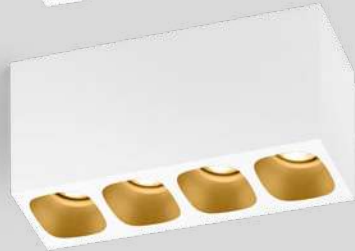

2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

6.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium



honeycomb

OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

⊕ IP20 $\hat{A}$ -M-32° L70|55K

	CHF	CODE
	251,20	151264E_
	251,20	151264J_
	251,20	151264K_
	251,20	151264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x355 >90	3
3000K	2x385 >90	5

⊕ IP20 $\hat{A}$ -M-32° L70|55K

	CHF	CODE
	334,00	151464E_
	334,00	151464J_
	334,00	151464K_
	334,00	151464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x365 >90	3
3000K	4x380 >90	5

⊕ IP20 $\hat{A}$ -M-32° L70|55K

	CHF	CODE
	476,10	151664E_
	476,10	151664J_
	476,10	151664K_
	476,10	151664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x330 >90	3
3000K	6x350 >90	5



back





PRIVATE RESIDENCE | ATELIER KJ KOREA





PRIVATE RESIDENCE | ORANEN & TURKLIN FINLAND

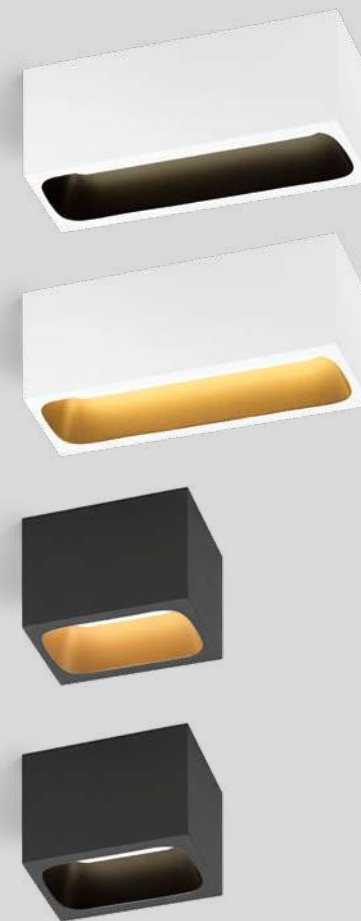


PIRRO OPAL

Ceiling surface



371




2.0

LED PCB7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

⊕ IP20 L80/60K

	CHF	CODE
	251,20	151284E_
	251,20	151284J_
	251,20	151284K_
	251,20	151284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	270 >90	3
3000K	280 >90	5




4.0

LED PCB12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

⊕ IP20 L80/60K

	CHF	CODE
	334,00	151484E_
	334,00	151484J_
	334,00	151484K_
	334,00	151484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	685 >90	3
3000K	710 >90	5







back



PIRRO on base

Ceiling surface



OPTIONAL

honeycomb louver		
	CHF	CODE
	20,05	915230B0

2.2

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

⊕ IP20 ⚡ M-32° L70|55K

	CHF	CODE
	685,90	173564WWB_
	685,90	173564WWG_
	685,90	173564BBG_
	685,90	173564BBB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5

4.2

LED COB 31W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

⊕ IP20 ⚡ M-32° L70|55K

	CHF	CODE
	768,70	173664WWB_
	768,70	173664WWG_
	768,70	173664BBG_
	768,70	173664BBB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x360 >90	3
3000K	6x380 >90	5

4.4

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

⊕ IP20 ⚡ M-32° L70|55K

	CHF	CODE
	851,50	173764WWB_
	851,50	173764WWG_
	851,50	173764BBG_
	851,50	173764BBB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	8x360 >90	3
3000K	8x380 >90	5






PRIVATE RESIDENCE | HUIS CREEMERS BELGIUM



PIRRO on base

Ceiling surface




2.4.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

⊕ IP20 $\hat{A}$ M-32° L70|55K

CHF		CODE	
		1065,40	173864WWB_
		1065,40	173864WWG_
		1065,40	173864BBG_
		1065,40	173864BBB_



OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

4.2.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

⊕ IP20 $\hat{A}$ M-32° L70|55K

CHF		CODE	
		1065,40	173964WWB_
		1065,40	173964WWG_
		1065,40	173964BBG_
		1065,40	173964BBB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	8x360 >90	3
3000K	8x380 >90	5








MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-plano-surface

PLANO petit

Ceiling surface



83

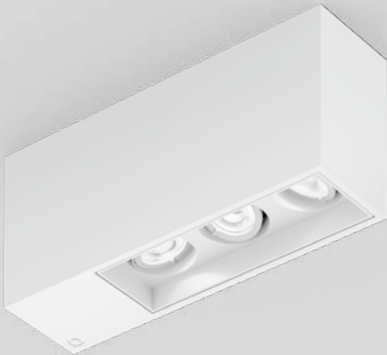

1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-25°|355° ⚡ M-31° L70|55K

	CHF	CODE
	231,85	162864WW_
	231,85	162864WB_
	231,85	162864BM_
	231,85	162864BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5

LED module 20 years replaceability

2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-25°|355° ⚡ M-31° L70|55K

	CHF	CODE
	351,90	162964WW_
	351,90	162964WB_
	351,90	162964BM_
	351,90	162964BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>90	3
3000K	2x580	>90	5

LED module 20 years replaceability

3.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-25°|355° ⚡ M-31° L70|55K

	CHF	CODE
	448,50	162764WW_
	448,50	162764WB_
	448,50	162764BM_
	448,50	162764BB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5

LED module 20 years replaceability






back



SIRRO

Ceiling surface



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CHF	CODE
	241,50	139120W0
	241,50	139120E0
	241,50	139120B0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CHF	CODE
	356,05	139220W0
	356,05	139220E0
	356,05	139220B0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	CHF	CODE
	466,45	139320W0
	466,45	139320E0
	466,45	139320B0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905




LOXONE VERSIONS ONLINE
weverducre.com/more-sirro



PRIVATE RESIDENCE | JACO GOUDRIAAN THE NETHERLANDS



LOXONE VERSIONS ONLINE
weverducre.com/more-box-mini

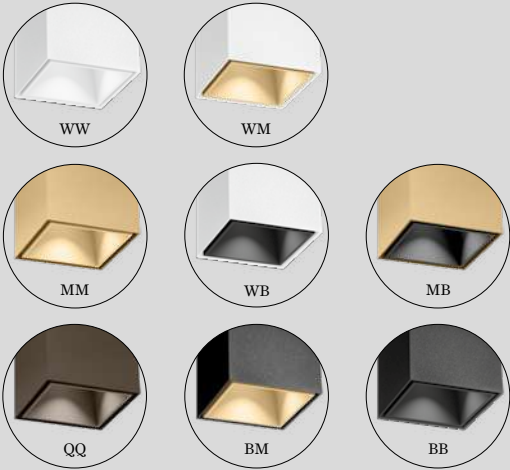


back

BOX mini

Ceiling surface



605



1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

⊕ IP20 ⚡ M-30° L80|55K



	CHF	CODE
	135,25	258154WW_
	135,25	258154WM_
	135,25	258154WB_
	136,65	258154MM_
	136,65	258154MB_
	135,25	258154BM_
	136,65	258154QQ_
	135,25	258154BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5



BOX mini

Ceiling surface



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



OPTIONAL

inner reflector max. 10W
polycarbonate


	CHF	CODE
	13,15	900199W1
	13,15	900199G1
	13,15	900199M1
	13,15	900199Q1
	13,15	900199B1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5



more lamps and info on page 905



back



OFFICE INNARGI COPENHAGEN | HELLE FLOU COPENHAGEN | DENMARK



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⚡ M-Z1° L70|50K



OPTIONAL

inner reflector max. 10W
polycarbonate

	CHF	CODE
	29,00	911211W1
	29,00	911211G1
	29,00	911211M1
	29,00	911211B1

inner cover max. 10W
aluminium

	CHF	CODE
	31,75	911011W1
	31,75	911011G1
	31,75	911011M1
	31,75	911011B1

phase-cut dim

	CHF	CODE
	241,50	186158W_
	242,90	186158L_
	242,90	186158G_
	242,90	186158M_
	242,90	186158Q_
	241,50	186158B_

DALI

	CHF	CODE
	273,25	186159W_
	274,65	186159L_
	274,65	186159G_
	274,65	186159M_
	274,65	186159Q_
	273,25	186159B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >90	3
3000K	620 >90	5
2000-3000K*	415 >90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20

	CHF	CODE
	93,85	146120W0
	95,25	146120L0
	95,25	146120G0
	95,25	146120M0
	95,25	146120Q0
	93,85	146120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905

BOX

Ceiling surface



335



607






765



815



PRIVATE RESIDENCE | DECOFORM BELGIUM

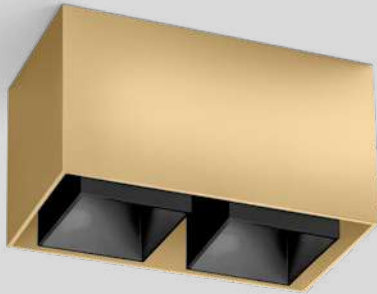


2.0 LED

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium



reflector



cover

OPTIONAL

double inner reflector max. 10W
polycarbonate

	CHF	CODE
	37,30	911251W1
	37,30	911251G1
	37,30	911251M1
	37,30	911251B1

inner cover max. 10W
aluminium | 2 pieces needed

	CHF	CODE
	31,75	911011W1
	31,75	911011G1
	31,75	911011M1
	31,75	911011B1

	CHF	CODE
	383,65	186258W_
	387,80	186258L_
	387,80	186258G_
	387,80	186258M_
	387,80	186258Q_
	383,65	186258B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x600 >90	3
3000K	2x620 >90	5
2000-3000K	2x415 >90	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 ⚡ M-21° L70|50K

	CHF	CODE
	186,30	146220W0
	190,45	146220L0
	190,45	146220G0
	190,45	146220M0
	190,45	146220Q0
	186,30	146220B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM




DOCUS mini

Ceiling surface



609



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



	CHF	CODE
	88,35	258320W0
	89,70	258320G0
	88,35	258320B0



OPTIONAL

inner reflector max. 10W
polycarbonate

	CHF	CODE
	13,15	900199W2
	13,15	900199G2
	13,15	900199B2

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
 2700K 445lm	22,80	901228W3
 2700K 440lm	22,80	901228B3
 3000K 465lm	22,80	901228W5
 3000K 460lm	22,80	901228B5

more lamps and info on page 905



back



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⚡ M-21° L70|50K

phase-cut dim

	CHF	CODE
	248,40	186358W_
	249,80	186358G_
	248,40	186358B_

DALI

	CHF	CODE
	280,15	186359W_
	281,55	186359G_
	280,15	186359B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	630 >90	5
2000-3000K*	420 >90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20

phase-cut dim

	CHF	CODE
	100,75	146320W0
	102,15	146320G0
	100,75	146320B0

DALI

	CHF	CODE
	280,15	186359W_
	281,55	186359G_
	280,15	186359B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	445lm	22,80 901228W3
2700K	440lm	22,80 901228B3
3000K	465lm	22,80 901228W5
3000K	460lm	22,80 901228B5

more lamps and info on page 905

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20

phase-cut dim

	CHF	CODE
	191,85	146420W0
	197,35	146420G0
	191,85	146420B0

DALI

	CHF	CODE
	280,15	186359W_
	281,55	186359G_
	280,15	186359B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	445lm	22,80 901228W3
2700K	440lm	22,80 901228B3
3000K	465lm	22,80 901228W5
3000K	460lm	22,80 901228B5

more lamps and info on page 905

OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed

	CHF	CODE
	31,75	911021W1
	31,75	911021G1
	31,75	911021B1

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905



PRIVATE RESIDENCE | TOM BEIGE / *NESS HUNGARY



HEXO mini

Ceiling surface



375 | 391



505 | 531



611



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



IP20



OPTIONAL

inner reflector max. 10W
polycarbonate


	CHF	CODE
	13,15	900199W3
	13,15	900199G3
	13,15	900199Q3
	13,15	900199B3

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
 2700K 445lm	22,80	901228W3
 2700K 440lm	22,80	901228B3
 3000K 465lm	22,80	901228W5
 3000K 460lm	22,80	901228B5

more lamps and info on page 905






back



HEXO

Ceiling surface



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⚡ M-21° L70|50K

phase-cut dim

	CHF	CODE
	248,40	186558W_
	249,80	186558G_
	249,80	186558Q_
	249,80	186558P_
	248,40	186558B_

DALI

	CHF	CODE
	280,15	186559W_
	281,55	186559G_
	281,55	186559Q_
	281,55	186559P_
	280,15	186559B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	670 >90	3
3000K	700 >90	5
2000-3000K*	470 >90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

🔊 ⊕ IP20

	CHF	CODE
	100,75	146520W0
	102,15	146520G0
	102,15	146520Q0
	102,15	146520P0
	100,75	146520B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

🔊 ⊕ IP20


	CHF	CODE
	191,85	146620W0
	197,35	146620G0
	197,35	146620Q0
	197,35	146620P0
	191,85	146620B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed



	CHF	CODE
	31,75	911031W1
	31,75	911031G1
	31,75	911031B1



PRIVATE RESIDENCE | SYNOPSIS ARCHITECTURE BELGIUM



LOXONE VERSIONS ONLINE
weverducre.com/more-ray-mini

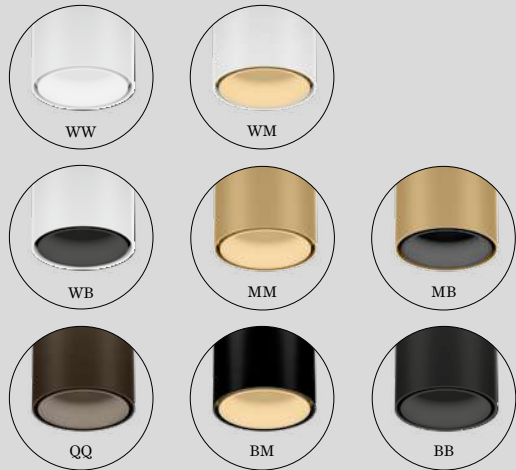

RAY mini

Ceiling surface



1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

⊕ IP20 ⚡ M-30° L80|55K


	CHF	CODE
	135,25	258254WW_
	135,25	258254WM_
	135,25	258254WB_
	136,65	258254MM_
	136,65	258254MB_
	135,25	258254BM_
	136,65	258254QQ_
	135,25	258254BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	480 >90	5




RAY mini

Ceiling surface



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



OPTIONAL

inner reflector max. 10W
polycarbonate

	CHF	CODE
	13,15	900199W4
	13,15	900199G4
	13,15	900199M4
	13,15	900199Q4
	13,15	900199B4

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
 2700K 445lm	22,80	901228W3
 2700K 440lm	22,80	901228B3
 3000K 465lm	22,80	901228W5
 3000K 460lm	22,80	901228B5

more lamps and info on page 905



PRIVATE RESIDENCE | AGENCE VERONIQUE COTRE | FRANCE



LOXONE VERSIONS ONLINE
weverducre.com/more-solid-bijou

SOLID bijou

Ceiling surface



1.0

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⚡ M-27° L80|50K

	CHF	CODE
	186,30	133864WW_
	186,30	133864WG_
	188,40	133864MB_
	186,30	133864BG_
	186,30	133864BM_
	188,40	133864QQ_
	186,30	133864BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5


back



PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR THE NETHERLANDS



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-solid-petit



2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


⊕ IP20 0°-25°|355° ⚡ M-31° L80|50K



	CHF	CODE
	237,40	133964WW_
	237,40	133964WG_
	240,15	133964MB_
	237,40	133964BG_
	237,40	133964BM_
	237,40	133964SG_
	237,40	133964ME_
	240,15	133964QQ_
	237,40	133964BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	555 >90	3
3000K	585 >90	5
2000-3000K	470 >90	9

LED module 20 years replaceability





PRIVATE RESIDENCE | STUDIO ZUYD THE NETHERLANDS



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-solid



1.0 LED

LED COB 13W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-25°|355° ⚡ M-34° L80|55K

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

🔊 □ IP20 0°-25°|355°

phase-cut dim

	CHF	CODE
WW	255,30	133764WW_
WG	255,30	133764WG_
MB	259,45	133764MB_
BG	255,30	133764BG_
BM	255,30	133764BM_
QQ	259,45	133764QQ_
BB	255,30	133764BB_

DALI-2 | push dim

	CHF	CODE
WW	298,10	133765WW_
WG	298,10	133765WG_
MB	302,25	133765MB_
BG	298,10	133765BG_
BM	298,10	133765BM_
QQ	302,25	133765QQ_
BB	298,10	133765BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	855 >90	3
3000K	905 >90	5
2000-3000K	695 >90	9

LED module 20 years replaceability

	CHF	CODE
WW	160,10	133120WW0
WG	160,10	133120WG0
MB	164,25	133120MB0
BG	160,10	133120BG0
BM	160,10	133120BM0
QQ	164,25	133120QQ0
BB	160,10	133120BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905





PRIVATE RESIDENCE | STUDIO FOOLEN THE NETHERLANDS



TRACE

Ceiling surface




351



511 | 547



593



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⚡ M-27° L80|50K

	CHF	CODE
	213,90	183164W_
	216,70	183164BL_
	216,70	183164CH_
	213,90	183164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5





PRIVATE RESIDENCE GREECE


   winner 2023



OPTIONAL

cover plate adapter for concrete housing

	CHF	CODE
	17,25	900194B0




1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CHF	CODE
	365,70	174184W_
	365,70	174184CH_
	365,70	174184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	485 >90	5




2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CHF	CODE
	379,50	174284W_
	379,50	174284CH_
	379,50	174284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	675 >90	3
3000K	730 >90	5



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CHF	CODE
	427,80	174384W_
	427,80	174384CH_
	427,80	174384B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	900 >90	3
3000K	975 >90	5

FINLIN

Ceiling surface



433



673 | 679



727



PRIVATE RESIDENCE | CRISTINA PUERTA ESTUDIO SPAIN






reddot winner 2024

FIL SPIN


Ceiling surface

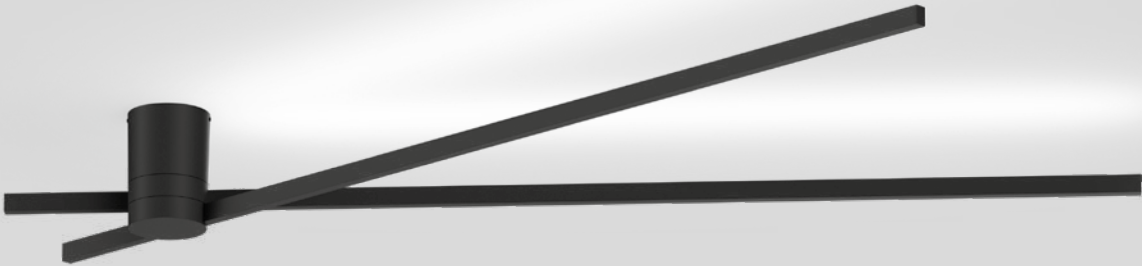

441



681



1.0


LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

⊕ IP20 180° L80/100K

2700K CRI >90 2x905lm		
	CHF	CODE
	586,50	254584B3



back

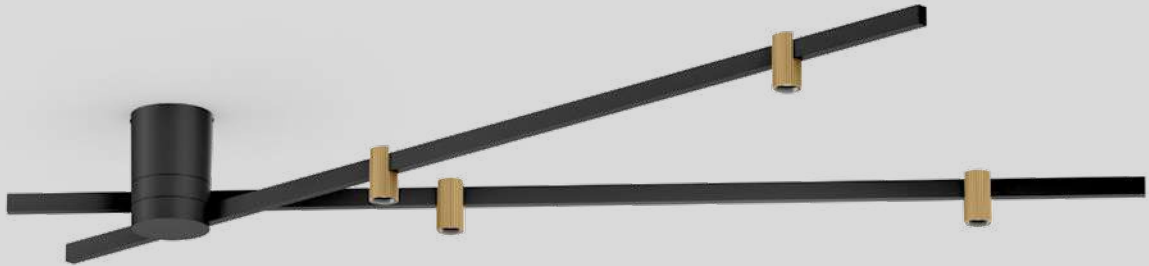

TRACE SPIN

Ceiling surface




351



511 | 547



593



1.0


LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 180° ∠ M-30° L80|50K

2700K | CRI >90 | 4x360lm

CHF		CODE
	586,50	183264CH3
	586,50	183264B3



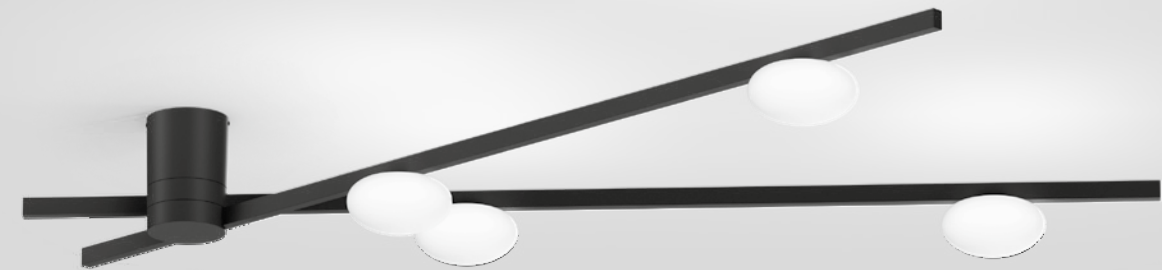

PERLEZ SPIN


Ceiling surface



169



701

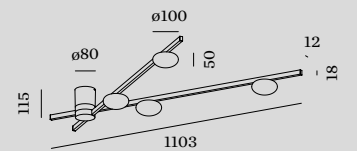


1.0

LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

⊕ IP20 180° L80|50K

2700K | CRI >90 | 4x250lm

CHF	CODE
724.50	192784BW3



back

WEVER & DUCRÉ 270 – 271



PRIVATE RESIDENCE | KWADRAAT BELGIUM

TRACE GRID

Ceiling surface

351

511 | 547

593

1.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
direct light

IP20

M-30°

L80|50K

2700K | CRI >90 | 8x415lm

	CHF	CODE
	959,10	183364CH3
	959,10	183364B3

2.0

LED PCB/COB 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
dir./indir. light

IP20

M-30°


L80|50K

2700K | CRI >90 | 4x415/2x480lm

	CHF	CODE
	890,10	183464CH3
	890,10	183464B3

back

WEVER & DUCRÉ 272 — 273

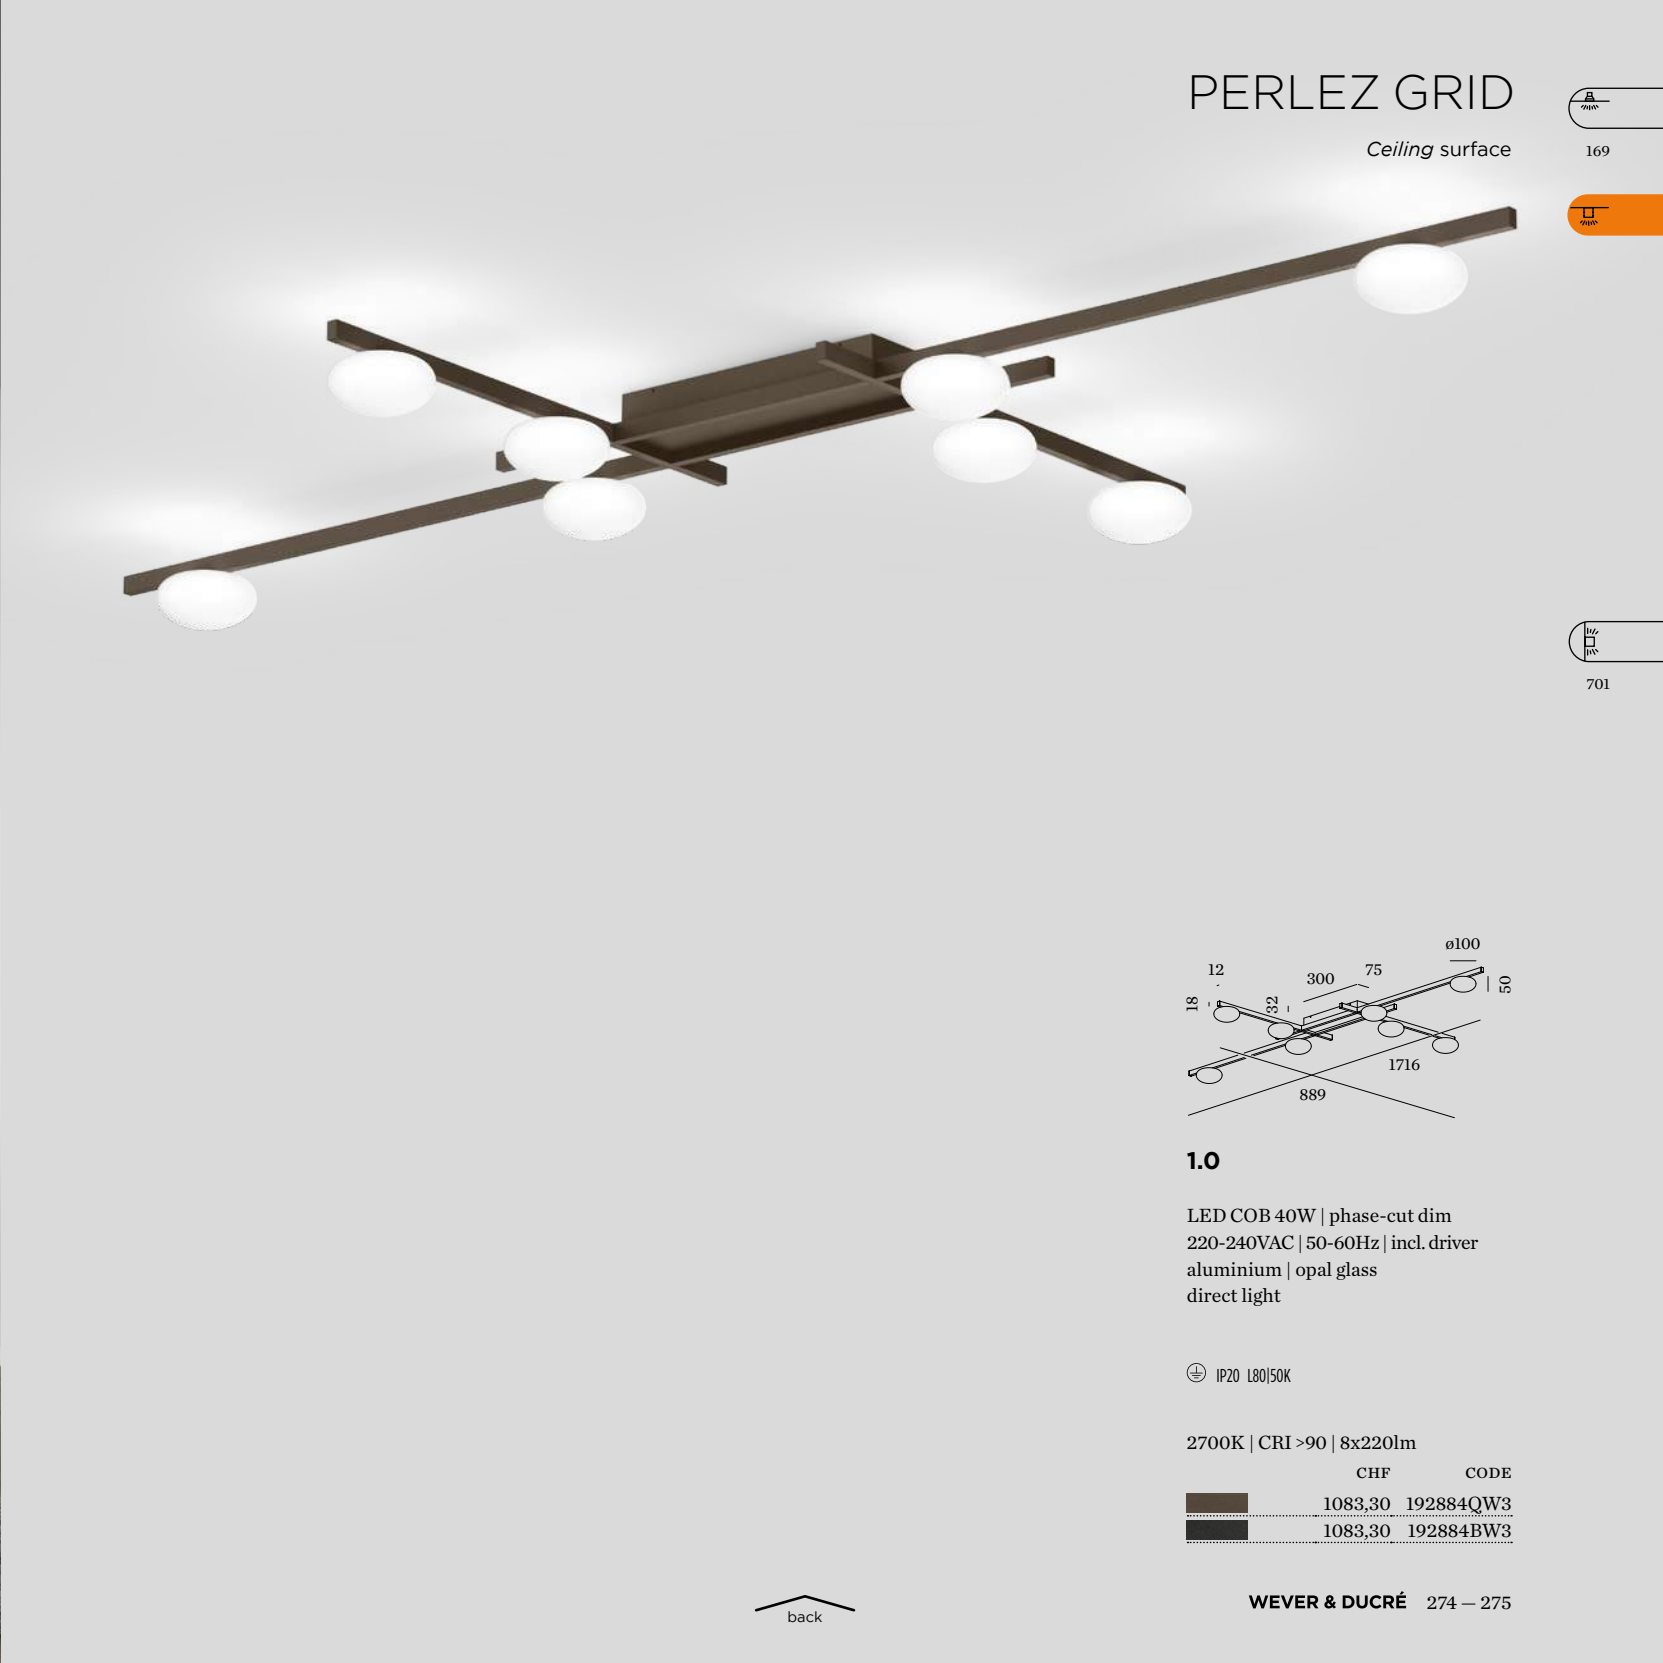

PERLEZ GRID


Ceiling surface



169



701

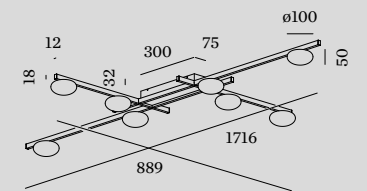


1.0

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
direct light

⊕ IP20 L80/50K

2700K | CRI >90 | 8x220lm

	CHF	CODE
	1083,30	192884QW3
	1083,30	192884BW3



back




OFFICE RPD | VIVA ARCHITECTURE ANTWERP | BELGIUM





CREATE YOUR OWN VENN
weverducre.com/venn-configurator

VENN

Ceiling surface

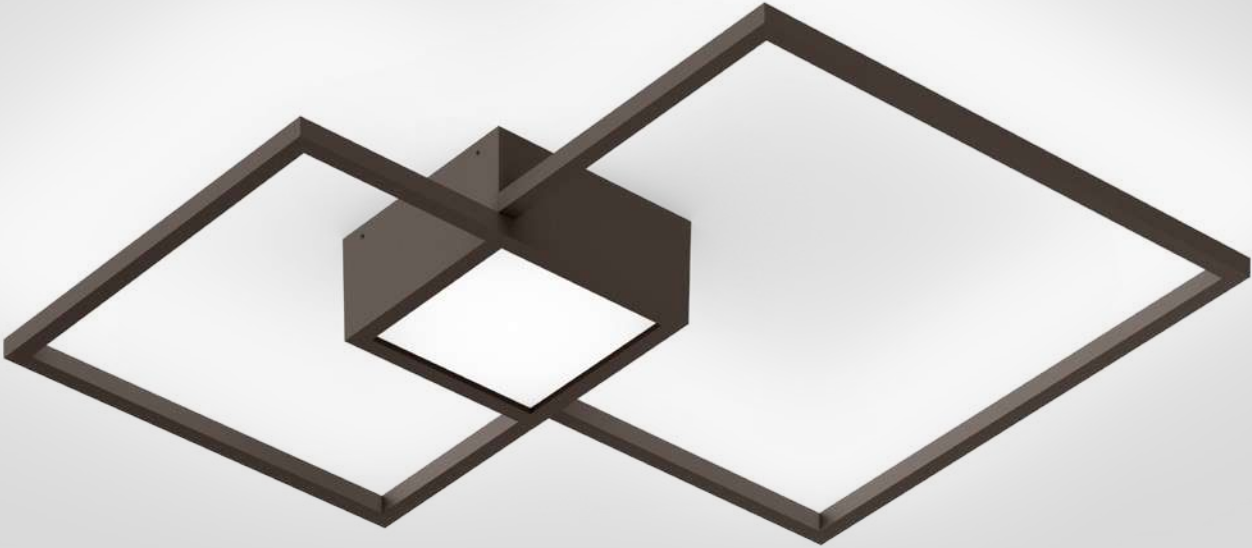

683



1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover indirect light

⊕ IP20 L70|55K

	CHF	CODE
	938,40	149184W_
	938,40	149184Q_
	938,40	149184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3410 >90	3
3000K	3510 >90	5

2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover dir./indir. light

⊕ IP20 L70|55K



	CHF	CODE
	1062,60	149284W_
	1062,60	149284Q_
	1062,60	149284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480/3920 >90	3
3000K	495/4035 >90	5





PRIVATE RESIDENCE | STUDIO REE THE NETHERLANDS

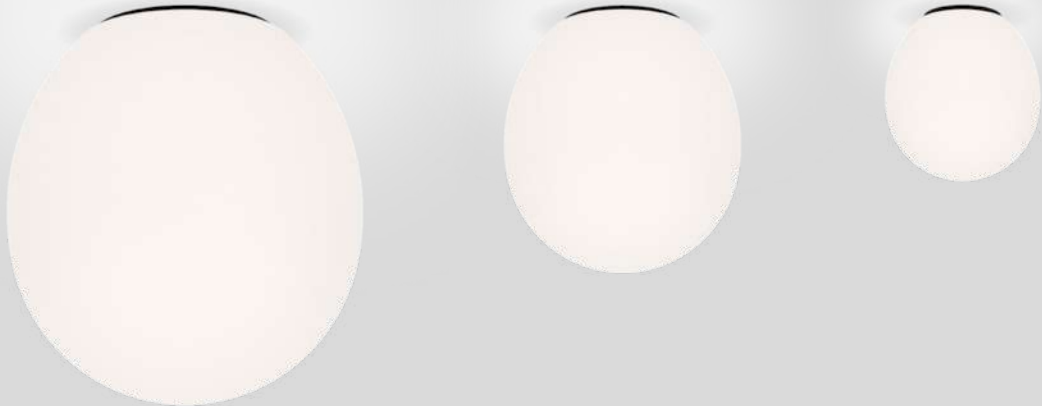

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	CHF	CODE
	227,70	1721G0WB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805



2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	CHF	CODE
	338,10	1722C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

	CHF	CODE
2700K 450lm	14,50	9003C103



3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	CHF	CODE
	448,50	1723E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 800lm	20,05	9003E152

DRO

Ceiling surface



373



465



623





715 | 731





MIRRO

Ceiling surface

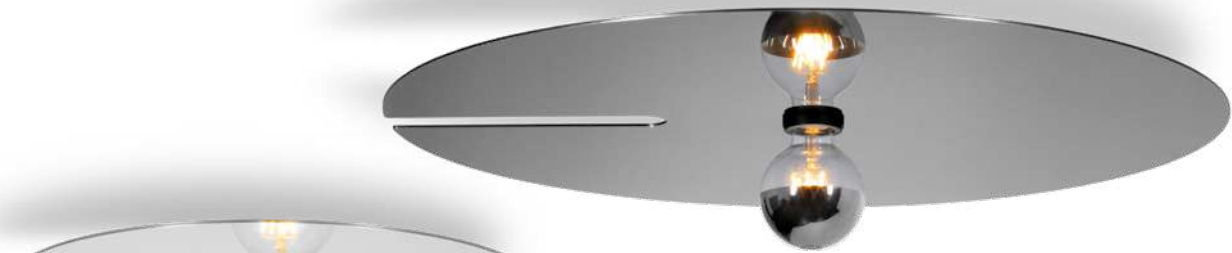

1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel



	CHF	CODE
	287,05	6321E0GB0
	287,05	6321E0NB0
	287,05	6321E0LB0
	287,05	6321E0BL0


OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2700K 405lm	44,20	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 405lm	44,20	9003E140



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel



	CHF	CODE
	353,30	6322E0GB0
	353,30	6322E0NB0
	353,30	6322E0LB0
	353,30	6322E0BL0


OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel



	CHF	CODE
	574,10	6323E0GB0
	574,10	6323E0NB0
	574,10	6323E0LB0
	574,10	6323E0BL0

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142



G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157



MIRRO SOFT

Ceiling surface



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material



	CHF	CODE
	353,30	6322E0MF0
	353,30	6322E0LF0
	353,30	6322E0IF0
	353,30	6322E0AF0

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material



	CHF	CODE
	574,10	6323E0MF0
	574,10	6323E0LF0
	574,10	6323E0IF0
	574,10	6323E0AF0

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

G95 10W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 1060lm	45,55	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 375lm	45,55	9003E160

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror


	CHF	CODE
2700K 395lm	48,30	9003E157

G95 10W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 1060lm	45,55	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 375lm	45,55	9003E160




1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

⊕ IP20 L80/50K

	CHF	CODE
	396,10	181184W_
	426,45	181184LS_
	426,45	181184SG_
	426,45	181184FJ_
	396,10	181184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	780 >90	3
3000K	825 >90	5




2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

⊕ IP20 L80/50K

	CHF	CODE
	589,30	181284W_
	633,45	181284LS_
	633,45	181284SG_
	633,45	181284FJ_
	589,30	181284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	780 >90	3
3000K	825 >90	5



3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

⊕ IP20 L80/50K

	CHF	CODE
	754,90	181384W_
	801,80	181384LS_
	801,80	181384SG_
	801,80	181384FJ_
	754,90	181384B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	770 >90	3
3000K	815 >90	5

CLEA


Ceiling surface




557



631



back

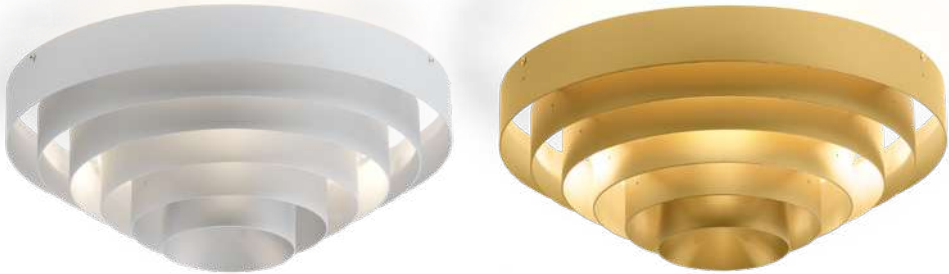


J.J.W.
Ceiling surface



479



633



03

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium



IP20

	CHF	CODE
	1193,70	2051E0S0
	1193,70	2051E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted


	CHF	CODE
2200K 245lm	42,80	9003E109

	CHF	CODE
A60 5.6W E27 phase-cut dim clear		
2700K 480lm	42,80	9003E138



WIRO

Ceiling surface



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel




	CHF	CODE
	379,50	2086E0V0
	379,50	2086E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 245lm	42,80	9003E109

	CHF	CODE
A60 5.6W E27 phase-cut dim clear		
2700K 480lm	42,80	9003E138



1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel




	CHF	CODE
	434,70	2082E0V0
	434,70	2082E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 380lm	53,85	9003E129
2700K 425lm	53,85	9003E136



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel




	CHF	CODE
	407,10	2080E0V0
	407,10	2080E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 380lm	53,85	9003E129
2700K 425lm	53,85	9003E136



3.8 WIRO

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel



	CHF	CODE
	561,70	2083E0V0
	561,70	2083E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 380lm	53,85	9003E129
2700K 425lm	53,85	9003E136





URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

iF DESIGN AWARD 2022
GOOD DESIGN
reddot winner 2021

ROOMOR OFFICE


Ceiling surface



1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

⊕ IP20 L80|60K UGR ≤ 19/65°



	CHF	CODE
	1028,10	1683M5W_
	1028,10	1683M5B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	3660 >90	5
4000K	3660 >90	7

1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover

⊕ IP20 L80|60K




	CHF	CODE
	1000,50	168385W_
	1000,50	168385B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	3700 >90	5
4000K	3700 >90	7



PERLEZ IP44

Ceiling surface



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

⊕ IP44 L80|50K

	CHF	CODE
	259,45	192484W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	520 >95	3
3000K	550 >95	5
4000K	580 >95	7

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

⊕ IP44 L80|50K

	CHF	CODE
	273,25	192584W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >95	3
3000K	630 >95	5
4000K	665 >95	7

3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

⊕ IP44 L80|50K

	CHF	CODE
	300,85	192684W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	645 >95	3
3000K	665 >95	5
4000K	705 >95	7

back




PRIVATE RESIDENCE | ATELIER B AUSTRIA



MIRBI IP44

Ceiling surface



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA
cover

⊕ IP44 L80/60K

3000K | CRI >90 | 640lm

	CHF	CODE
	255,30	175488W5
	255,30	175488BW5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA
cover

⊕ IP44 L80/60K

3000K | CRI >90 | 640lm

	CHF	CODE
	269,10	175588W5
	269,10	175588BW5




PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM



TAIO IP65

Ceiling surface



1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

⊕ IP65 ⚡ W-105° L80I55K

	CHF	CODE
	273,25	180884W_
	273,25	180884Q_
	273,25	180884B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	455 >90	3
3000K	510 >90	5






GAW HOPPEHOF ERTVELDE | BELGIUM

ROB IP44

Ceiling surface




1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 L80|60K

	CHF	CODE
	231,85	701188W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1170 >90	3
3000K	1220 >90	5




2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 L80|60K

	CHF	CODE
	338,10	701288W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1800 >90	3
3000K	1810 >90	5



3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 L80|60K

	CHF	CODE
	462,30	701388W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3340 >90	3
3000K	3360 >90	5




769



ROBY IP44

Ceiling surface




1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 L80|60K

	CHF	CODE
	300,85	135188W_
	300,85	135188B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1080 >90	3
3000K	1130 >90	5




2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 L80|60K

	CHF	CODE
	438,85	135288W_
	438,85	135288B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1670 >90	3
3000K	1680 >90	5



3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 L80|60K



	CHF	CODE
	590,65	135388W_
	590,65	135388B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3090 >90	3
3000K	3100 >90	5



TOWNA IP44

Ceiling surface

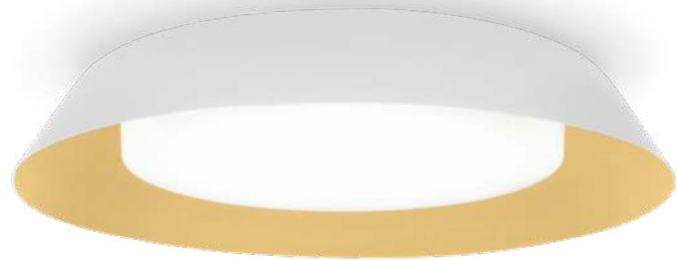

1.0


LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

⊕ IP44 L80|60K



	CHF	CODE
	347,80	178188W_
	351,90	178188J_
	351,90	178188K_
	351,90	178188Z_
	347,80	178188B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	1070 >90	3
3000K	1110 >90	5



2.0


LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

⊕ IP44 L80|60K



	CHF	CODE
	498,20	178288W_
	503,70	178288J_
	503,70	178288K_
	503,70	178288Z_
	498,20	178288B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1650 >90	3
3000K	1660 >90	5




3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

⊕ IP44 L80|60K




	CHF	CODE
	651,40	178388W_
	661,05	178388J_
	661,05	178388K_
	661,05	178388Z_
	651,40	178388B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3050 >90	3
3000K	3060 >90	5



ROSS IP54

Ceiling surface



771

1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via
dip switch

⊕ IP54 L80l50K

3000K/4000K/6000K | CRI >90
960lm/1170lm/1630lm

CHF	CODE
109,05	715184W9

2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via
dip switch

⊕ IP54 L80l50K

3000K/4000K/6000K | CRI >90
1270lm/1810lm/2360lm

CHF	CODE
178,05	715284W9






3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via
dip switch

⊕ IP54 L80l50K

3000K/4000K/6000K | CRI >90
4350lm/5000lm/5570lm

CHF	CODE
310,50	715384W9

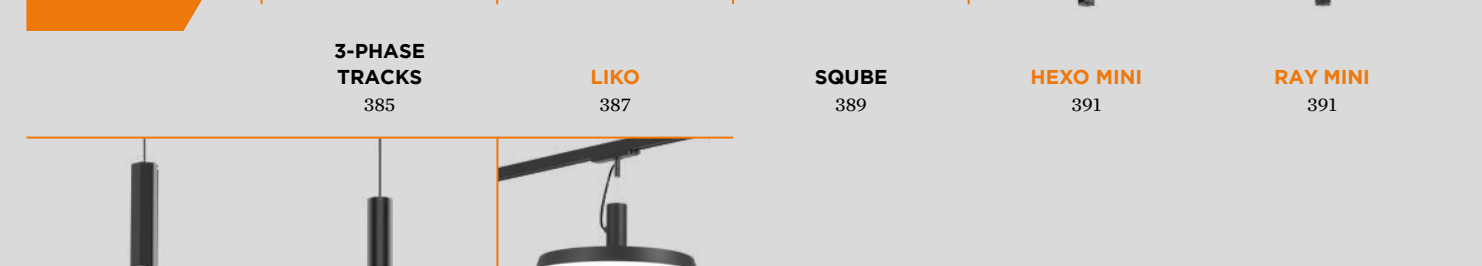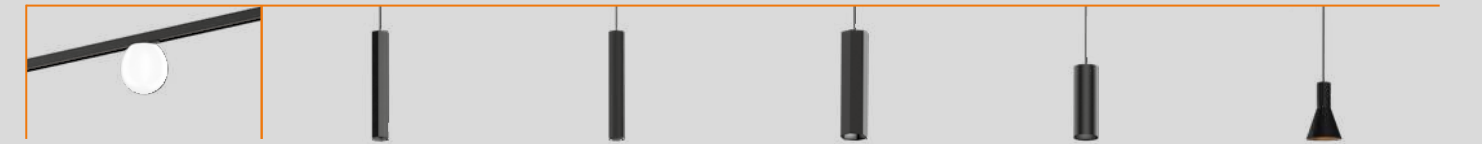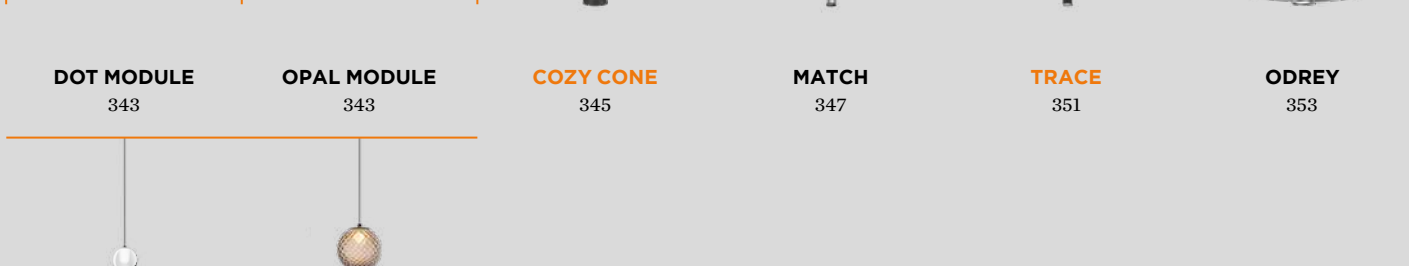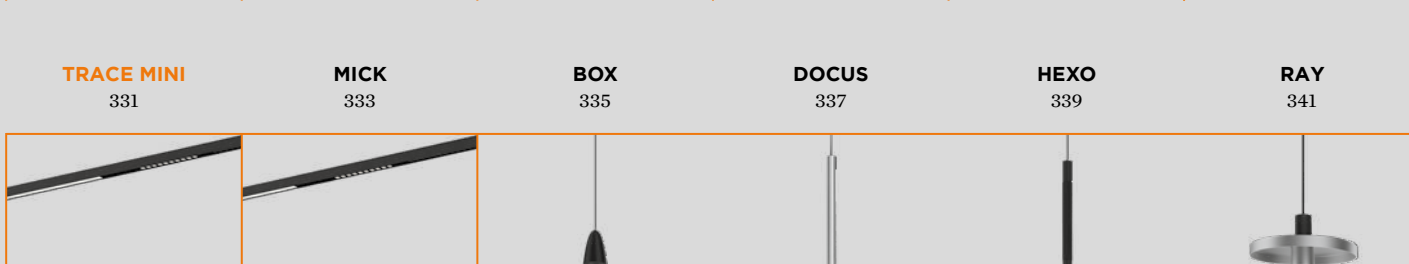

ON THE RIGHT TRACK










Schienensysteme sind einfacher als gedacht: 1-Phasen-Schienen steuern alle Leuchten gemeinsam, 3-Phasen-Schienen erlauben die separate Bedienung von Strahlern, Insets und Pendeln. Das 48-Volt-System bietet maximale Flexibilität für verschiedene Leuchten – und lässt sich bequem per Smartphone steuern.

Les systèmes sur rail sont plus simples qu'ils n'en ont l'air : les rails 1 phase contrôlent tous les luminaires ensemble, tandis que les rails 3 phases permettent de gérer séparément spots, modules et suspensions. Le système 48 volts offre une flexibilité maximale et se commande facilement via smartphone.



weverducre.com/track-lighting

track

	STREX 48V DALI page 313	1-PHASE TRACK 220-240V page 361	3-PHASE TRACK 220-240V DALI page 385
1 CHOOSE YOUR MOUNTING	 recessed surface suspended suspended indirect	 recessed surface suspended	 surface suspended
2 INSTALL IT IN YOUR LAYOUT			
3 CHOOSE YOUR DRIVER	 remote in-line in-track ceiling		
4 COMBINE IT WITH INSETS			

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq

mounting

STREX

48V system




weverducre.com/strex-configurator

Discreetly hidden in the ceiling, as a striking surface-mounted option, or floating freely in the room – with three mounting types you'll find the right solution for any space. Tip: sketch your project and note where the track should run and which zones you want to highlight for a clearer overview.

CUSTOM CUT AVAILABLE

Have a look on page 917 or browse online: weverducre.com/strex-custom

CEILING RECESSED



STREX RECESSED

track 48V | 15A | DALI


SELV 31-33 65 5-25

	CHF	CODE
1m	158,70	904111W0
1m	158,70	904111B0
2m	324,30	904112W0
2m	324,30	904112B0
3m	481,65	904113W0
3m	481,65	904113B0

M | MOUNTING BRACKET

recessed mounting bracket
for 1m - 2pcs needed | for 2m - 4pcs
needed | for 3m - 6pcs needed


	CHF	CODE
1m	17,25	904141I0



E | END CAP

	CHF	CODE
16,60	16,60	904121W0
16,60	16,60	904121B0

CEILING SURFACE



STREX SURFACE

track 48V | 15A | DALI


SELV

	CHF	CODE
1m	122,85	904211W0
1m	122,85	904211B0
2m	240,15	904212W0
2m	287,05	904212L0
2m	287,05	904212M0
2m	287,05	904212Q0
2m	240,15	904212B0
3m	356,05	904213W0
3m	426,45	904213L0
3m	426,45	904213M0
3m	426,45	904213Q0
3m	356,05	904213B0

E | END CAP

	CHF	CODE
10,35	10,35	904221W0
11,05	11,05	904221M0
11,05	11,05	904221Q0
10,35	10,35	904221B0

CEILING SUSPENDED

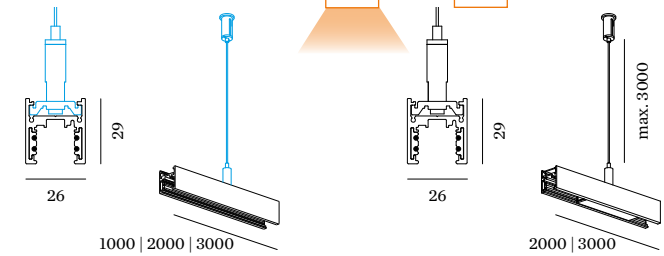

STREX SUSPENDED

track 48V | 15A | DALI

SELV

	CHF	CODE
1m	122,85	904211W0
1m	122,85	904211B0
2m	240,15	904212W0
2m	287,05	904212L0
2m	287,05	904212M0
2m	287,05	904212Q0
2m	240,15	904212B0
3m	356,05	904213W0
3m	426,45	904213L0
3m	426,45	904213M0
3m	426,45	904213Q0
3m	356,05	904213B0

STREX SUSP. INDIRECT

track 48V | 15A | DALI | with indirect
light | 3.0m suspension sets already
included | 15W/m

SELV

3000K | CRI >90 | 1900lm

	CHF	CODE
2m	793,50	904512W5
2m	793,50	904512B5

3000K | CRI >90 | 2850lm

	CHF	CODE
3m	931,50	904513W5
3m	931,50	904513B5

S | SUSPENSION SET

complete suspension set | incl. ceiling
fixation bracket | not needed for
indirect light version | for 1m - 2pcs
needed | for 2m - 3pcs needed
for 3m - 4pcs needed

stainless steel colour


	CHF	CODE
max. 1.5m	40,05	904341I0
max. 3m	42,80	904342I0

black colour

	CHF	CODE
max. 1.5m	40,05	904341B0
max. 3m	42,80	904342B0

E | END CAP

	CHF	CODE
10,35	10,35	904221W0
11,05	11,05	904221M0
11,05	11,05	904221Q0
10,35	10,35	904221B0



back


Layout

STREX


48V system




weverducre.com/strex-configurator

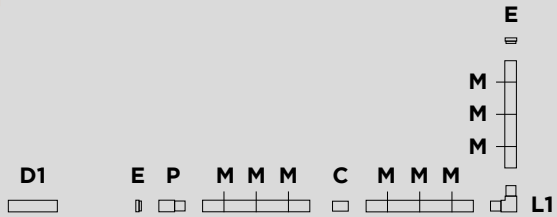

M | S | E
Choose your mounting
on page 312

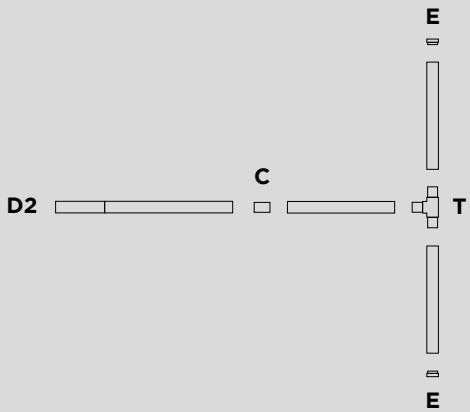


D | P
Choose your driver | power feed
on page 316

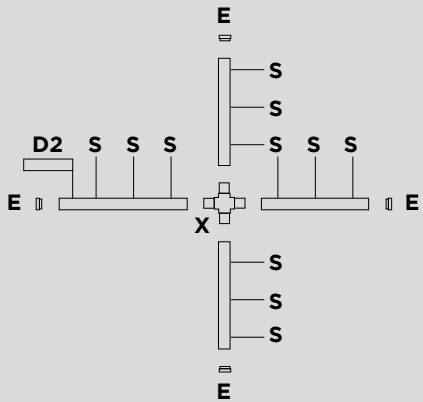


GOOD TO KNOW
Electrical components of champagne
or bronze connectors and drivers will
be black.

ALL MOUNTINGS



BLANK COVER

	CHF	CODE
2m	70,40	911002W0
2m	70,40	911002B0




C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CHF	CODE
	55,20	904431W0
	55,20	904431B0


CEILING RECESSED



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CHF	CODE
	249,80	904132W0
	249,80	904132B0




L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

	CHF	CODE
	249,80	904133W0
	249,80	904133B0


CEILING SURFACE | SUSPENDED



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right


	CHF	CODE
	162,85	904232W0
	167,00	904232MB0
	167,00	904232QB0
	162,85	904232B0



L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation


	CHF	CODE
	162,85	904233W0
	167,00	904233MB0
	167,00	904233QB0
	162,85	904233B0



T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CHF	CODE
	273,25	904234W0
	273,25	904234B0



X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CHF	CODE
	309,15	904235W0
	309,15	904235B0

back

driver



weverducre.com/strex-configurator

STREX


48V system

A driver regulates the current flowing through your LED lights, preventing overheating and unwanted flickering. Which is best suited to your STREX system depends on the chosen installation. The most elegant solution is an in-track driver, but many other variants are also available.

GOOD TO KNOW


Electrical components of champagne or bronze connectors and drivers will be black.

CEILING RECESSED | SURFACE




D1 | REMOTE DRIVER

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed adapter



	CHF	CODE
100W 48V	122,85	90218901
150W 48V	149,05	90218902


for more information see page 917



P | POWER FEED


48V | 15A | DALI | end/middle power
feed adapter | max. 4 x 1.5mm²

	CHF	CODE
	52,45	904451W0
	52,45	904451B0




D2 | IN LINE DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring




	CHF	CODE
100W	383,65	904262W0
100W	383,65	904262B0
150W	397,45	904272W0
150W	397,45	904272B0




D3 | IN TRACK DRIVER SURFACE


220-240VAC | 50-60Hz | 48V
incl. power end feed function
with in line connection box



	CHF	CODE
100W	329,85	904263W0
100W	334,00	904263MB0
100W	334,00	904263QB0
100W	329,85	904263B0




	CHF	CODE
250W	385,05	904283W0
250W	389,20	904283MB0
250W	389,20	904283QB0
250W	385,05	904283B0




D4 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed function
with in track connection




	CHF	CODE
100W	314,65	904264W0
100W	314,65	904264B0




	CHF	CODE
250W	369,85	904284W0
250W	369,85	904284B0

CEILING SUSPENDED




D1 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed adapter
incl. DALI through wiring
driver ceiling mounted




	CHF	CODE
100W	411,25	904361W0
100W	411,25	904361B0
150W	438,85	904371W0
150W	438,85	904371B0




D2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring
suspended driver in line with profile




	CHF	CODE
100W	448,50	904362W0
100W	448,50	904362B0
150W	480,25	904372W0
150W	480,25	904372B0




D3 | IN TRACK DRIVER


220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
suspended driver in the profile



	CHF	CODE
100W	369,85	904363W0
100W	374,00	904363MB0
100W	374,00	904363QB0
100W	369,85	904363B0




	CHF	CODE
250W	434,70	904383W0
250W	434,70	904383B0




D4 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
incl. remote driver



	CHF	CODE
100W	328,45	904364W0
100W	328,45	904364B0
150W	356,05	904374W0
150W	356,05	904374B0



	CHF	CODE
250W	393,30	904384W0
250W	393,30	904384B0




back

control

STREX

48V system

ALL MOUNTINGS



WIRELESS CASAMBI CONTROL


8W | adapter for wireless control of 64 DALI fixtures in max. 8 groups

	CHF	CODE
	710,70	904491W0
	710,70	904491B0

HOW TO CONTROL MY STREX SYSTEM

Das Großartige am STREX-System? Es bietet unzählige Möglichkeiten. Das Schalten oder Dimmen Ihrer Leuchten ist mit DALI ganz einfach. Wenn Sie kein fest verdrahtetes System installieren möchten, wählen Sie eine flexiblere Lösung – alles, was Sie benötigen, sind ein Casambi-Steuermodul und kompatible DALI-Module.

Qu'est-ce qui rend le système STREX si intéressant ? Il offre d'innombrables possibilités. Allumer ou varier l'intensité de vos luminaires est très simple avec DALI. Et si vous ne souhaitez pas installer un système câblé, optez pour une configuration plus flexible – il vous suffit d'un module de commande Casambi et d'inserts DALI compatibles.

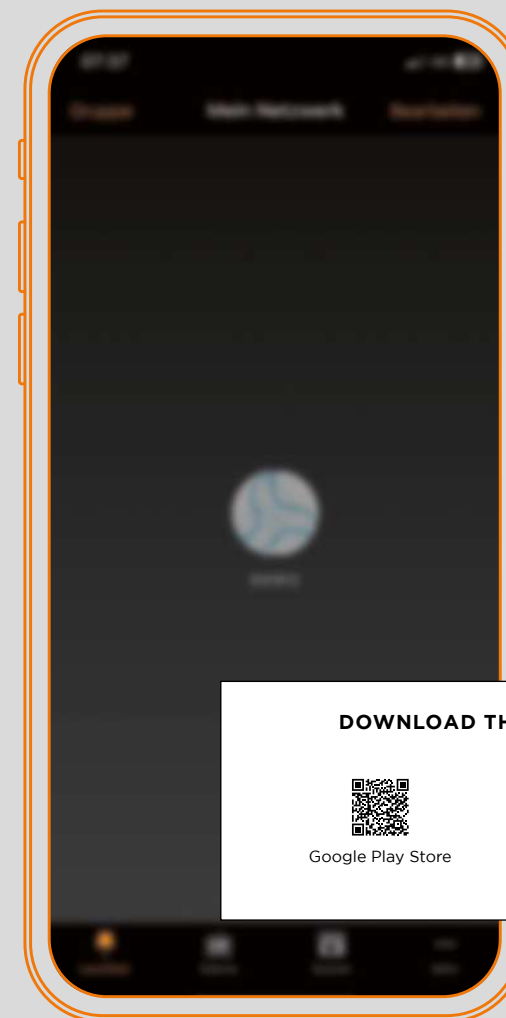

DOWNLOAD THE CASAMBI APP




Google Play Store



App Store

CREATE A SCENE FOR YOUR
INDIVIDUAL LIGHTING SOLUTION








PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



CENO on STREX

48V system



1.0

LED COB 10W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

	CHF	CODE
	231,85	166562W_
	231,85	166562BQ_
	231,85	166562K_
	231,85	166562CH_
	231,85	166562B_

DALI-2

	CHF	CODE
	351,90	166565W_
	351,90	166565BQ_
	351,90	166565K_
	351,90	166565CH_
	351,90	166565B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5

accessories on page 910

2.0

LED COB 17W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

	CHF	CODE
	356,05	166662W_
	356,05	166662BQ_
	356,05	166662K_
	356,05	166662CH_
	356,05	166662B_

DALI-2

	CHF	CODE
	462,30	166665W_
	462,30	166665BQ_
	462,30	166665K_
	462,30	166665CH_
	462,30	166665B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x510 >90	5

accessories on page 910



honeycomb

OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0



back



PRIVATE RESIDENCE | DESIGN IN LIGHT | MIRTHE JANUS THE NETHERLANDS





PRIVATE RESIDENCE | STUDIO BINNEN THE NETHERLANDS

LECA on STREX

48V system

135

189

569

115 | 171
55
Ø32

1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|350° M-31° L80|50K

non dim

	CHF	CODE
	245,65	188662W_
	245,65	188662BQ_
	245,65	188662B_

DALI-2

	CHF	CODE
	364,35	188665W_
	364,35	188665BQ_
	364,35	188665B_

honeycomb

OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	585 >90	3
3000K	620 >90	5


back

WEVER & DUCRÉ 324 — 325



DOMY on STREX

48V system



1.0

LED COB 7W | 48V
aluminium | glass | PC adapter

IP20 0-90°|350° M-25° L80|50K

non dim

	CHF	CODE
	242,90	107452WLS_
	242,90	107452WFJ_
	242,90	107452WSG_
	242,90	107452BT_
	242,90	107452BB_

DALI-2

	CHF	CODE
	361,60	107455WLS_
	361,60	107455WFJ_
	361,60	107455WSG_
	361,60	107455BT_
	361,60	107455BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	560 >90	3
3000K	575 >90	5



back



RESTAURANT GARDENS | ANDREAS HUHN ARCHITEKTEN TÜBINGEN | GERMANY



MATCH on STREX

48V system 61 | 137 | 153



193



415 | 509




571



589 | 685



723 | 729



1.0

LED COB10W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-30° L80|50K

non dim

	CHF	CODE
	242,90	179152W_
	251,20	179152BL_
	251,20	179152CH_
	251,20	179152BQ_
	242,90	179152B_

DALI-2

	CHF	CODE
	361,60	179155W_
	369,85	179155BL_
	369,85	179155CH_
	369,85	179155BQ_
	361,60	179155B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530 >90	3
3000K	560 >90	5

accessories on page 910



back




TRACE mini on STREX

48V system



591



1.0

LED PCB 5W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-30° L80|50K

non dim

	CHF	CODE
	172,50	333552W_
	172,50	333552BM_
	172,50	333552B_

DALI-2

	CHF	CODE
	255,30	333555W_
	255,30	333555BM_
	255,30	333555B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	326 >90	3
3000K	336 >90	5



back




DENTAL PRACTICE M.K.A. | DMG ARCHITECTURAL SOLUTIONS KAPELLEN | BELGIUM




MICK on STREX

48V system





115 | 171
130 / 26



171
26 / 130

1.0

LED COB 13W | 48V
aluminium | PC adapter

 IP20 0-90°|360°  M-23° L80|50K

non dim	CHF	CODE
	260,85	159442J_
	260,85	159442K_

DALI-2

	CHF	CODE
	393,30	159445J_
	393,30	159445K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	435 >90	5

accessories on page 910

2.0

LED COB 22W | 48V
aluminium | PC adapter

 IP20 0-90°|360°  M-23° L80|50K

non dim	CHF	CODE
	390,45	159542J_
	390,45	159542K_


DALI-2

	CHF	CODE
	536,85	159545J_
	536,85	159545K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x445 >90	3
3000K	2x465 >90	5

accessories on page 910







332 — 333




PRIVATE RESIDENCE BELGIUM



BOX on STREX

48V system



1.0

LED COB 9W | 48V
aluminium


IP20 M-25° L80|55K

adapter 2700K CRI >90 505lm	
	CHF CODE
	259,45 258162W_3
	259,45 258162B_3
DALI-2	325,70 258165W_3
DALI-2	325,70 258165B_3

adapter 3000K CRI >90 535lm	
	CHF CODE
	259,45 258162W_5
	259,45 258162B_5
DALI-2	325,70 258165W_5
DALI-2	325,70 258165B_5

housing inner reflector colour	
	CODE
	W
	WM
	E
	M
	H
	Q
	CH
	B

only for ceiling surface and suspended tracks

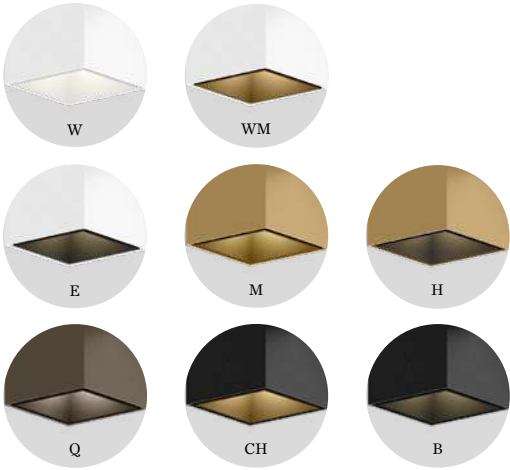



DOCUS on STREX

48V system

241

82

70

171

70

1.0

LED COB 9W | 48V
aluminium

IP20

M-25°

 L80|55K

adapter | 2700K | CRI >90 | 505lm

	CHF	CODE
	269,10	258362W_3
	269,10	258362B_3
DALI-2	335,35	258365W_3
DALI-2	335,35	258365B_3

adapter | 3000K | CRI >90 | 535lm

	CHF	CODE
	269,10	258362W_5
	269,10	258362B_5
DALI-2	335,35	258365W_5
DALI-2	335,35	258365B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	K
	B

only for ceiling surface and suspended tracks

W

J

E

K

B

back

WEVER & DUCRÉ

336 — 337



HEXO on STREX

48V system

245

533

1.0

LED COB 9W | 48V
aluminium

IP20 M-25° 180|55K

adapter | 2700K | CRI >90 | 505lm

	CHF	CODE
	269,10	258462W_3
	269,10	258462B_3
DALI-2	335,35	258465W_3
DALI-2	335,35	258465B_3

adapter | 3000K | CRI >90 | 535lm

	CHF	CODE
	269,10	258462W_5
	269,10	258462B_5
DALI-2	335,35	258465W_5
DALI-2	335,35	258465B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	K
	B

only for ceiling surface and suspended tracks

back

WEVER & DUCRÉ 338 — 339



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

RAY on STREX

48V system

82 | 171
ø70

251

537

615

759

805

1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 485lm

	CHF	CODE
	259,45	258262W_3
	259,45	258262B_3
DALI-2	325,70	258265W_3
DALI-2	325,70	258265B_3

adapter | 3000K | CRI >90 | 515lm

	CHF	CODE
	259,45	258262W_5
	259,45	258262B_5
DALI-2	325,70	258265W_5
DALI-2	325,70	258265B_5

housing | inner reflector colour

	CODE
	W
	WM
	E
	M
	H
	Q
	CH
	B

only for ceiling surface and suspended tracks

back

WEVER & DUCRÉ 340 — 341



STREX MODULE

48V system



1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 $\angle$ W-40° UGR≤19 L80/60K


non dim

	CHF	CODE
	383,65	171362W_
	383,65	171362B_

DALI

	CHF	CODE
	474,75	171365W_
	474,75	171365B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	840 >90	3
3000K	860 >90	5



1.0 OPAL

LED PCB 15W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80/60K


non dim

	CHF	CODE
	259,45	171382W_
	259,45	171382B_

DALI

	CHF	CODE
	314,65	171385W_
	314,65	171385B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	620 >90	3
3000K	640 >90	5



2.0 OPAL

LED PCB 29W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80/60K

non dim

	CHF	CODE
	371,25	171482W_
	371,25	171482B_

DALI

	CHF	CODE
	426,45	171485W_
	426,45	171485B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1240 >90	3
3000K	1280 >90	5



dot



opal



MORE VERSIONS ONLINE
weverducre.com/more-strex-module



back




COZY CONE on STREX

48V system



503




1.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T- black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

	CHF	CODE
	382,30	241665LS3
	382,30	241665SG3
	382,30	241665FJ3
	393,30	241665T3
	382,30	241665B3




2.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T- black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

	CHF	CODE
	389,20	241765LS3
	389,20	241765SG3
	389,20	241765FJ3
	400,20	241765T3
	389,20	241765B3




3.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T- black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

	CHF	CODE
	396,10	241865LS3
	396,10	241865SG3
	396,10	241865FJ3
	407,10	241865T3
	396,10	241865B3







PRIVATE RESIDENCE | DÉVÉ CREATIONS THE NETHERLANDS

 **DESIGN AWARD 2023**
 **reddot winner 2023**

MATCH on STREX

48V system 61 | 137 | 153




3.0


LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 $\angle$ W-54° L80|50K

	CHF	CODE
	369,85	179775W_
	379,50	179775L_
	379,50	179775M_
	379,50	179775Q_
	369,85	179775B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5


easy cable adjustment


back

MATCH on STREX

48V system 61 | 137 | 153



5.0

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 $\angle$ W-54° L80|50K


	CHF	CODE
	387,80	179875W_
	400,20	179875L_
	400,20	179875M_
	400,20	179875Q_
	387,80	179875B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5


MORE VERSIONS ONLINE
weverducre.com/more-match-on-strex




OFFICE LAMETT DEERLIJK | BELGIUM

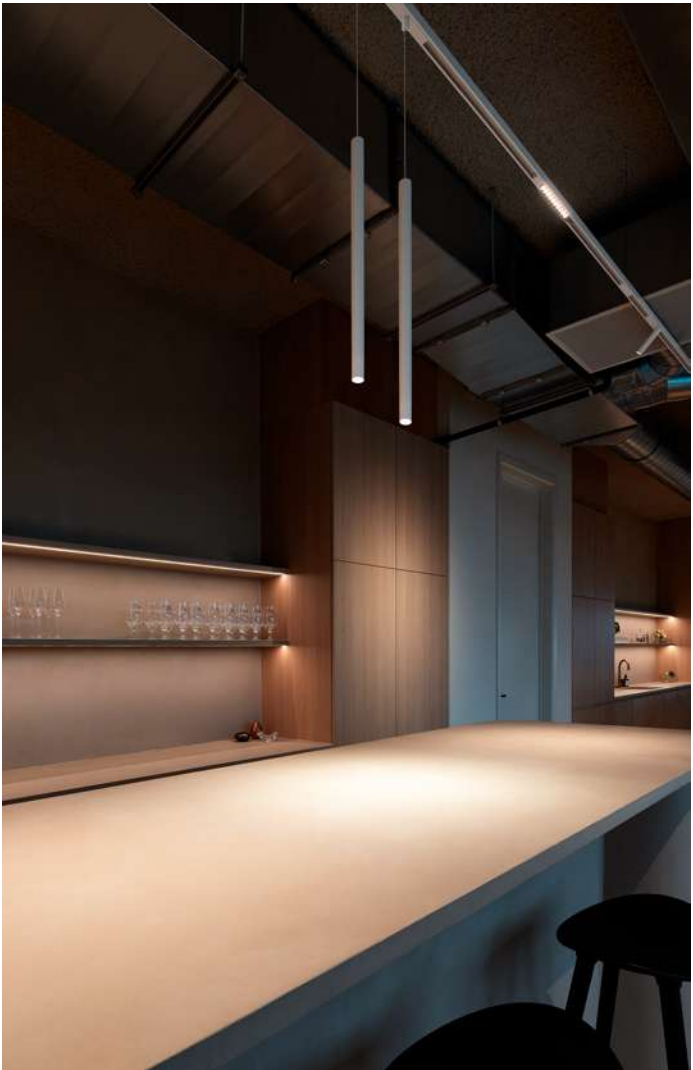





MORE VERSIONS ONLINE
weverducre.com/more-trace-on-strex



TRACE on STREX

48V system

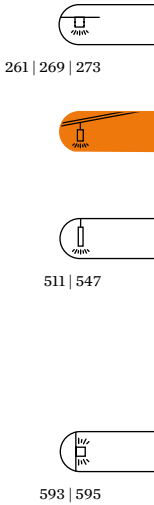


3.0

LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adaptor
others – black cable/adaptor

IP20 W-54° L80|50K

	CHF	CODE
	396,10	333875W_
	405,75	333875BL_
	405,75	333875BM_
	396,10	333875B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



5.0

LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adaptor
others – black cable/adaptor

IP20 W-54° L80|50K

	CHF	CODE
	408,50	333975W_
	420,90	333975BL_
	420,90	333975BM_
	408,50	333975B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



PRIVATE RESIDENCE | TOM LIERMAN BUREAU VOOR ARCHITECTUUR & INTERIEUR BELGIUM

ODREY on STREX

48V system

easy cable adjustment

WW

QQ

BG

BL

BB

1.2

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	CHF	CODE
	538,20	197265WW_
	538,20	197265QQ_
	538,20	197265BL_
	538,20	197265BG_
	538,20	197265BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	445 >90	5

1.4

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	CHF	CODE
	458,20	197465WW_
	458,20	197465QQ_
	458,20	197465BL_
	458,20	197465BG_
	458,20	197465BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	470 >90	5

1.6

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	CHF	CODE
	463,70	197665WW_
	463,70	197665QQ_
	463,70	197665BL_
	463,70	197665BG_
	463,70	197665BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	505 >90	5

optional inner cover on page 910

MORE VERSIONS ONLINE
weverducre.com/more-odrey-on-strex

back



PRIVATE RESIDENCE | WALRAVENS WEETS ARCHITECTEN
BELGIUM




OPLIA on STREX

48V system



457 | 521




1.0

LED PCB 5W | 48V | DALI-2
aluminium | glass | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 L80/100K

2700K | CRI >90 | 245lm

	CHF	CODE
	405,75	246285W3
	405,75	246285M3
	405,75	246285B3



back



SOLLI on STREX

48V system




1.0

LED COB 7W | 48V | DALI-2
aluminium | black cable
artisanal Italian hand blown glass
PC adapter


IP20 L80|50K

	CHF	CODE
	527,20	238985FD_
	527,20	238985TD_
	474,75	238985WB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	280 >90	3
3000K	290 >90	5



back

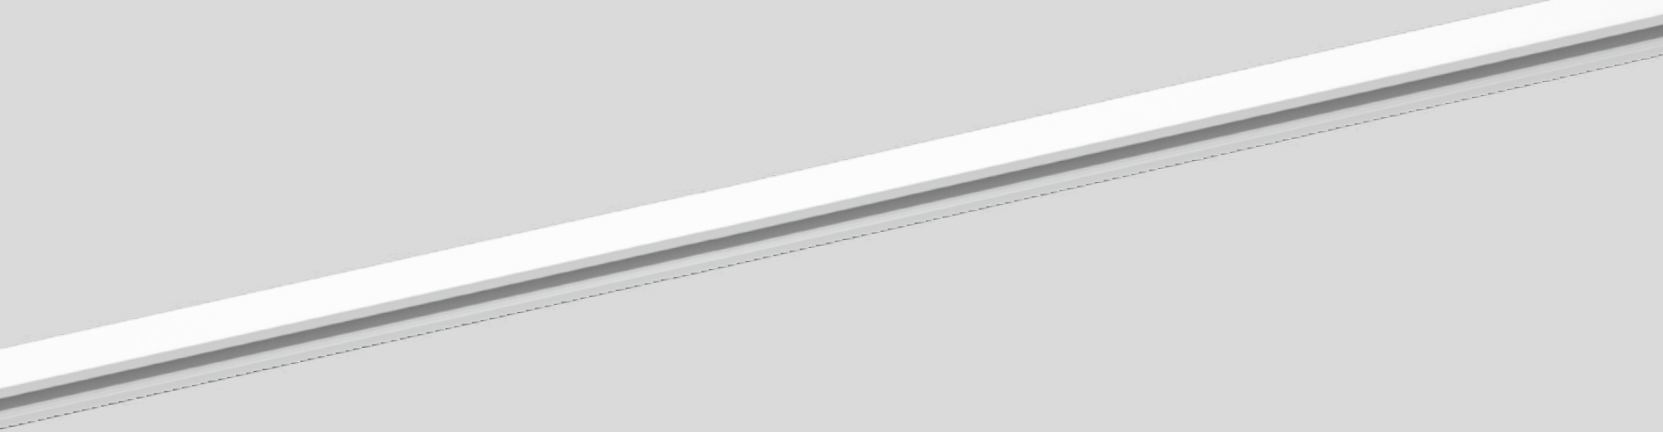



1-PHASE TRACKS

220-240V *tracks / accessories*

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view


for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq

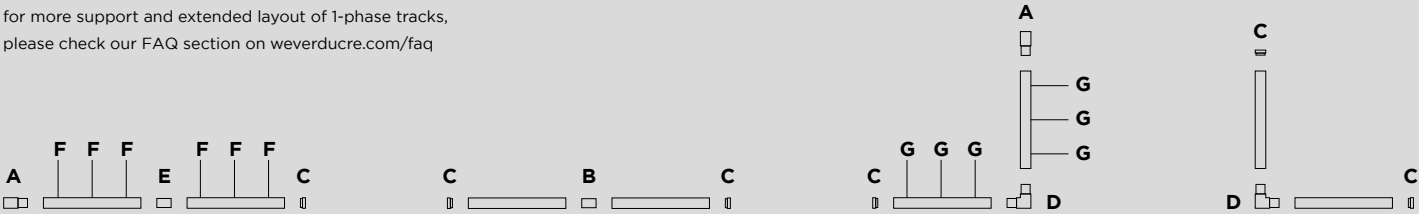

A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A


	CHF	CODE
	21,40	90014018
	21,40	90014019



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A


	CHF	CODE
	21,40	90014020
	21,40	90014021



B | MIDDLE FEED


straight
220-240V | max. 3 x 1.5mm² - 16A

	CHF	CODE
	51,10	90014036
	51,10	90014037



C | END CAP LEFT/RIGHT

	CHF	CODE
	4,85	90014028
	4,85	90014029




TRACK PROFILE

recessed | 220-240V | 16A



	CHF	CODE
 1m	85,60	90014118
 1m	85,60	90014119
 2m	158,70	90014120
 2m	158,70	90014121
 3m	209,80	90014122
 3m	209,80	90014123




F | MOUNTING BRACKET

for recessed fixation



	CHF	CODE
 1m	15,90	90014100
for 1.0m - 2pcs needed		
for 2.0m - 3pcs needed		
for 3.0m - 4pcs needed		



TRACK PROFILE

surface | suspended | 220-240V | 16A




	CHF	CODE
 1m	60,75	90014001
 1m	60,75	90014007
 2m	121,45	90014002
 2m	121,45	90014008
 3m	187,70	90014003
 3m	187,70	90014009



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket


	CHF	CODE
 max. 1.5m	38,65	90014101
 max. 1.5m	38,65	90014102
 max. 3m	45,55	90014103
 max. 3m	45,55	90014104
for 1.0m - 2pcs needed		
for 2.0m - 3pcs needed		
for 3.0m - 4pcs needed		



D | L-FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A


	CHF	CODE
	52,45	90014024
	52,45	90014025



D | L-FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A


	CHF	CODE
	52,45	90014026
	52,45	90014027



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CHF	CODE
	19,35	90014022
	19,35	90014023



COVERPLATE END FEED

only use with recessed tracks

	CHF	CODE
	13,15	90014124
	13,15	90014125

more 1-phase track accessories on
page 918




PILLO on track

1-Phase



201



1.0


PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

⚡ ⓘ IP20 0°-90°/350°

	CHF	CODE
White	99,40	194420W0
Black	99,40	194420B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim			
	CHF	CODE	
2700K 225lm	20,05	901128B3	
3000K 235lm	20,05	901128B5	





ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOCKE-HEIST | BELGIUM



SARA on track



1-Phase



203



689



1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

⊕ IP20 0-90°|355° ⚡ M-34° L70|55K

	CHF	CODE
	218,05	157168W_
	226,35	157168G_
	226,35	157168K_
	218,05	157168B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	655 >80	3
3000K	700 >80	5

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

⊕ IP20 0-90°|355°

	CHF	CODE
	121,45	157120W0
	129,75	157120G0
	129,75	157120K0
	121,45	157120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	2700K 445lm	22,80 901228W3
	2700K 440lm	22,80 901228B3
	3000K 465lm	22,80 901228W5
	3000K 460lm	22,80 901228B5


more lamps and info on page 905



black ring
LED



W



G



PAR16



K



B



back





SQUBE on track

1-Phase

205

1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

⊕ IP20 0-90°|355° ⚡ M-39° L70|55K

	CHF	CODE
	241,50	144168W_
	241,50	144168B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	430 >90	5
1800-3000K	350 >90	9

black ring LED

PAR16

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

⊕ IP20 0-90°|355°

	CHF	CODE
	150,45	144120W0
	150,45	144120B0

OPTIONAL


PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905

back

WEVER & DUCRÉ 368 — 369



white fixtures with white adapter
other fixtures with black adapter




PIRRO on track

1-Phase

77

215 | 221 | 223



2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

⊕ IP20 310° $\angle$ M-32° L70|55K


	CHF	CODE
	269,10	173264E_
	269,10	173264K_
	269,10	173264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x355 >90	3
3000K	2x385 >90	5

OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0



4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

⊕ IP20 310° $\angle$ M-32° L70|55K


	CHF	CODE
	351,90	173464E_
	351,90	173464K_
	351,90	173464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x365 >90	3
3000K	4x380 >90	5

OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915230B0




2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

⊕ IP20 310° L80|60K

	CHF	CODE
	269,10	173284E_
	269,10	173284K_
	269,10	173284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	270 >90	3
3000K	280 >90	5



4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

⊕ IP20 310° L80|60K

	CHF	CODE
	351,90	173484E_
	351,90	173484K_
	351,90	173484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	685 >90	3
3000K	710 >90	5



back



DRO on track

1-Phase



279




465



623



715 | 731



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
1-phase Global® track adapter

IP20

CHF	CODE
213,90	1724G0WB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805



HEXO mini | RAY mini on track

1-Phase



HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter




3.0		
300mm	CHF	CODE
	190,45	259320M0
	190,45	259320Q0
	190,45	259320B0

5.0			
500mm	CHF		CODE
	218,05		259420M0
	218,05		259420Q0
	218,05		259420B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim		CHF	CODE
	2700K 225lm	20,05	901128B3
	3000K 235lm	20,05	901128B5



RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white and LS – white cable/adapter
others – black cable/adapter



3.0		CHF	CODE
300mm			
	180,80	260320W0	
	180,80	260320LS0	
	180,80	260320Q0	
	180,80	260320B0	

5.0		CHF	CODE
500mm			
	208,40	260420W0	
	208,40	260420LS0	
	208,40	260420Q0	
	208,40	260420B0	


OPTIONAL

PAR11 4.3W GU10 phase-cut dim		CHF	CODE
	2700K 240lm	20,05	901128W3
	2700K 225lm	20,05	901128B3
	3000K 255lm	20,05	901128W5
	3000K 235lm	20,05	901128B5



HEXO | RAY on track

1-Phase




HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20

3.0	CHF	CODE
300mm		
	167,00	215620G0
	167,00	215620Q0
	167,00	215620P0
	164,25	215620B0



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

2.0	CHF	CODE
200mm		
	140,80	217520W0
	150,45	217520G0
	150,45	217520M0
	150,45	217520Q0
	150,45	217520P0
	140,80	217520B0

3.0	CHF	CODE
300mm		
	149,05	217620W0
	158,70	217620G0
	158,70	217620M0
	158,70	217620Q0
	158,70	217620P0
	149,05	217620B0

OPTIONAL

PAR16 6.1W GU10 phase-cut dim	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

OPTIONAL

PAR16 6.1W GU10 phase-cut dim	CHF	CODE
2700K 440lm	22,80	901228B3
3000K 460lm	22,80	901228B5

more lamps and info on page 905

more lamps and info on page 905



PRIVATE RESIDENCE | BRITTE MARCUS BELGIUM

ODREY on track

1-Phase

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adaptor
others – black cable/adaptor

⏸ IP20

	CHF	CODE
	212,55	187120WW0
	212,55	187120GG0
	212,55	187120QQ0
	212,55	187120BL0
	212,55	187120BG0
	212,55	187120BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905

1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adaptor
others – black cable/adaptor

⏸ IP20

	CHF	CODE
	303,60	187220WW0
	303,60	187220GG0
	303,60	187220QQ0
	303,60	187220BL0
	303,60	187220BG0
	303,60	187220BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adaptor
others – black cable/adaptor

⏸ IP20

	CHF	CODE
	213,90	187320WW0
	213,90	187320GG0
	213,90	187320QQ0
	213,90	187320BL0
	213,90	187320BG0
	213,90	187320BB0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905

back

WEVER & DUCRÉ 378 — 379



ODREY on track

1-Phase

1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CHF	CODE
WW	223,60	187420WW0
GG	223,60	187420GG0
QQ	223,60	187420QQ0
BL	223,60	187420BL0
BG	223,60	187420BG0
BB	223,60	187420BB0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CHF	CODE
WW	227,70	187520WW0
GG	227,70	187520GG0
QQ	227,70	187520QQ0
BL	227,70	187520BL0
BG	227,70	187520BG0
BB	227,70	187520BB0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	CHF	CODE
WW	229,10	187620WW0
GG	229,10	187620GG0
QQ	229,10	187620QQ0
BL	229,10	187620BL0
BG	229,10	187620BG0
BB	229,10	187620BB0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

optional inner cover on page 910

back


WEVER & DUCRÉ 380 – 381



RUVI on track

1-Phase

147



1.0


G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter



	CHF	CODE
	135,25	1672E0W0
	135,25	1672E0M0
	135,25	1672E0Q0
	135,25	1672E0B0

OPTIONAL

	CHF	CODE
G95 10W E27 phase-cut dim opal		
2700K 1060lm	45,55	9003E163







3-PHASE TRACKS

220-240V *tracks* / *accessories*

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

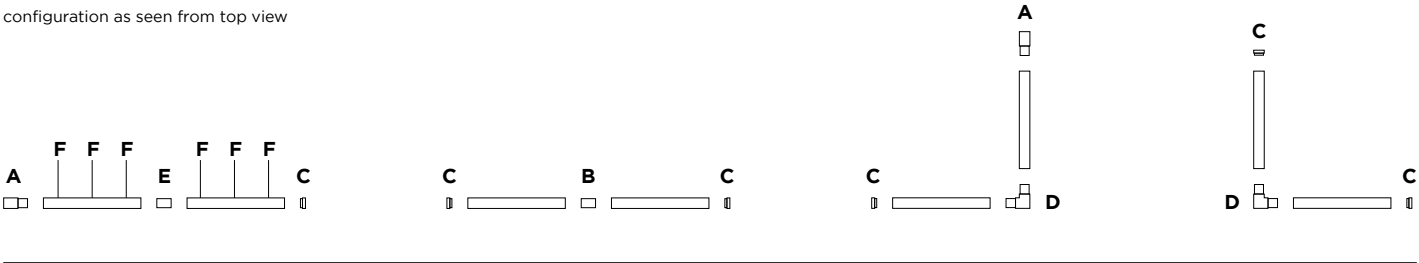

TRACK PROFILE

surface | suspended | DALI
220-240V | 16A

⊕ DALI FELV

		CHF	CODE
	1m	67,65	90014200
	1m	67,65	90014201

	2m	133,90	90014202
	2m	133,90	90014203

	3m	202,90	90014204
	3m	202,90	90014205




F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		CHF	CODE
	max. 1.5m	40,05	90014206
	max. 1.5m	40,05	90014207

	max. 3m	41,40	90014208
	max. 3m	41,40	90014209


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CHF	CODE
	31,75	90014240
	31,75	90014241



A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CHF	CODE
	31,75	90014238
	31,75	90014239



B | MIDDLE FEED


straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CHF	CODE
	70,40	90014224
	70,40	90014225



C | END CAP LEFT/RIGHT


	CHF	CODE
	4,15	90014216
	4,15	90014217



D | L-FEED 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CHF	CODE
	66,25	90014220
	66,25	90014221



D | L-FEED 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CHF	CODE
	66,25	90014222
	66,25	90014223



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A


	CHF	CODE
	22,10	90014226
	22,10	90014227



TRACK COVER

		CHF	CODE
	1m	40,05	90014236
	1m	40,05	90014237

more 3-phase track accessories on
page 919

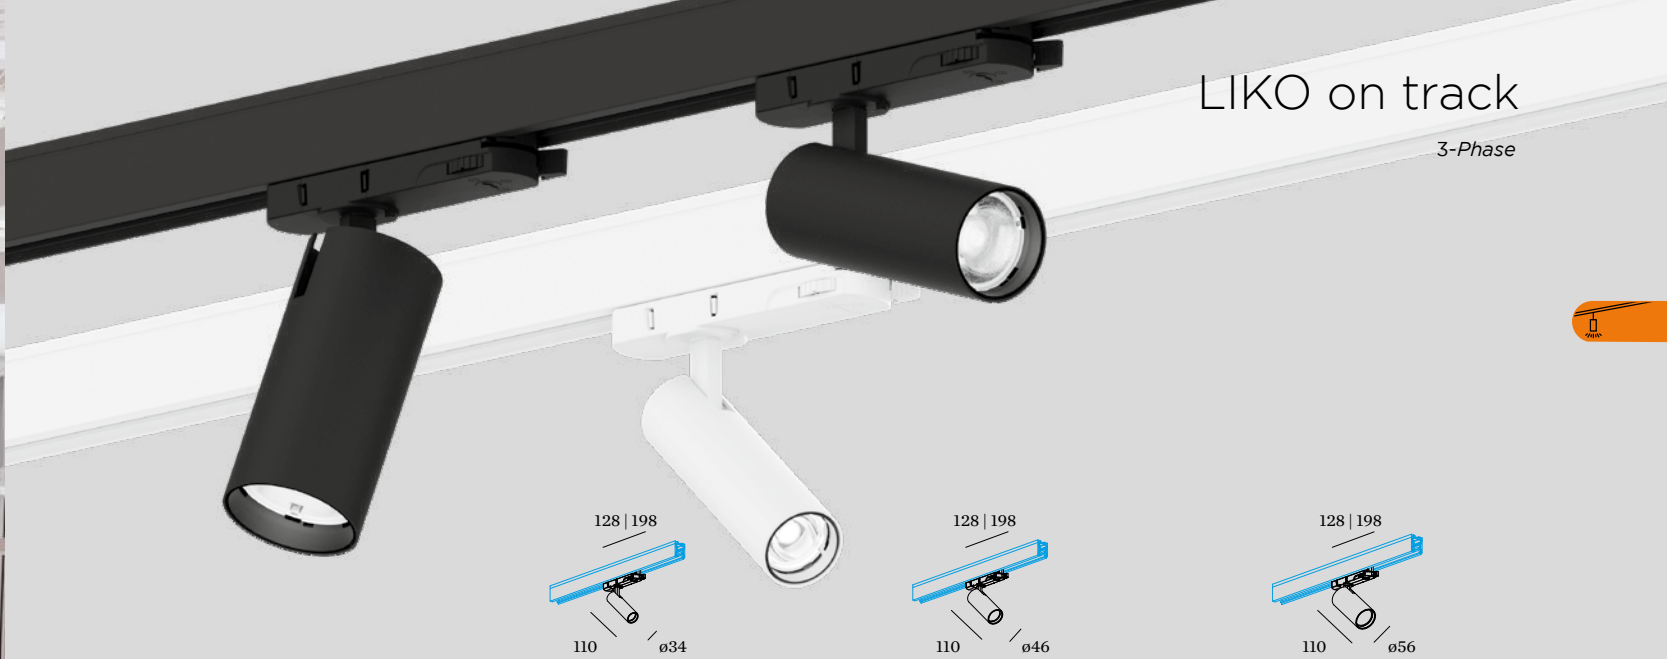

LIKO on track

3-Phase



1.0

LED COB 12W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0-90°|360° ∠ M-30° L80|50K

non-dim

	CHF	CODE
	190,45	263152W_
	190,45	263152B_

DALI-2

	CHF	CODE
	241,50	263155W_
	241,50	263155B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1070 >90	3
3000K	1110 >90	5

OPTIONAL

honeycomb louver

	CHF	CODE
	20,05	915231B0

2.0

LED COB 14W | ≤115lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0-90°|360° ∠ M-27° L80|50K

non-dim

	CHF	CODE
	218,05	263252W_
	218,05	263252B_

DALI-2

	CHF	CODE
	269,10	263255W_
	269,10	263255B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1565 >90	3
3000K	1600 >90	5

OPTIONAL

honeycomb louver

	CHF	CODE
	22,10	915232B0

3.0

LED COB 18W | ≤120lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0-90°|360° ∠ M-27° L80|50K

non-dim

	CHF	CODE
	241,50	263352W_
	241,50	263352B_

DALI-2

	CHF	CODE
	282,90	263355W_
	282,90	263355B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2110 >90	3
3000K	2175 >90	5

OPTIONAL

honeycomb louver

	CHF	CODE
	24,15	915233B0



MORE VERSIONS ONLINE
weverducre.com/more-liko





SQUBE on track

3-Phase

205

70

77

ø55

70

90

ø65

70

110

ø80

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕

IP20

0-90°|355°

	CHF	CODE
	150,45	144720W0
	150,45	144720B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕

IP20

0-90°|355°

M-32°

L70|55K

	CHF	CODE
	295,35	144368W_
	295,35	144368B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	925 >90	3
3000K	960 >90	5
1800K-3000K	645 >90	9

3.0 LED

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕

IP20

0-90°|355°

M-27°

L70|55K

	CHF	CODE
	314,65	144558W_
	314,65	144558B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1400 >90	3
3000K	1480 >90	5

black ring LED

PAR16

back


WEVER & DUCRÉ

388 — 389



HEXO mini | RAY mini on track

3-Phase



HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter




3.0	CHF	CODE
300mm		
	190,45	259520M0
	190,45	259520Q0
	190,45	259520B0

5.0	CHF	CODE
500mm		
	218,05	259620M0
	218,05	259620Q0
	218,05	259620B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim	CHF	CODE
2700K 225lm	20,05	901128B3
3000K 235lm	20,05	901128B5



RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter
W and LS – white cable/adapter
others – black cable/adapter




3.0	CHF	CODE
300mm		
	180,80	260520W0
	180,80	260520LS0
	180,80	260520Q0
	180,80	260520B0

5.0	CHF	CODE
500mm		
	208,40	260620W0
	208,40	260620LS0
	208,40	260620Q0
	208,40	260620B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim	CHF	CODE
2700K 240lm	20,05	901128W3
2700K 225lm	20,05	901128B3
3000K 255lm	20,05	901128W5
3000K 235lm	20,05	901128B5



back



HEXO | RAY on track

HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

⏻ ⊕ IP20

3.0	300mm	CHF	CODE
		167,00	215420G0
		167,00	215420Q0
		167,00	215420P0
		164,25	215420B0

RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter
W fixtures – white cable/adapter
others – black cable/adapter

⏻ ⊕ IP20

2.0	200mm	CHF	CODE
		140,80	217320W0
		150,45	217320G0
		150,45	217320M0
		150,45	217320Q0
		150,45	217320P0
		140,80	217320B0

3.0	300mm	CHF	CODE
		149,05	217420W0
		158,70	217420G0
		158,70	217420M0
		158,70	217420Q0
		158,70	217420P0
		149,05	217420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 440lm	22,80	901228B3
3000K 460lm	22,80	901228B5

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

back

WEVER & DUCRÉ 392 — 393



ROOMOR OFFICE on track

3-Phase



293



499




1.0 MICROPRISMATIC

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium
microprismatic PMMA cover
3-phase track adapter incl. driver

□ IP20 L80/60K UGR ≤ 19

	CHF	CODE
	1028,10	1684M5W_
	1028,10	1684M5B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	3660 >90	5
4000K	3660 >90	7



1.0 OPAL

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium | opal PMMA cover
3-phase track adapter incl. driver


□ IP20 L80/60K

	CHF	CODE
	1000,50	168485W_
	1000,50	168485B_


LIGHT COLOUR	LUMEN CRI	CODE
3000K	3700 >90	5
4000K	3700 >90	7

QUBBY SYSTEM

Ceiling suspended

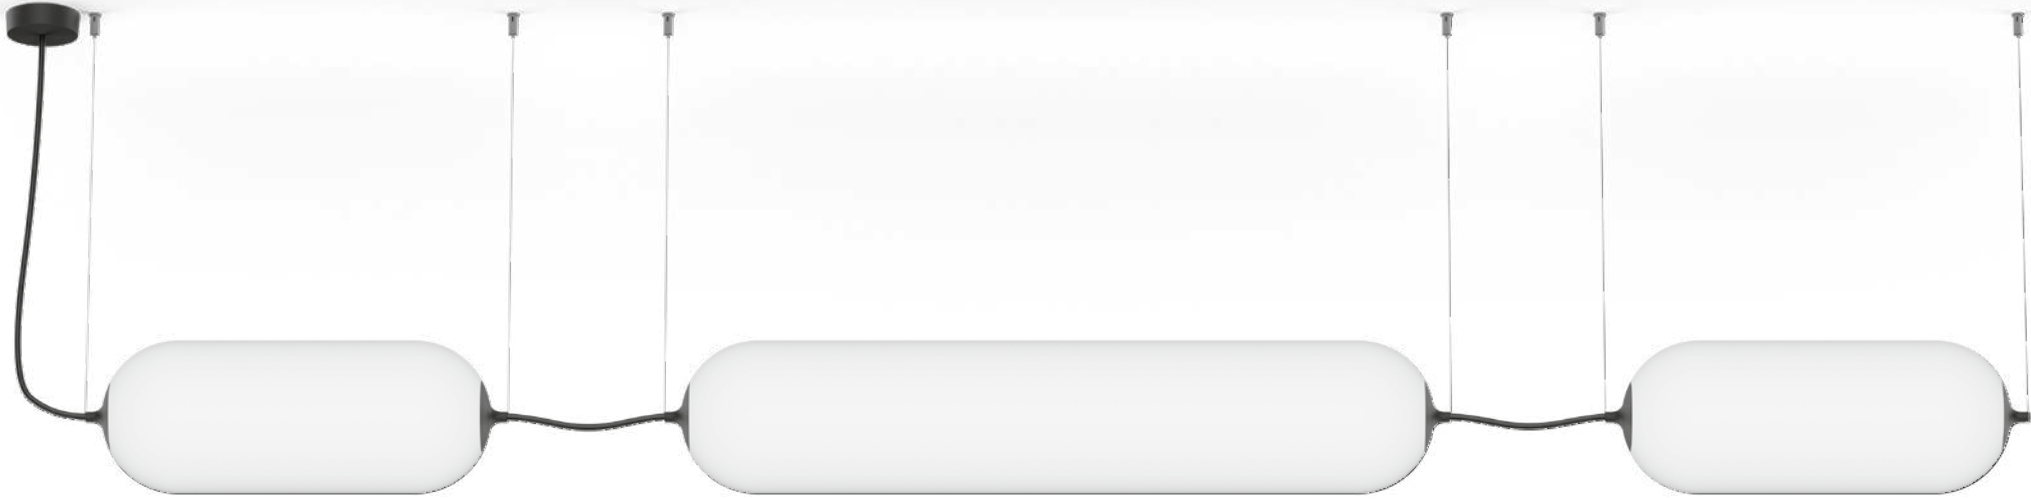

459




1.0

LED PCB 16W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

⊕ IP20 L80/100K

2700K-5000K CRI >90 1250lm	
CHF	CODE
959,10	916215B9




2.0

LED PCB 22W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

⊕ IP20 L80/100K

2700K-5000K CRI >90 2500lm	
CHF	CODE
1290,30	916225B9



3.0

LED PCB 35W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K



⊕ IP20 L80/100K

2700K-5000K CRI >90 4500lm	
CHF	CODE
2063,10	916235B9

B | BASE
W/H ø97x28
polypropylene

	CHF	CODE
	62,10	914231B0

CONNECTOR
included in **1.0 | 2.0 | 3.0**

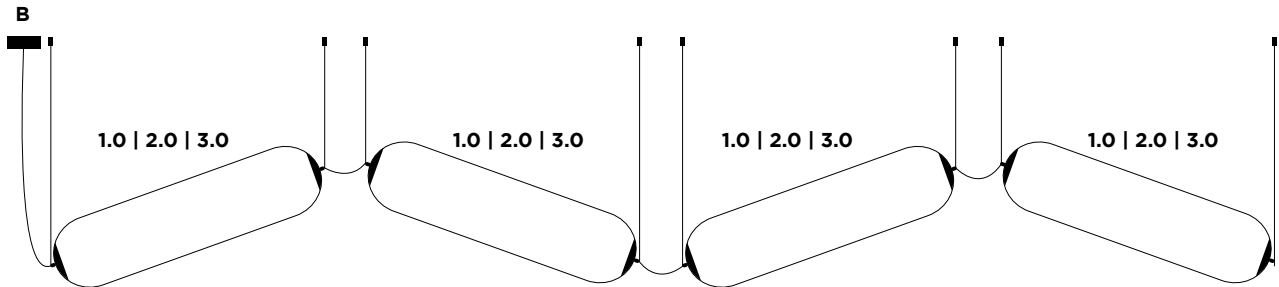


1.0 | 2.0 | 3.0
B


Luminaire
Base

KEEP IN MIND WHEN PLANNING YOUR SYSTEM
Please be aware that the maximum length of the QUBBY System cannot be longer then 80m or max. 40 luminaires.


S&R CORNELISSEN



back

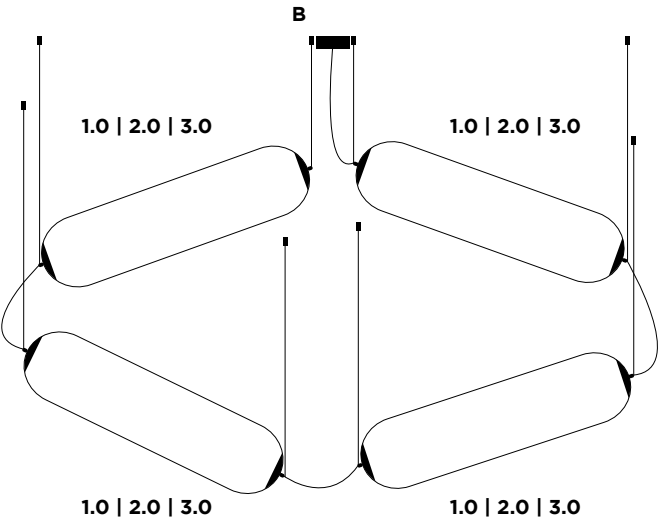



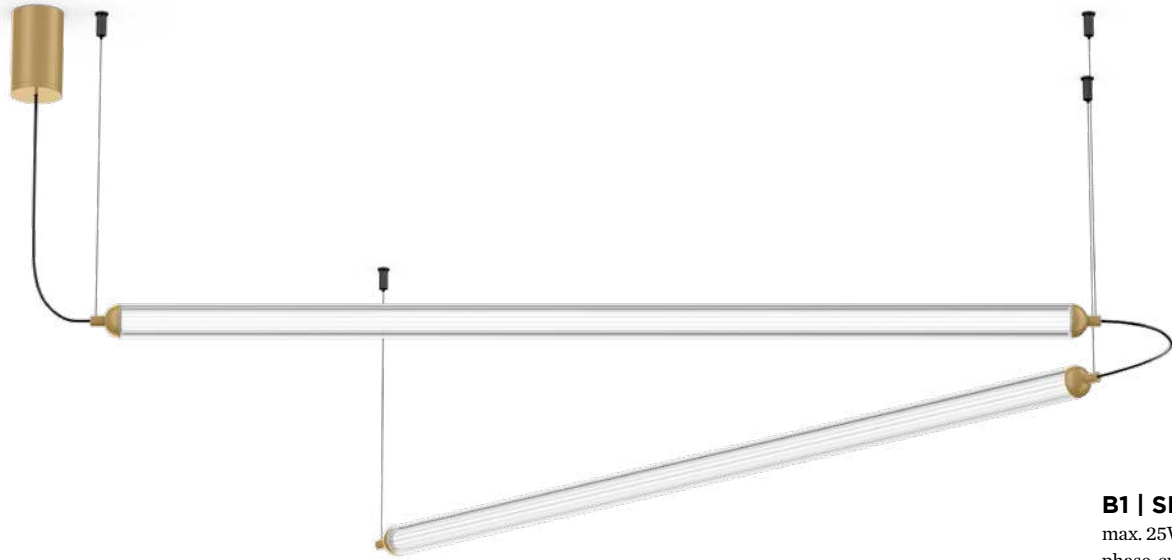

B1 | SINGLE/MULTI BASE

max. 25W | const. volt. | 24V
phase-cut dim | W/H ø62x102
polycarbonate

	CHF	CODE
	75,90	914224M0
	75,90	914224B0

B2 | MULTI BASE

max. 50W | const. volt. | 24V
phase-cut dim | W/H ø200x38
polycarbonate

	CHF	CODE
	103,50	914225M0
	103,50	914225B0

C | CABLE CONNECTOR

cable from one luminaire to another
incl. plugs

	CHF	CODE
 0.3m	20,05	915210B0
 0.6m	26,25	915211B0
 0.9m	31,75	915212B0
 1.2m	37,30	915213B0

D | FIX CONNECTOR

electrical | mechanical | straight
central suspension

	CHF	CODE
	33,15	915221B0

1.0

LED strip 8W
aluminium | ribbed glass

 IP20 L80|50K

	CHF	CODE
	386,40	269182M_
	386,40	269182B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1035 >90	3
3000K	1065 >90	5

2.0

LED strip 12W
aluminium | ribbed glass

 IP20 L80|50K

	CHF	CODE
	469,20	269282M_
	469,20	269282B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1555 >90	3
3000K	1600 >90	5

3.0

LED strip 15W
aluminium | ribbed glass



 IP20 L80|50K

	CHF	CODE
	565,80	269382M_
	565,80	269382B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2070 >90	3
3000K	2130 >90	5

FLYRA SYSTEM

Ceiling suspended

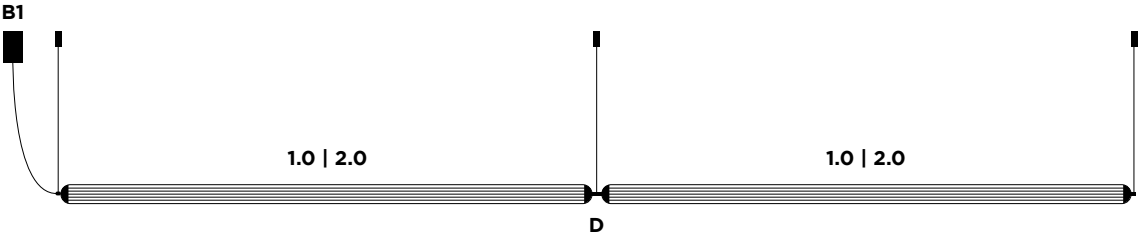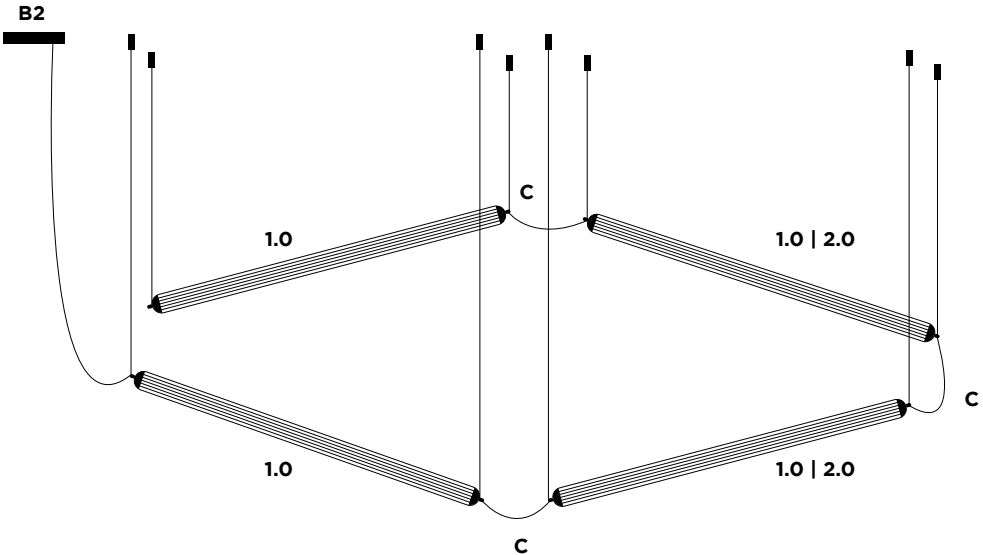


- 1.0 | 2.0 | 3.0** Luminaire
B1 Single/Multi Base
B2 Multi Base
C Cable connector
D Fix connector

KEEP IN MIND WHEN PLANNING YOUR SYSTEM


Please be aware that the maximum wattage of the FLYRA System cannot be higher than 25W for B1 and 50W for B2 per System.



weverducre.com/flyra

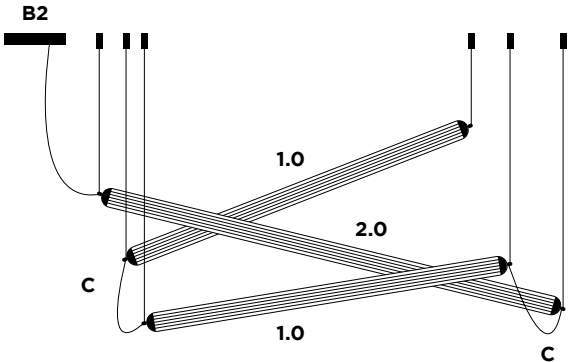





B | CONNECTOR POINT

phase-cut dim up to max. 4 fixtures
DALI up to max. 2 fixtures

	CHF	CODE
	71,80	900190W1
	71,80	900190B1

C | STEEL SUSPENSION CABLE

	CHF	CODE
2.0m	17,95	90015102

1.0

LED PCB | dimmable
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⚡ IP20 L80|50K

phase-cut dim | 20W
3000K | CRI >90 | 1090lm

	CHF	CODE
	499,60	500384W5
	499,60	500384B5

DALI-2 | 22W | incl. driver
3000K | CRI >90 | 1090lm

	CHF	CODE
	568,60	500385W5
	568,60	500385B5

D1 | POWER FEEDER

for phase-cut dim | incl. steel
suspension cable 2.0m | max. 10
luminaires per power feeder

	CHF	CODE
	85,60	90018010
	85,60	90018011


D2 | POWER FEEDER

for DALI | incl. steel suspension cable
2.0m | max. 10 luminaires per power
feeder

	CHF	CODE
	107,65	90018012
	107,65	90018013


SURFACE EXAMPLES


configuration as seen from top view | minimum angle 45°

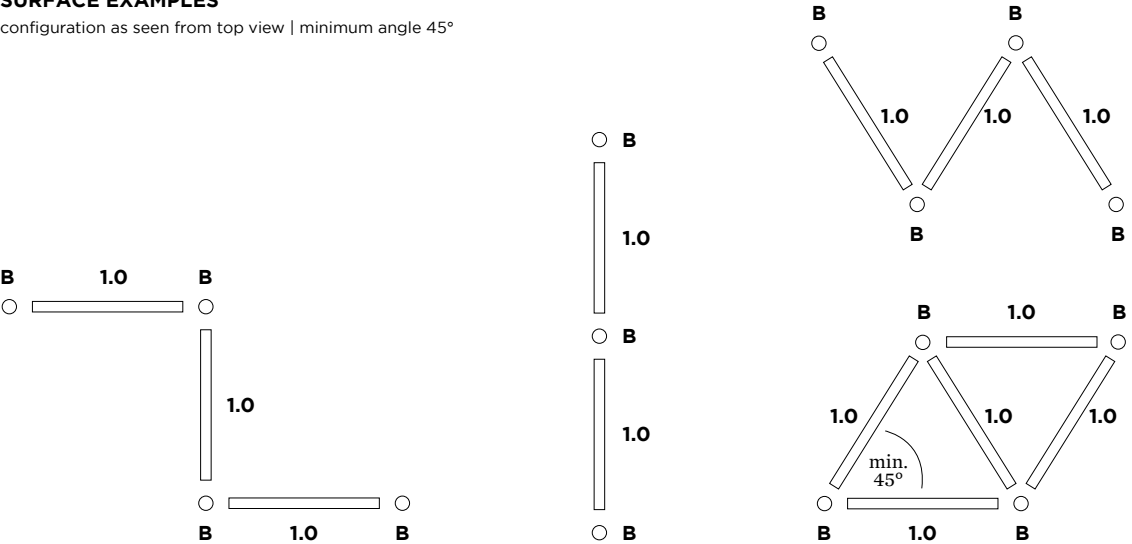

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

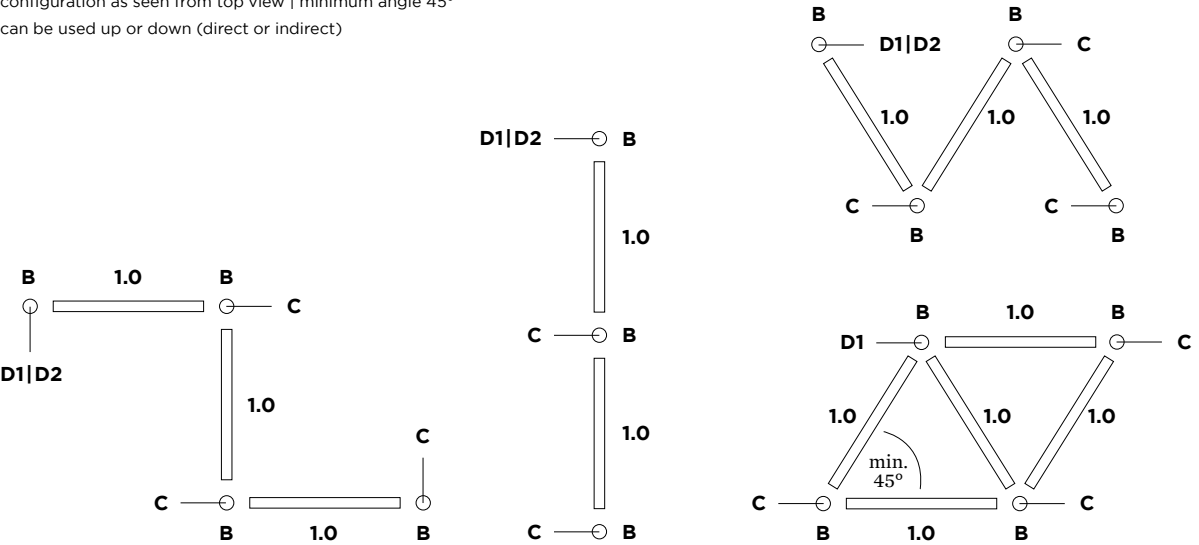

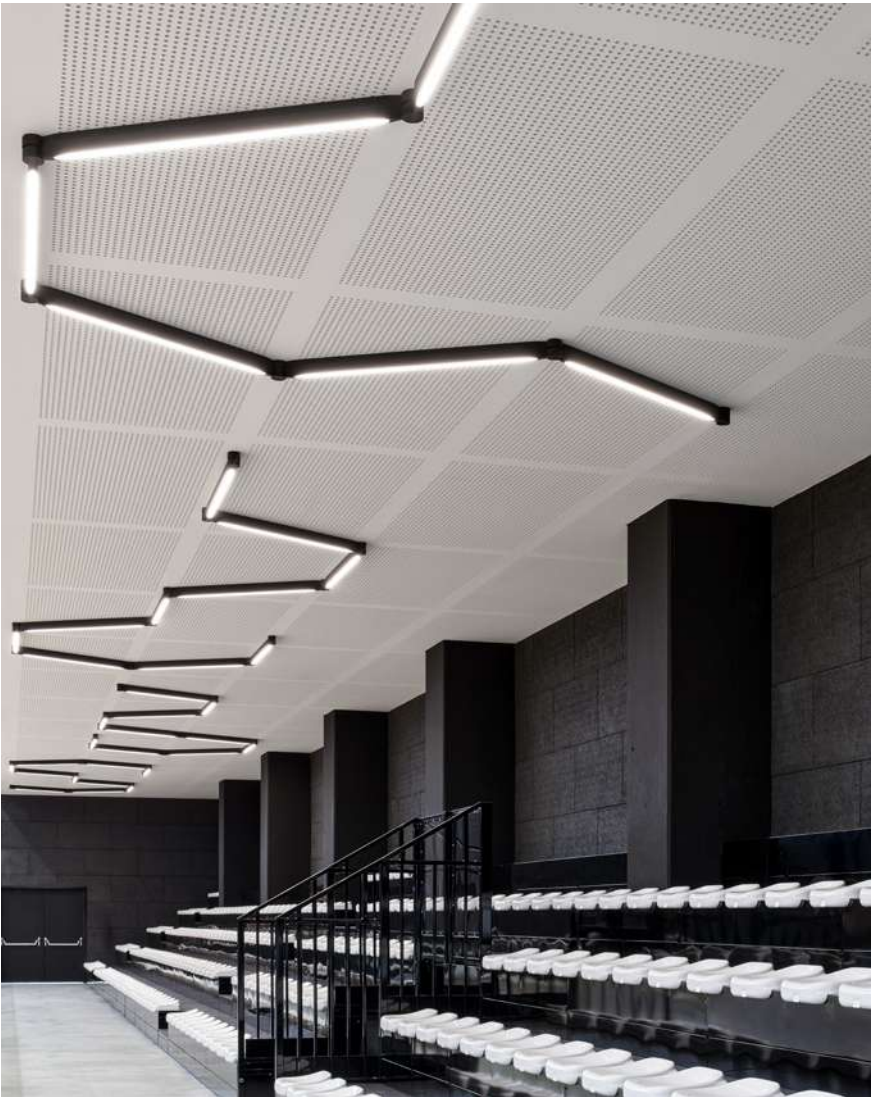


MATE SPORT HALL | IBL LIGHT & DESIGN THIENE | ITALY

Ceiling surface



2.0 PROFILE

	CHF	CODE
2m	40,05	911991W2
2m	40,05	911991B2
3m	63,50	911991W3
3m	63,50	911991B3



		CHF	CODE
	2m	60,75	911992W2
	2m	60,75	911992B2
	3m	85,60	911992W3
	3m	85,60	911992B3

ALWAYS USE

ALWAYS USE

		CHF	CODE
20W	2m	53,15	9003S2L
30W	3m	78,70	9003S3L
50W	5m	132,50	9003S4L

		CHF	CODE
20W	2m	53,15	9003S21
30W	3m	78,70	9003S31
50W	5m	132,50	9003S41

	CHF	CODE
30W 2m	78,70	9003S22_
45W 3m	106,30	9003S32_
75W 5m	186,30	9003S42_

		CHF	CODE
30W 2m		78,70	9003S22_
45W 3m		106,30	9003S32_
75W 5m		186,30	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CHF	CODE
35W	58,00	90212801
100W	101,85	90212902
25W dim	63,50	90222701
50W dim	93,85	90222901

driver | 24V

	CHF	CODE
35W	58,00	90212801
100W	101,85	90212902
25W dim	63,50	90222701
50W dim	93,85	90222901

specs on page 901

OPTIONAL


Black diffuser | only for 1.0

	CHF	CODE
2m	19,35	911902B1
3m	29,00	911903B1




Double side tape for profile fixation

	CHF	CODE
3m	21,40	90019199

more accessories on page 916



for net output of LED strip on profiles,
check weverducre.com/ilane

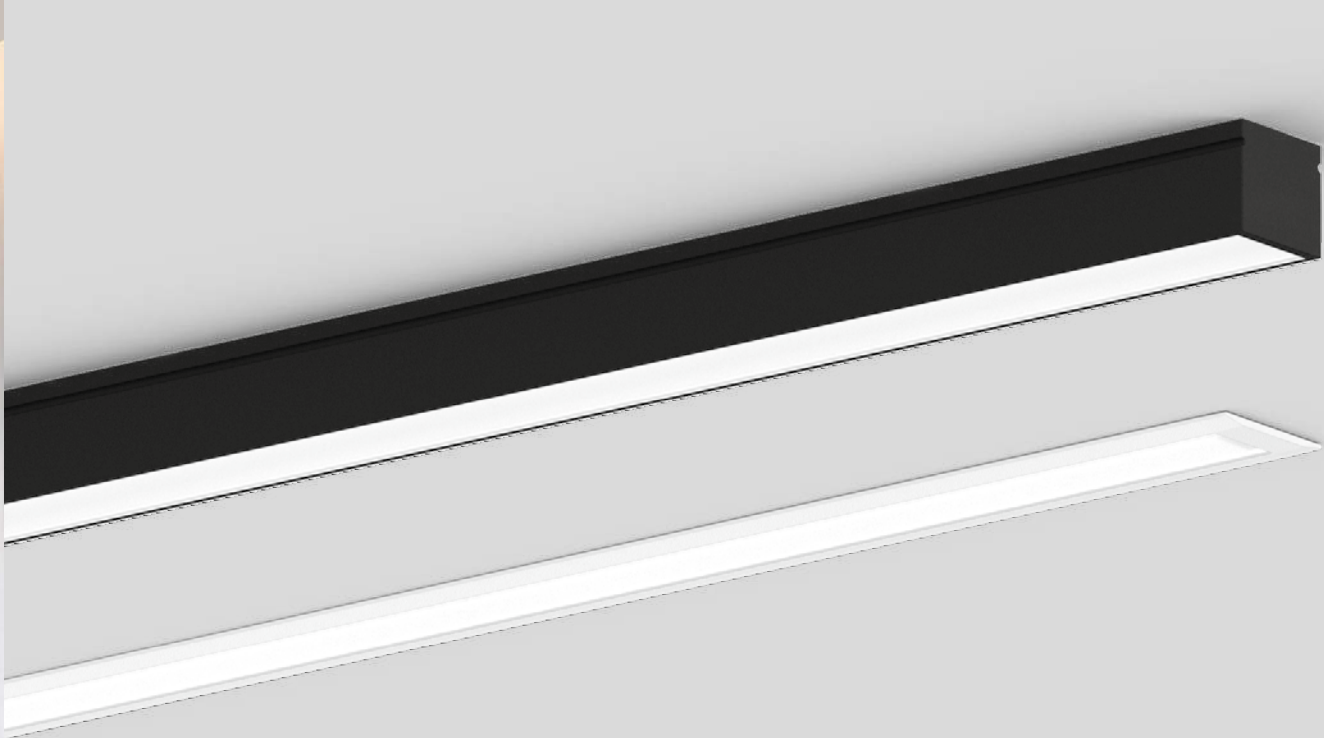

for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 3.0

	CHF	CODE
2m	23,50	911912B1
3m	31,75	911913B1


Double side tape for profile fixation

	CHF	CODE
3m	21,40	90019199

more accessories on page 916

3.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		CHF	CODE
	2m	63,50	911993W2
	2m	63,50	911993B2
	3m	92,50	911993W3
	3m	92,50	911993B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

		CHF	CODE
20W	2m	53,15	9003S21_
30W	3m	78,70	9003S31_
50W	5m	132,50	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

		CHF	CODE
30W	2m	78,70	9003S22_
45W	3m	106,30	9003S32_
75W	5m	186,30	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5


driver | 24V

	CHF	CODE
35W	58,00	90212801
100W	101,85	90212902
25W dim	63,50	90222701
50W dim	93,85	90222901

specs on page 901

4.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		CHF	CODE
	2m	80,05	911994W2
	2m	80,05	911994B2
	3m	104,90	911994W3
	3m	104,90	911994B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

		CHF	CODE
20W	2m	53,15	9003S21_
30W	3m	78,70	9003S31_
50W	5m	132,50	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

		CHF	CODE
30W	2m	78,70	9003S22_
45W	3m	106,30	9003S32_
75W	5m	186,30	9003S42_


LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V


	CHF	CODE
35W	58,00	90212801
100W	101,85	90212902
25W dim	63,50	90222701
50W dim	93,85	90222901

specs on page 901

SINGLE LUMINAIRES



MATCH LUSTA
415



TRACE CHANDELIER
417



NET
421



FINELLE
423



FLYRA
427



FINLIN
433



STUDO
437



FIL
441



DARF
445



SHEDDA
449



SHEDDA FRACTAL
451



KUJO
453



OPLIA CHANDELIER
457



QUBBY
459



GIGANT
461

SINGLE SUSPENSIONS



CONE
463



DRO
465



MIRRO
467



MIRRO SOFT
471



SPIRRA SOFT
475



WAVE SOFT
477



J.J.W.
479



WIRO
489



ROOMOR
495



ROOMOR OFFICE
499

CHOOSE YOUR BASE

LV more infos
on p. 500



COZY CONE
503



HEXO MINI
505



RAY MINI
507



MATCH
509



TRACE
511



ODREY
517



OPLIA
521



SOLLI
523



SOLLI COCOON
525



HEXO MINI
531



HEXO
533



RAY MINI
535



RAY
537



ODREY
539



TRACE 2.0
547



WETRO
549



CLEA
557



SHIEK
561





DINOR
563



MATCH LUSTA

Ceiling suspended 61 | 137 | 153

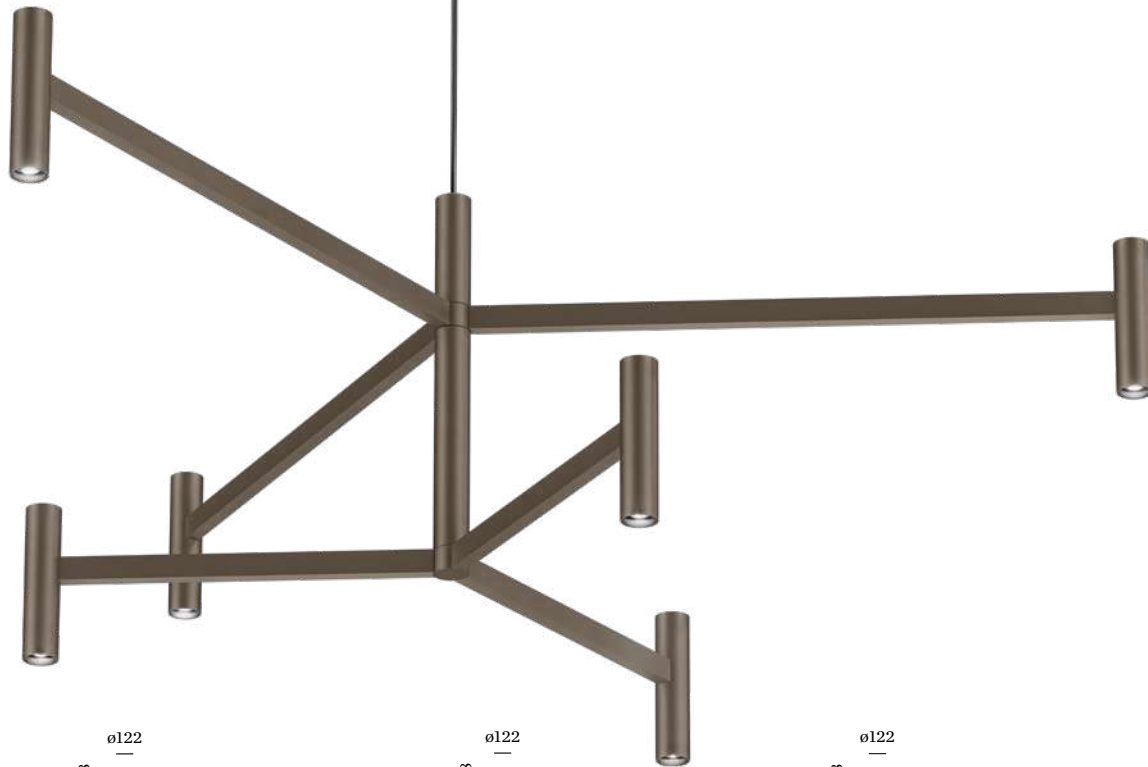


1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30° L80|50K

	CHF	CODE
	703,80	280154M3
	703,80	280154Q3
	669,30	280154B3




2.1

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30° L80|50K

	CHF	CODE
	1138,50	280254M3
	1138,50	280254Q3
	1090,20	280254B3




3.2

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30° L80|50K

	CHF	CODE
	1228,20	280354M3
	1228,20	280354Q3
	1166,10	280354B3




3.2.1

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 $\hat{A}$ M-30° L80|50K

	CHF	CODE
	1711,20	280454M3
	1711,20	280454Q3
	1587,00	280454B3





PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN




DESIGN
AWARD
2024



reddot winner 2023

TRACE CHANDELIER

Ceiling suspended

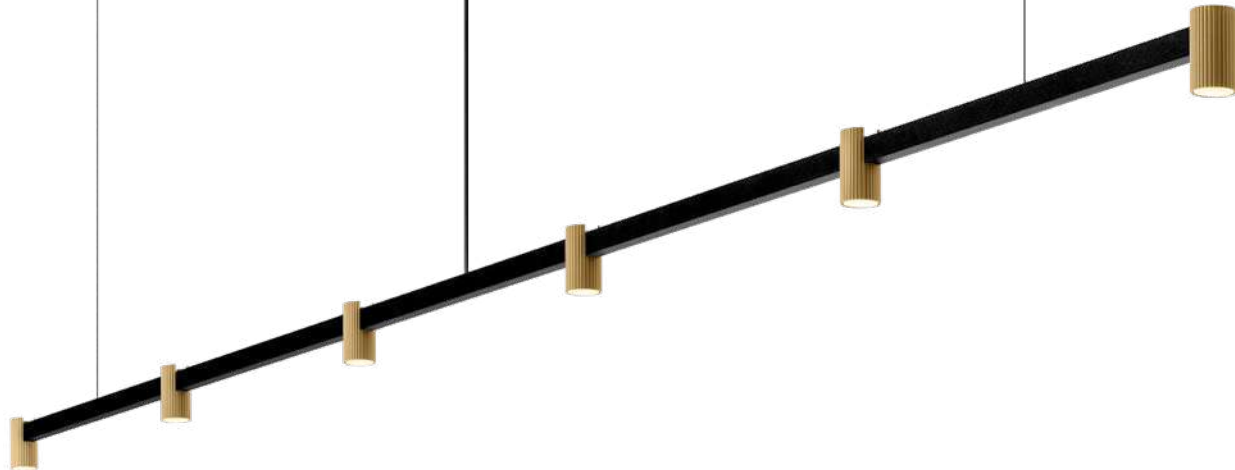


261 | 269 | 273



351



593 | 595




1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

☐ IP20 ⚡ M-30° L80|50K

	CHF	CODE
	683,10	253564CH_
	683,10	253564B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x170 >90	3
3000K	4x180 >90	5




2.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

☐ IP20 ⚡ M-30° L80|50K

	CHF	CODE
	917,70	253664CH_
	917,70	253664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x180 >90	3
3000K	6x190 >90	5




3.0

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

☐ IP20 ⚡ M-30° L80|50K

	CHF	CODE
	1138,50	253764CH_
	1138,50	253764B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	8x215 >90	3
3000K	8x225 >90	5






RESTAURANT L'APERICENA TIME | ARCH. LEONARDO PORCELLI - STILEMI RIVAROLO CANAVESE | ITALY






PRIVATE RESIDENCE | SOFIE CHRISTIAENS BELGIUM

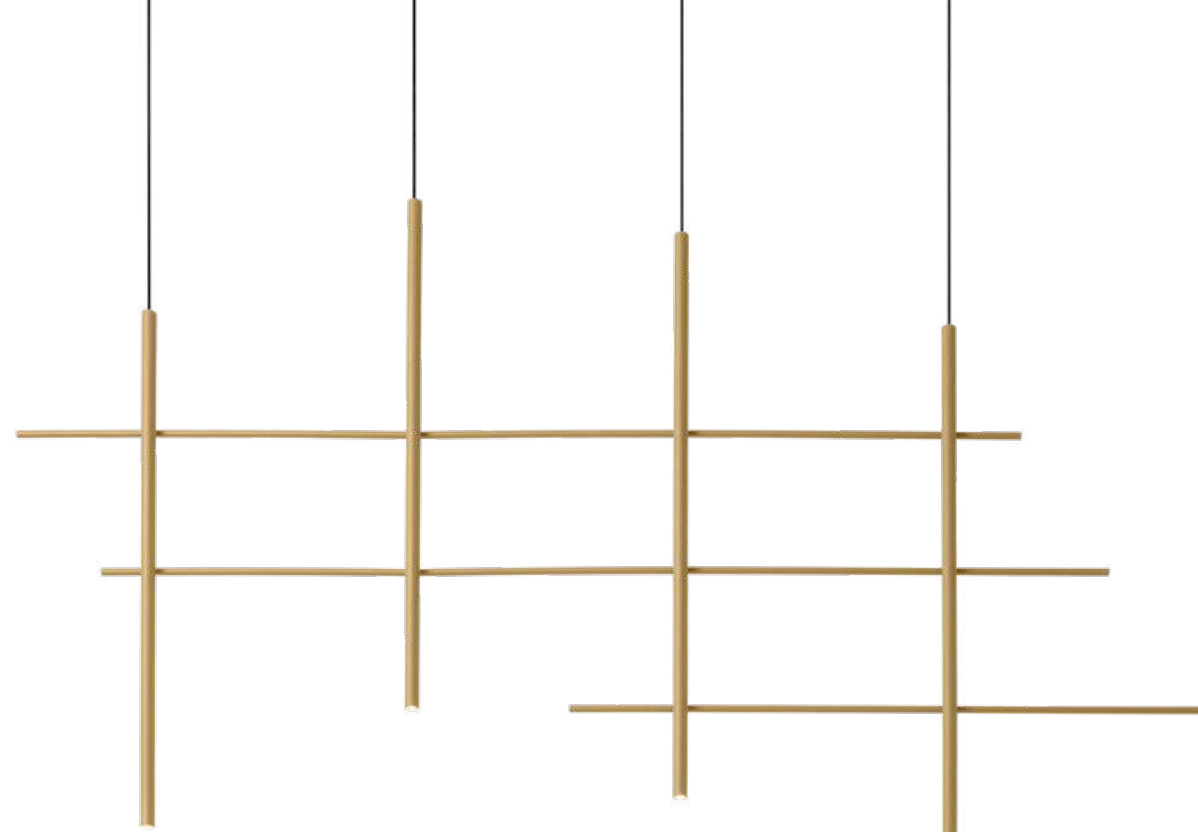

NET

Ceiling suspended




2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 Δ W-85° L80|50K

2700K | CRI >90 | 2x235lm

	CHF	CODE
	641,70	231264W3
	641,70	231264M3
	641,70	231264B3



4.0

LED PCB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 Δ W-85° L80|50K


2700K | CRI >90 | 4x235lm

	CHF	CODE
	1228,20	231464W3
	1228,20	231464M3
	1228,20	231464B3



FINELLE

Ceiling suspended




1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80/100K



2700K CRI >90 1040lm			
		CHF	CODE
		683,10	272184M3
		683,10	272184B3

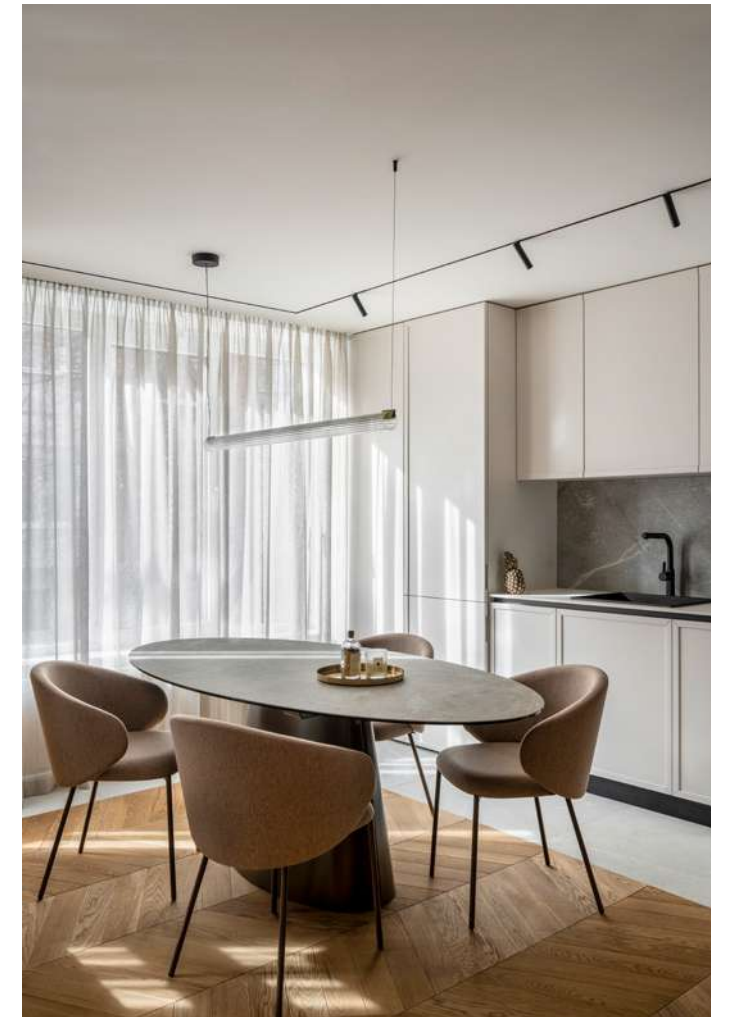

PRIVATE RESIDENCE | EN-TRE STUDIO BULGARIA



DALI on request

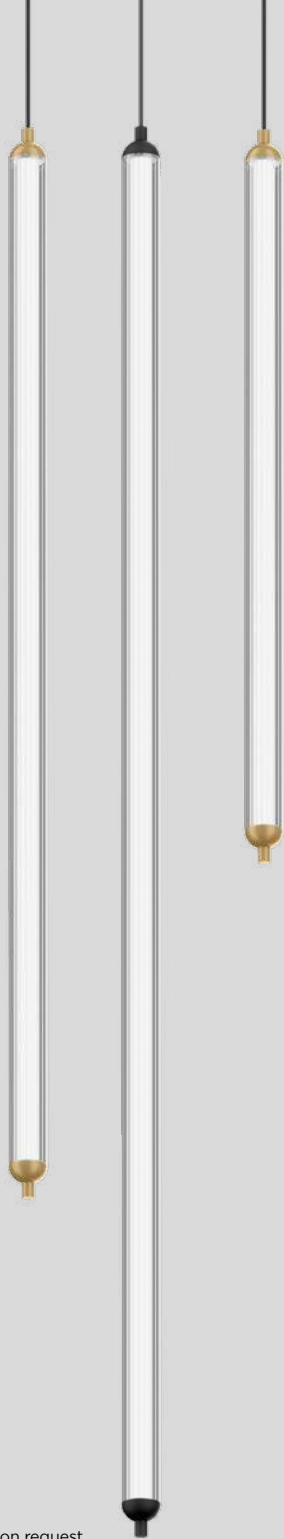


1.1 VERTICAL

LED strip 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	448,50	249184M_
	448,50	249184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	730 >90	5




1.2 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	545,10	249284M_
	545,10	249284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1065 >90	3
3000K	1095 >90	5



1.3 VERTICAL

LED strip 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	641,70	249384M_
	641,70	249384B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1420 >90	3
3000K	1460 >90	5

FLYRA



Ceiling suspended



401



back

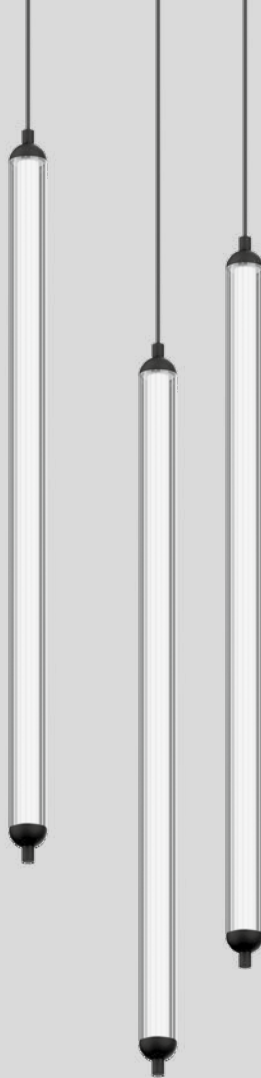


3.1 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	1573,20	449184BM_
	1573,20	449184BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	965 >90	3
3000K	995 >90	5




3.3 VERTICAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	1863,00	449284BM_
	1863,00	449284BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1450 >90	3
3000K	1490 >90	5



6.3 VERTICAL

LED strip 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	3270,60	449384BM_
	3270,60	449384BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2900 >90	3
3000K	2985 >90	5

FLYRA

Ceiling suspended



401








FLYRA

Ceiling suspended



401



1.1 HORIZONTAL

LED strip 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	462,30	269184M_
	462,30	269184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	730 >90	5

1.2 HORIZONTAL

LED strip 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	545,10	269284M_
	545,10	269284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1065 >90	3
3000K	1095 >90	5

1.3 HORIZONTAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP20 L80|50K

	CHF	CODE
	641,70	269384M_
	641,70	269384B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1420 >90	3
3000K	1460 >90	5

DALI on request



back



FINLIN

Ceiling suspended




263



673 | 679



727



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CHF	CODE
2.5m	345,00	270184CH_
2.5m	345,00	270184B_
10m	386,40	270484B5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	485 >90	5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CHF	CODE
2.5m	358,80	270284CH_
2.5m	358,80	270284B_
10m	400,20	270584B5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	675 >90	3
3000K	730 >90	5

3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser


⊕ IP20 L80|50K

	CHF	CODE
2.5m	407,10	270384CH_
2.5m	407,10	270384B_
10m	448,50	270684B5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	900 >90	3
3000K	975 >90	5

OPTIONAL

cover plate adapter for concrete housing	CHF	CODE
17,25	17,25	900194B0





back

studo

STUDO HELPS YOU OUT

STUDO zeigt, wie vielseitig eine Leuchte sein kann: Fünf verschiedene Abhängungen machen die ultraschlanke Pendelleuchte zum flexiblen Allrounder. Ihr Aluminiumprofil mit leistungsstarkem Reflektor und flachem Textilkabel sorgt für eine klare, minimalistische Optik – perfekt für Büro oder Küche.


STUDO démontre la polyvalence d'un luminaire : cinq options de suspension font de cette suspension ultra-fine un véritable atout flexible. Son profil en aluminium avec réflecteur performant et câble textile plat crée un look épuré et minimaliste – parfait pour le bureau ou la cuisine.

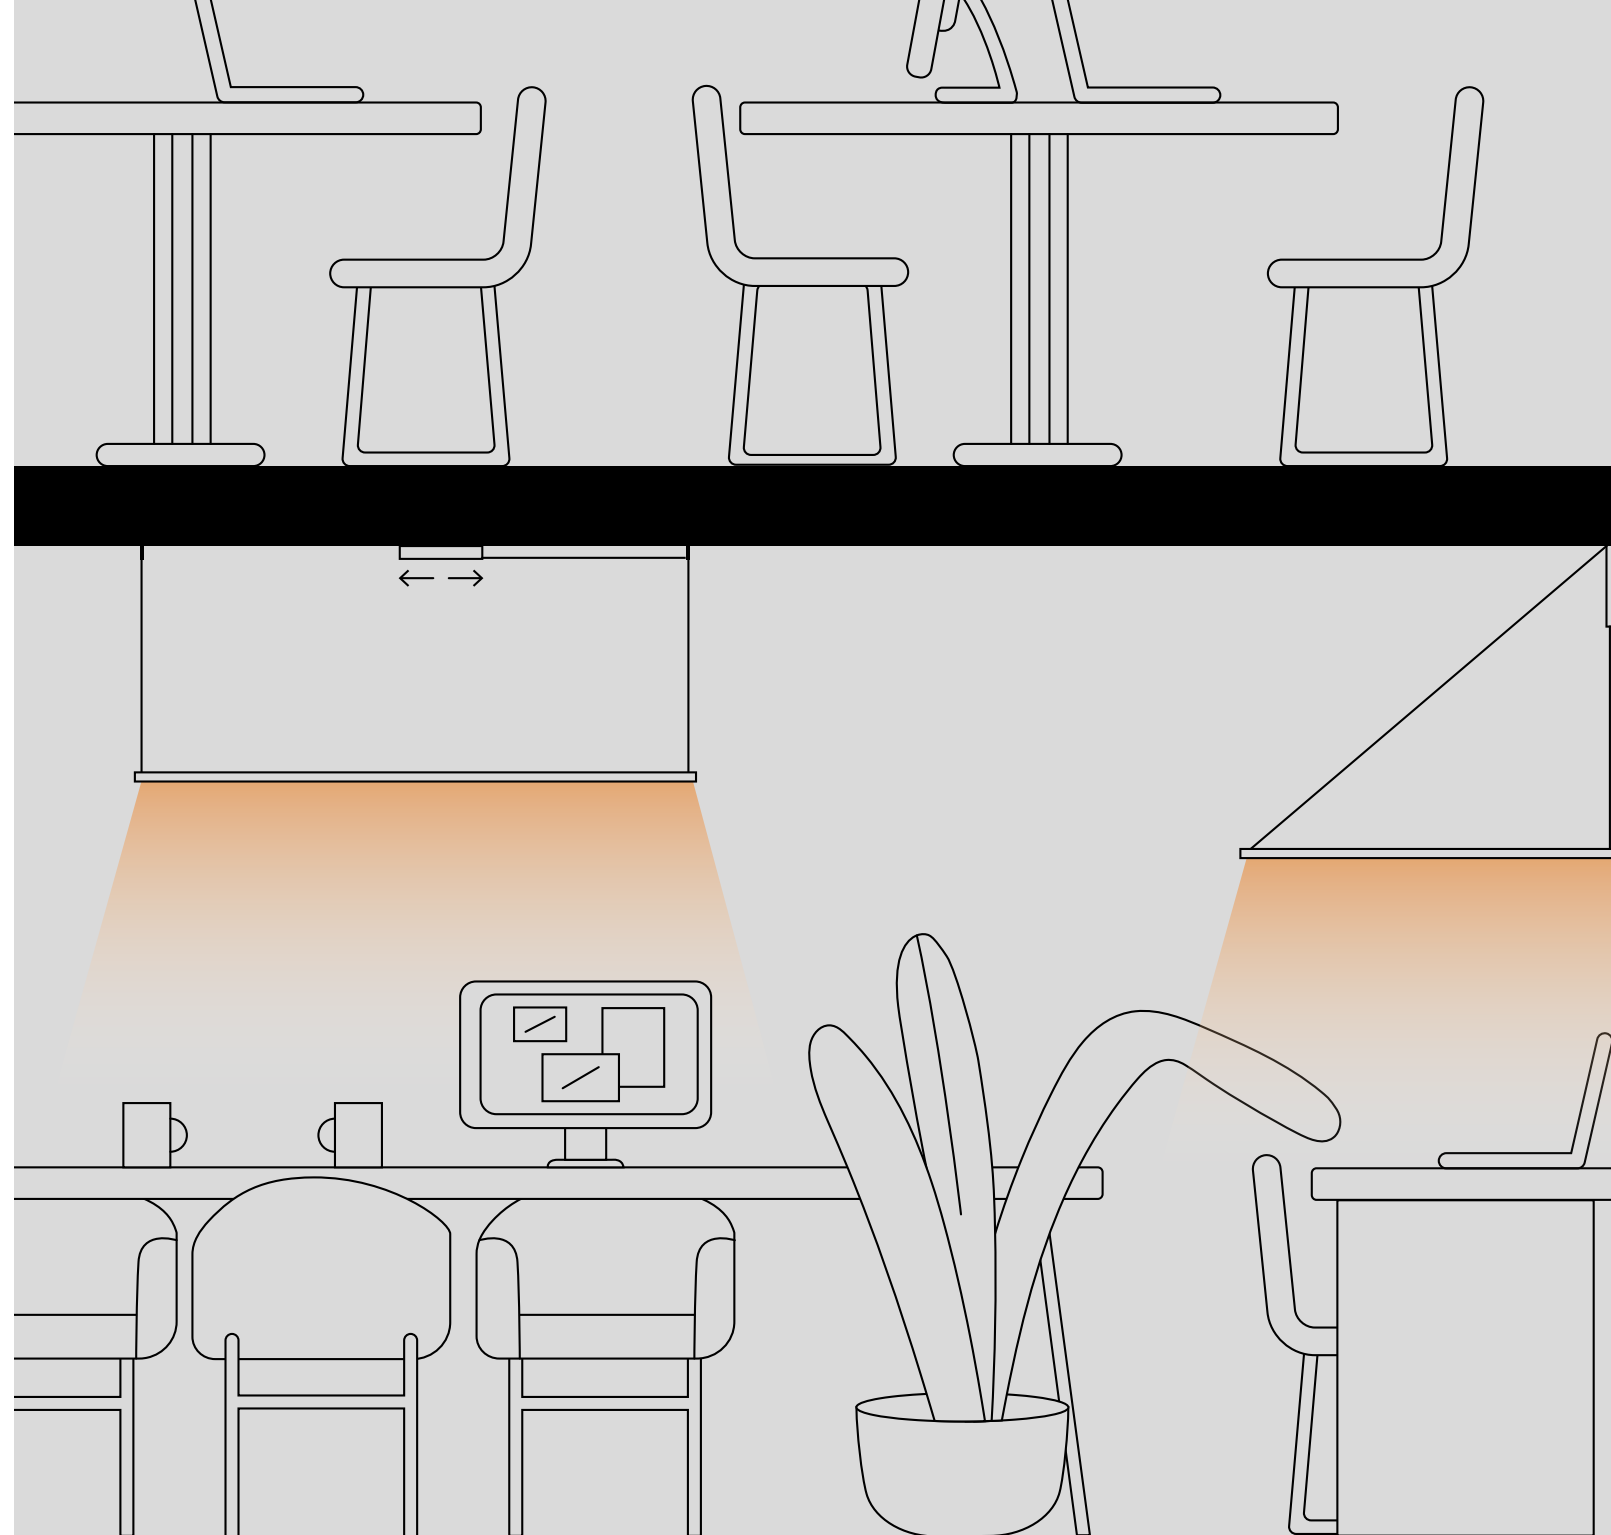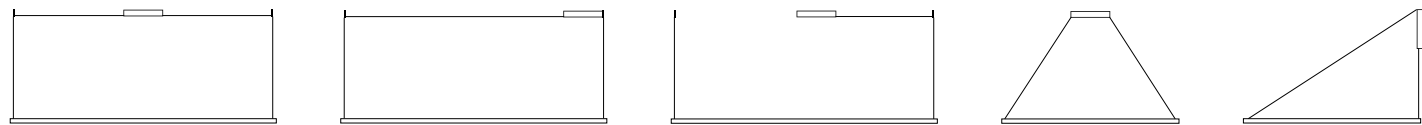



STUDIO

Ceiling suspended




1.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

⊕ IP20 $\angle$ W-67° L80/100K

3000K | CRI >90 | 1750lm

	CHF	CODE
	586,50	195174W5
	586,50	195174B5





2.0

LED PCB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

⊕ IP20 $\angle$ W-67° L80/100K

3000K | CRI >90 | 2700lm

	CHF	CODE
	752,10	195274W5
	752,10	195274B5




back





PRIVATE RESIDENCE | STUDIO BRASS THE NETHERLANDS

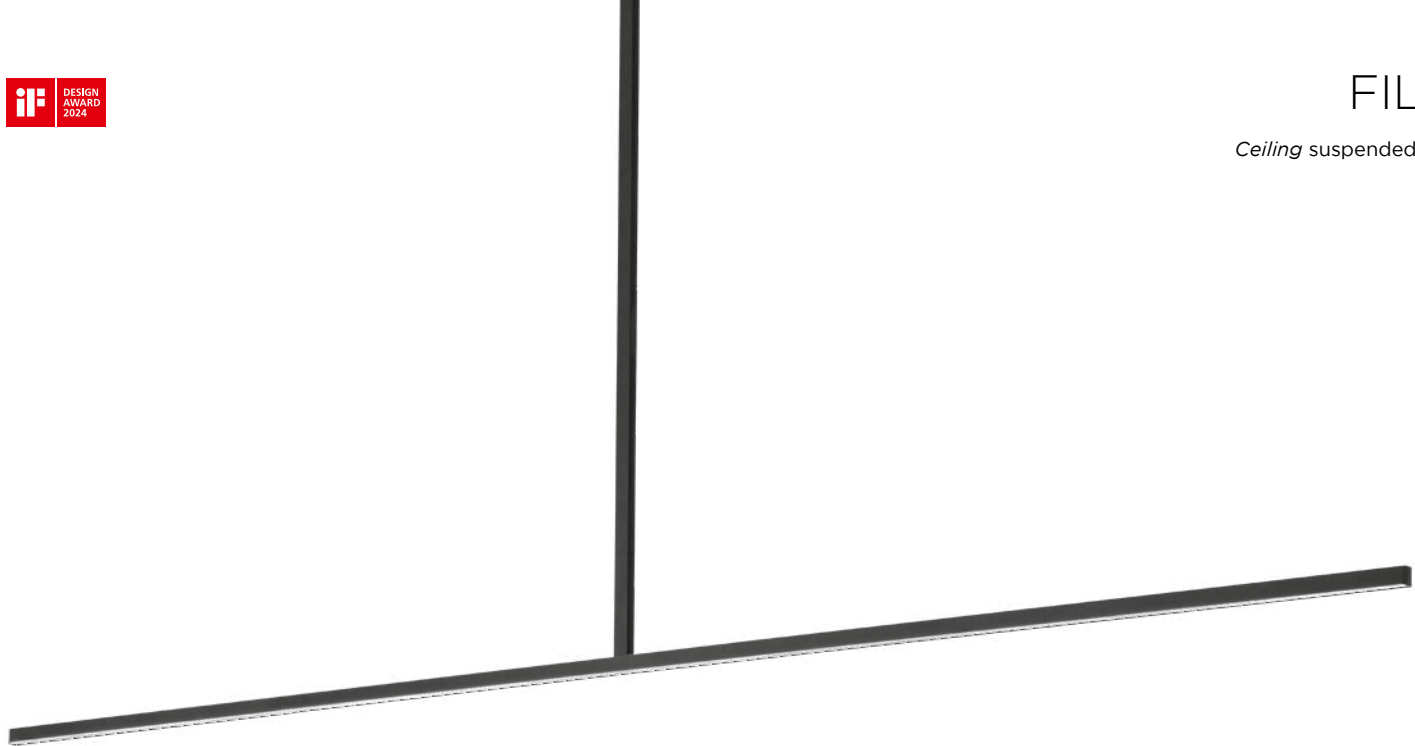

FIL


Ceiling suspended



267



681




1.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 L80/50K

	CHF	CODE
	641,70	2543M4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1070 >90	3
3000K	1120 >90	5



2.0

LED PCB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 L80/50K

	CHF	CODE
	683,10	2544M4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1280 >90	3
3000K	1340 >90	5





PRIVATE RESIDENCE | RICCARDO ROSSI SWITZERLAND



BENEDICTION | KKOL STUDIO SEOUL | SOUTH KOREA

DARF

Ceiling suspended

max. 2000

ø24

29

ø84

ø33

1026

2.1

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

□ IP20 L70|75K

3000K | CRI >80 | 1530lm

CHF

CODE

329,85

2565T7B4

max. 2000

ø24

29

ø84

ø33

1326

3.1

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

□ IP20 L70|75K

3000K | CRI >80 | 2300lm

CHF

CODE

336,75

2564T7B4

max. 2000

ø24

29

ø84

ø33

1626

4.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

□ IP20 L70|60K

CHF

CODE

342,25

2568T7B_

LIGHT COLOUR

LUMEN|CRI

CODE

3000K

3560|>80

4

4000K

3950|>80

6

max. 2000

ø24

29

ø84

ø33

1626

4.2

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | black textile cable

□ IP20 L70|60K

CHF

CODE

423,70

2568T8B_

LIGHT COLOUR

LUMEN|CRI

CODE

2700K

2780|>90

3

3000K

2940|>90

5

643

back

WEVER & DUCRÉ 444 — 445



MOTTO PILATES | STUDIO WOLF OFFENBACH | GERMANY




► DESIGN WITH LOVE



SHEDDA

Ceiling suspended




1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

⊕ IP20 L80/100K

	CHF	CODE
	545,10	242184LS_
	545,10	242184SG_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	565 >90	3
3000K	580 >90	5



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

⊕ IP20 L80/100K



	CHF	CODE
	683,10	242284LS_
	683,10	242284SG_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	565 >90	3
3000K	580 >90	5



SHEDDA fractal

Ceiling suspended

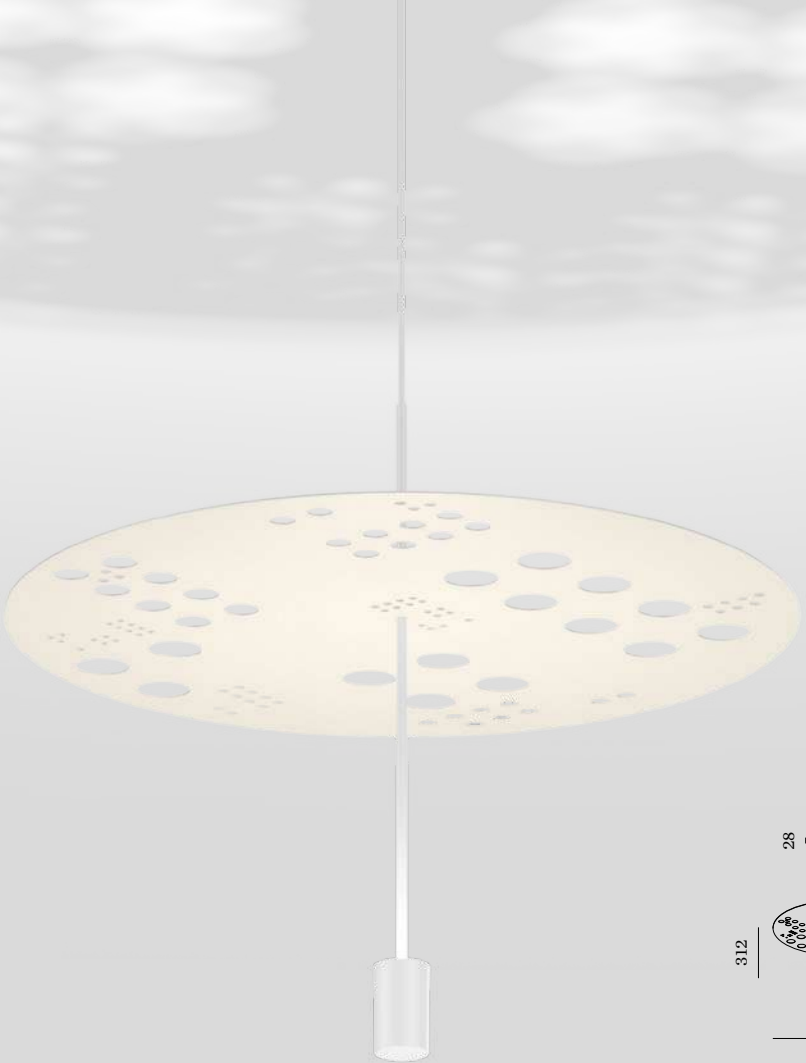


1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

⊕ IP20 L80/100K

	CHF	CODE
	614,10	242684LS_
	614,10	242684SG_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	565 >90	3
3000K	580 >90	5



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

⊕ IP20 L80/100K




	CHF	CODE
	752,10	242784LS_
	752,10	242784SG_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	565 >90	3
3000K	580 >90	5



KUJO

Ceiling suspended



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CHF	CODE
	411,25	273184W_
	411,25	273184SG_
	411,25	273184M_
	411,25	273184Q_
	411,25	273184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	755 >90	3
3000K	800 >90	5

2.0

LED PCB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CHF	CODE
	517,50	273284W_
	517,50	273284SG_
	517,50	273284M_
	517,50	273284Q_
	517,50	273284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1140 >90	3
3000K	1175 >90	5

3.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	CHF	CODE
	655,50	273384W_
	655,50	273384SG_
	655,50	273384M_
	655,50	273384Q_
	655,50	273384B_




LIGHT COLOUR	LUMEN CRI	CODE
2700K	1520 >90	3
3000K	1565 >90	5

white fixtures – white cable/silver steel
wire | SG fixtures – SG cable/silver steel
wire | others – black cable/steel wire
DALI on request

back



KUJO
Ceiling suspended



2.1

LED PCB 34W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80/100K

	CHF	CODE
	897,00	273484W_
	897,00	273484SG_
	897,00	273484M_
	897,00	273484Q_
	897,00	273484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1940 >90	3
3000K	2000 >90	5

3.2

LED PCB 48W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80/100K

	CHF	CODE
	1124,70	273684W_
	1124,70	273684SG_
	1124,70	273684M_
	1124,70	273684Q_
	1124,70	273684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2720 >90	3
3000K	2800 >90	5

3.2.1

LED PCB 60W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80/100K

	CHF	CODE
	1511,10	273784W_
	1511,10	273784SG_
	1511,10	273784M_
	1511,10	273784Q_
	1511,10	273784B_




LIGHT COLOUR	LUMEN CRI	CODE
2700K	3490 >90	3
3000K	3595 >90	5

white fixtures - white cable/0.3m
connector/silver steel wire | SG fixtures
- SG cable/0.3m connector/steel wire
others - black cable/0.3m connector/
black steel wire
other connectors on page 921



OPLIA CHANDELIER

Ceiling suspended

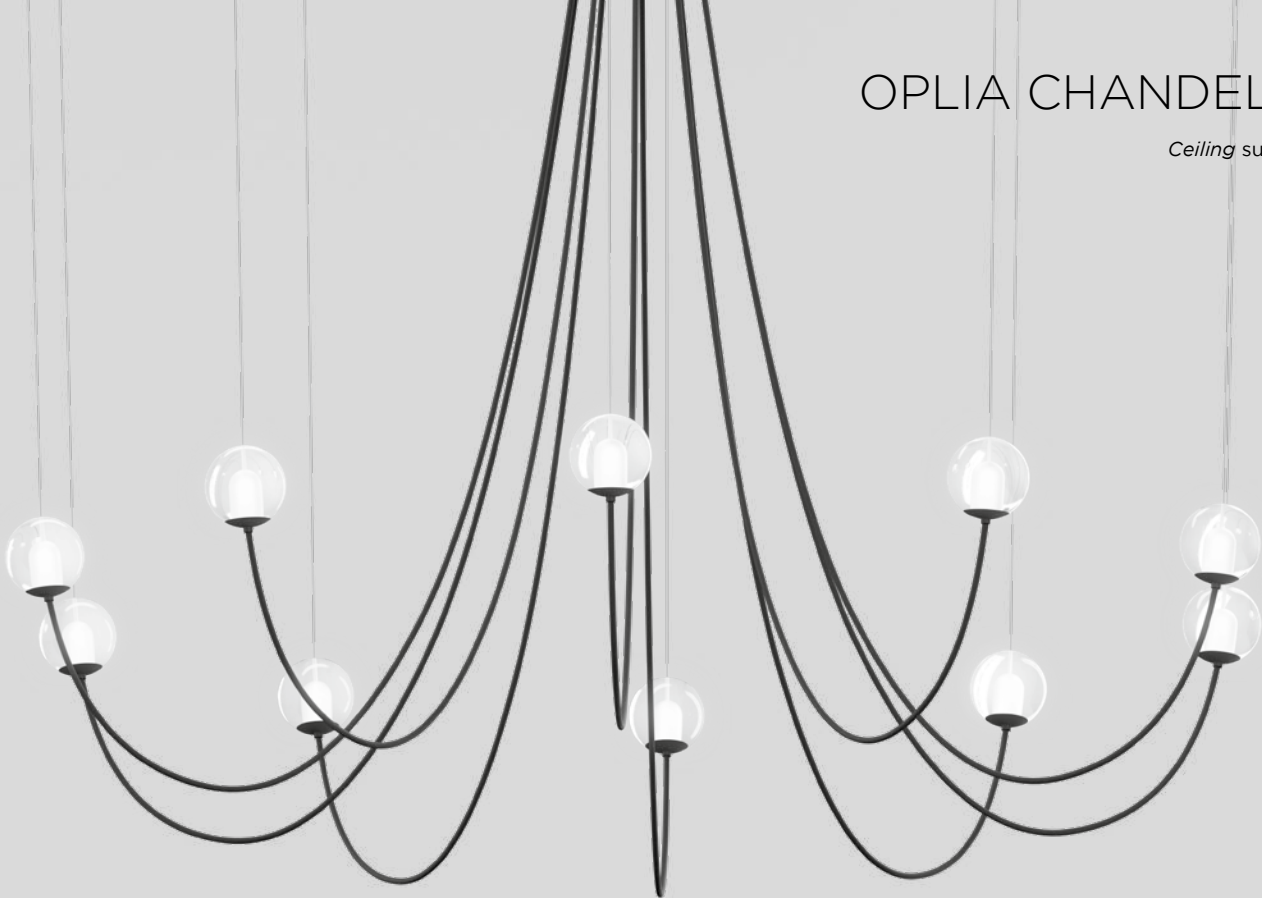

1.0

LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

⊕ IP20 L80/100K

2700K | CRI >90 | 2000lm

	CHF	CODE
☐	2677,20	246584W3
■	2677,20	246584B3



2.0


LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

⊕ IP20 L80/100K

2700K | CRI >90 | 2000lm

	CHF	CODE
☐	2704,80	246684W3
■	2704,80	246684B3



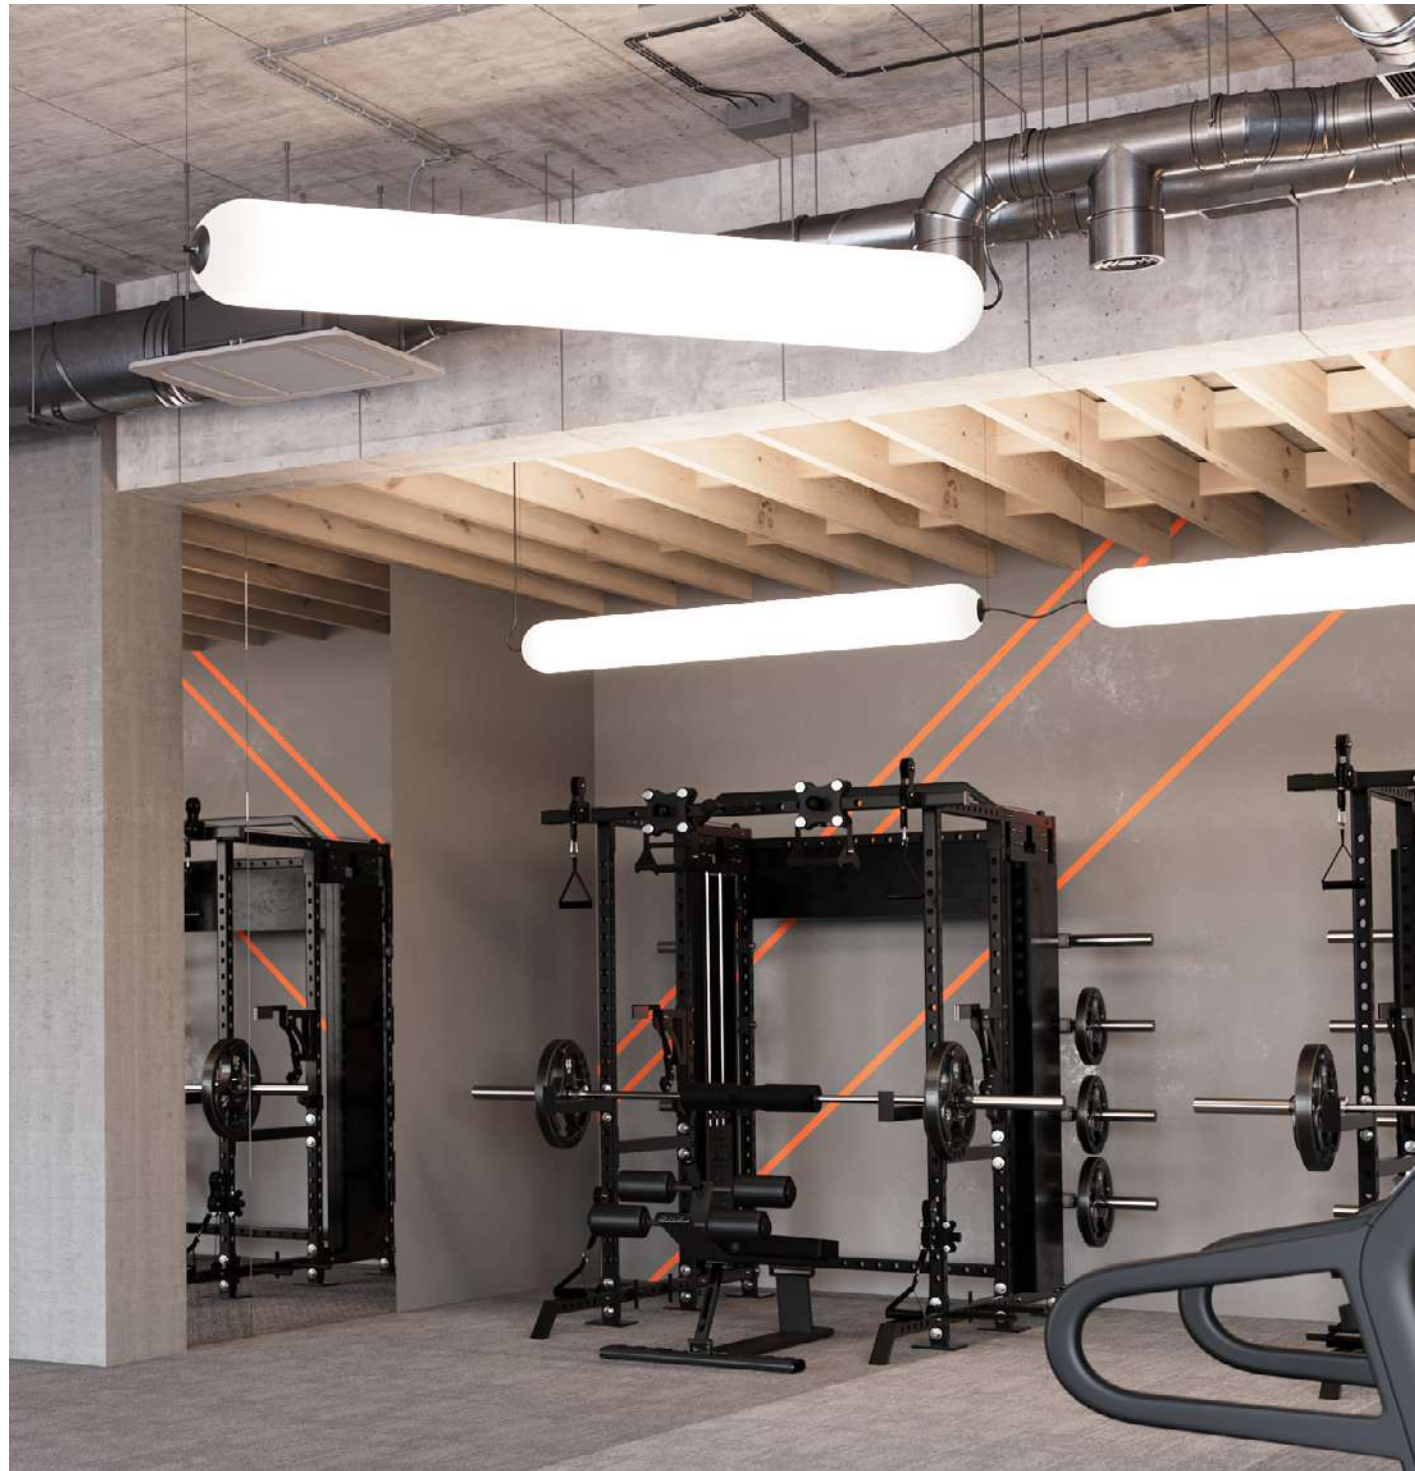




OFFICE NNE | OVER BYEN COPENHAGEN | DENMARK



GIGANT
Ceiling suspended



10.0

LED PCB 43W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°


⊕ IP20 L80|60K

3000K CRI >80 5330lm	
CHF	CODE
2332,20	213385W4

4000K CRI >80 5670lm	
CHF	CODE
2332,20	213385W6

OPTIONAL

	CHF	CODE
suspension		
set 4m	135,25	90015114
longer suspension on request		



16.0

LED PCB 85W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

⊕ IP20 L80|60K

3000K CRI >80 10700lm	
CHF	CODE
3105,00	213485W4

4000K CRI >80 11300lm	
CHF	CODE
3105,00	213485W6



OPTIONAL

	CHF	CODE
suspension		
set 4m	135,25	90015114
longer suspension on request		



CONE

Ceiling suspended

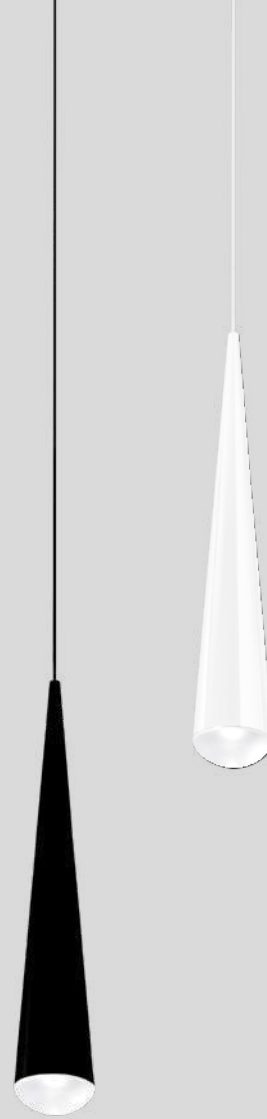


1.0


LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | chrome plated | glass

⊕ IP20 A M-38° L80|60K


2700K | CRI >90 | 405lm

	CHF	CODE
	389,20	200184W3
	389,20	200184B3



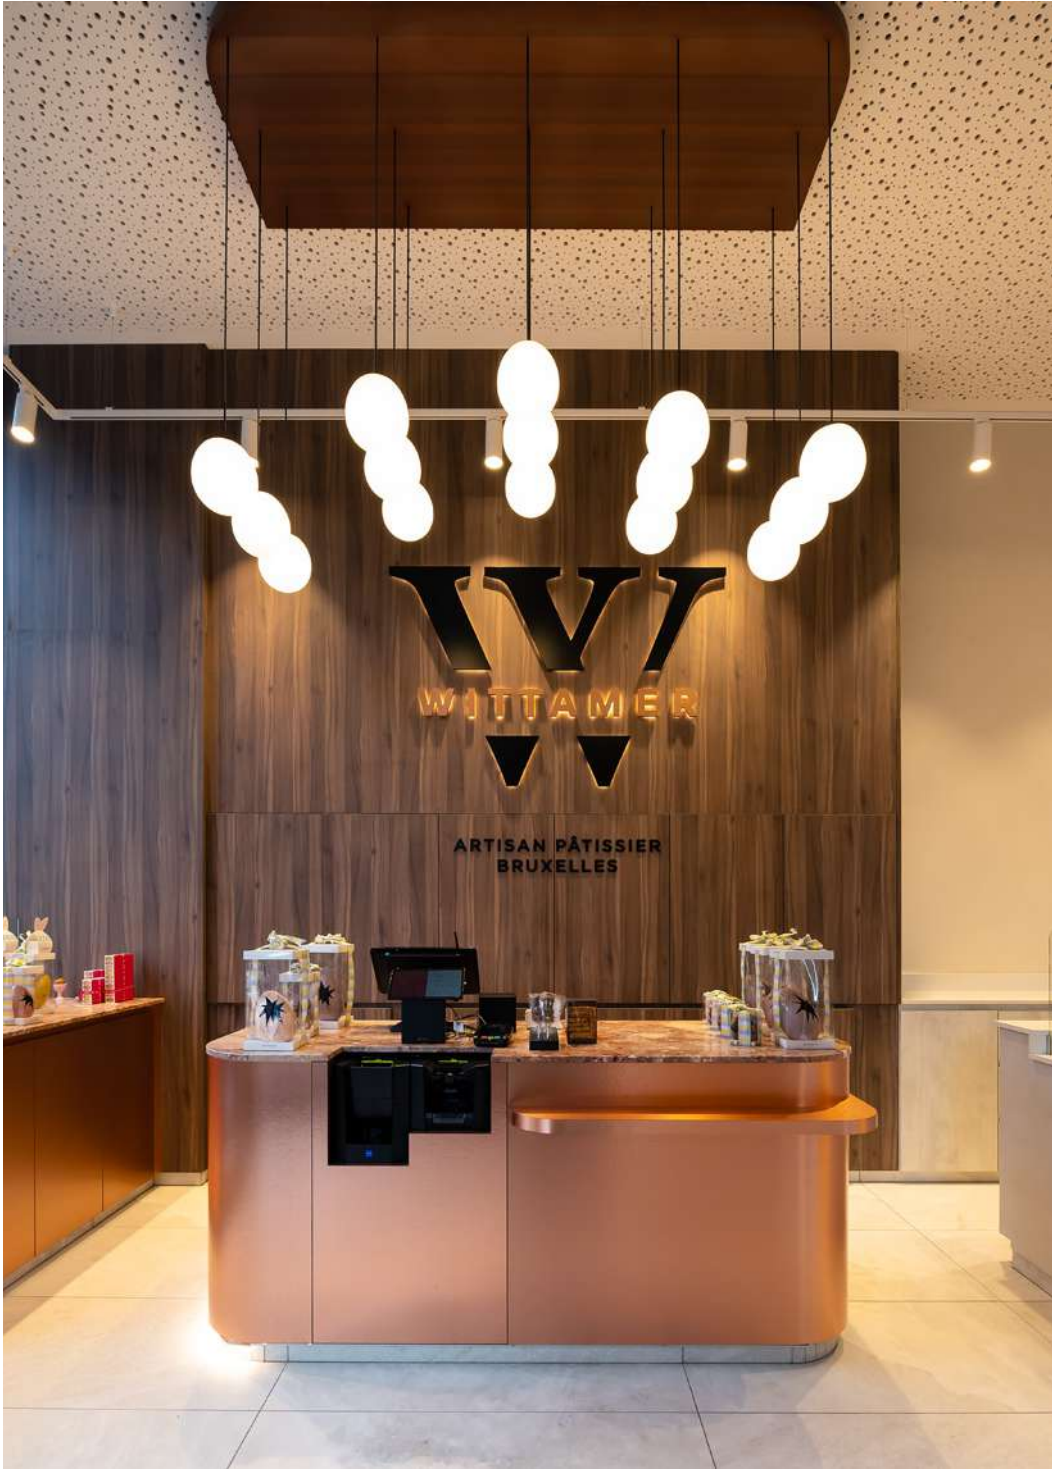

PASTRY SHOP WITTAMER BRUSSELS | BELGIUM



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass




	CHF	CODE
	269,10	2521G0WB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805



2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass




	CHF	CODE
	379,50	2522C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

	CHF	CODE
2700K 450lm	14,50	9003C103



3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass




	CHF	CODE
	489,90	2523E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 800lm	20,05	9003E152



4.0

A65 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass



	CHF	CODE
	752,10	2524E0WB0

OPTIONAL

A65 14.6W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 1375lm	30,40	9003E153

DRO

Ceiling suspended



279




373



623




715 | 731



1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20




OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2700K 405lm	44,20	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 405lm	44,20	9003E140



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	CHF	CODE
404,35	6342E0GB0	
404,35	6342E0NB0	
404,35	6342E0LB0	
404,35	6342E0BL0	


OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	CHF	CODE
625,15	6343E0GB0	
625,15	6343E0NB0	
625,15	6343E0LB0	
625,15	6343E0BL0	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

MIRRO

Ceiling suspended




283



625



721 | 733

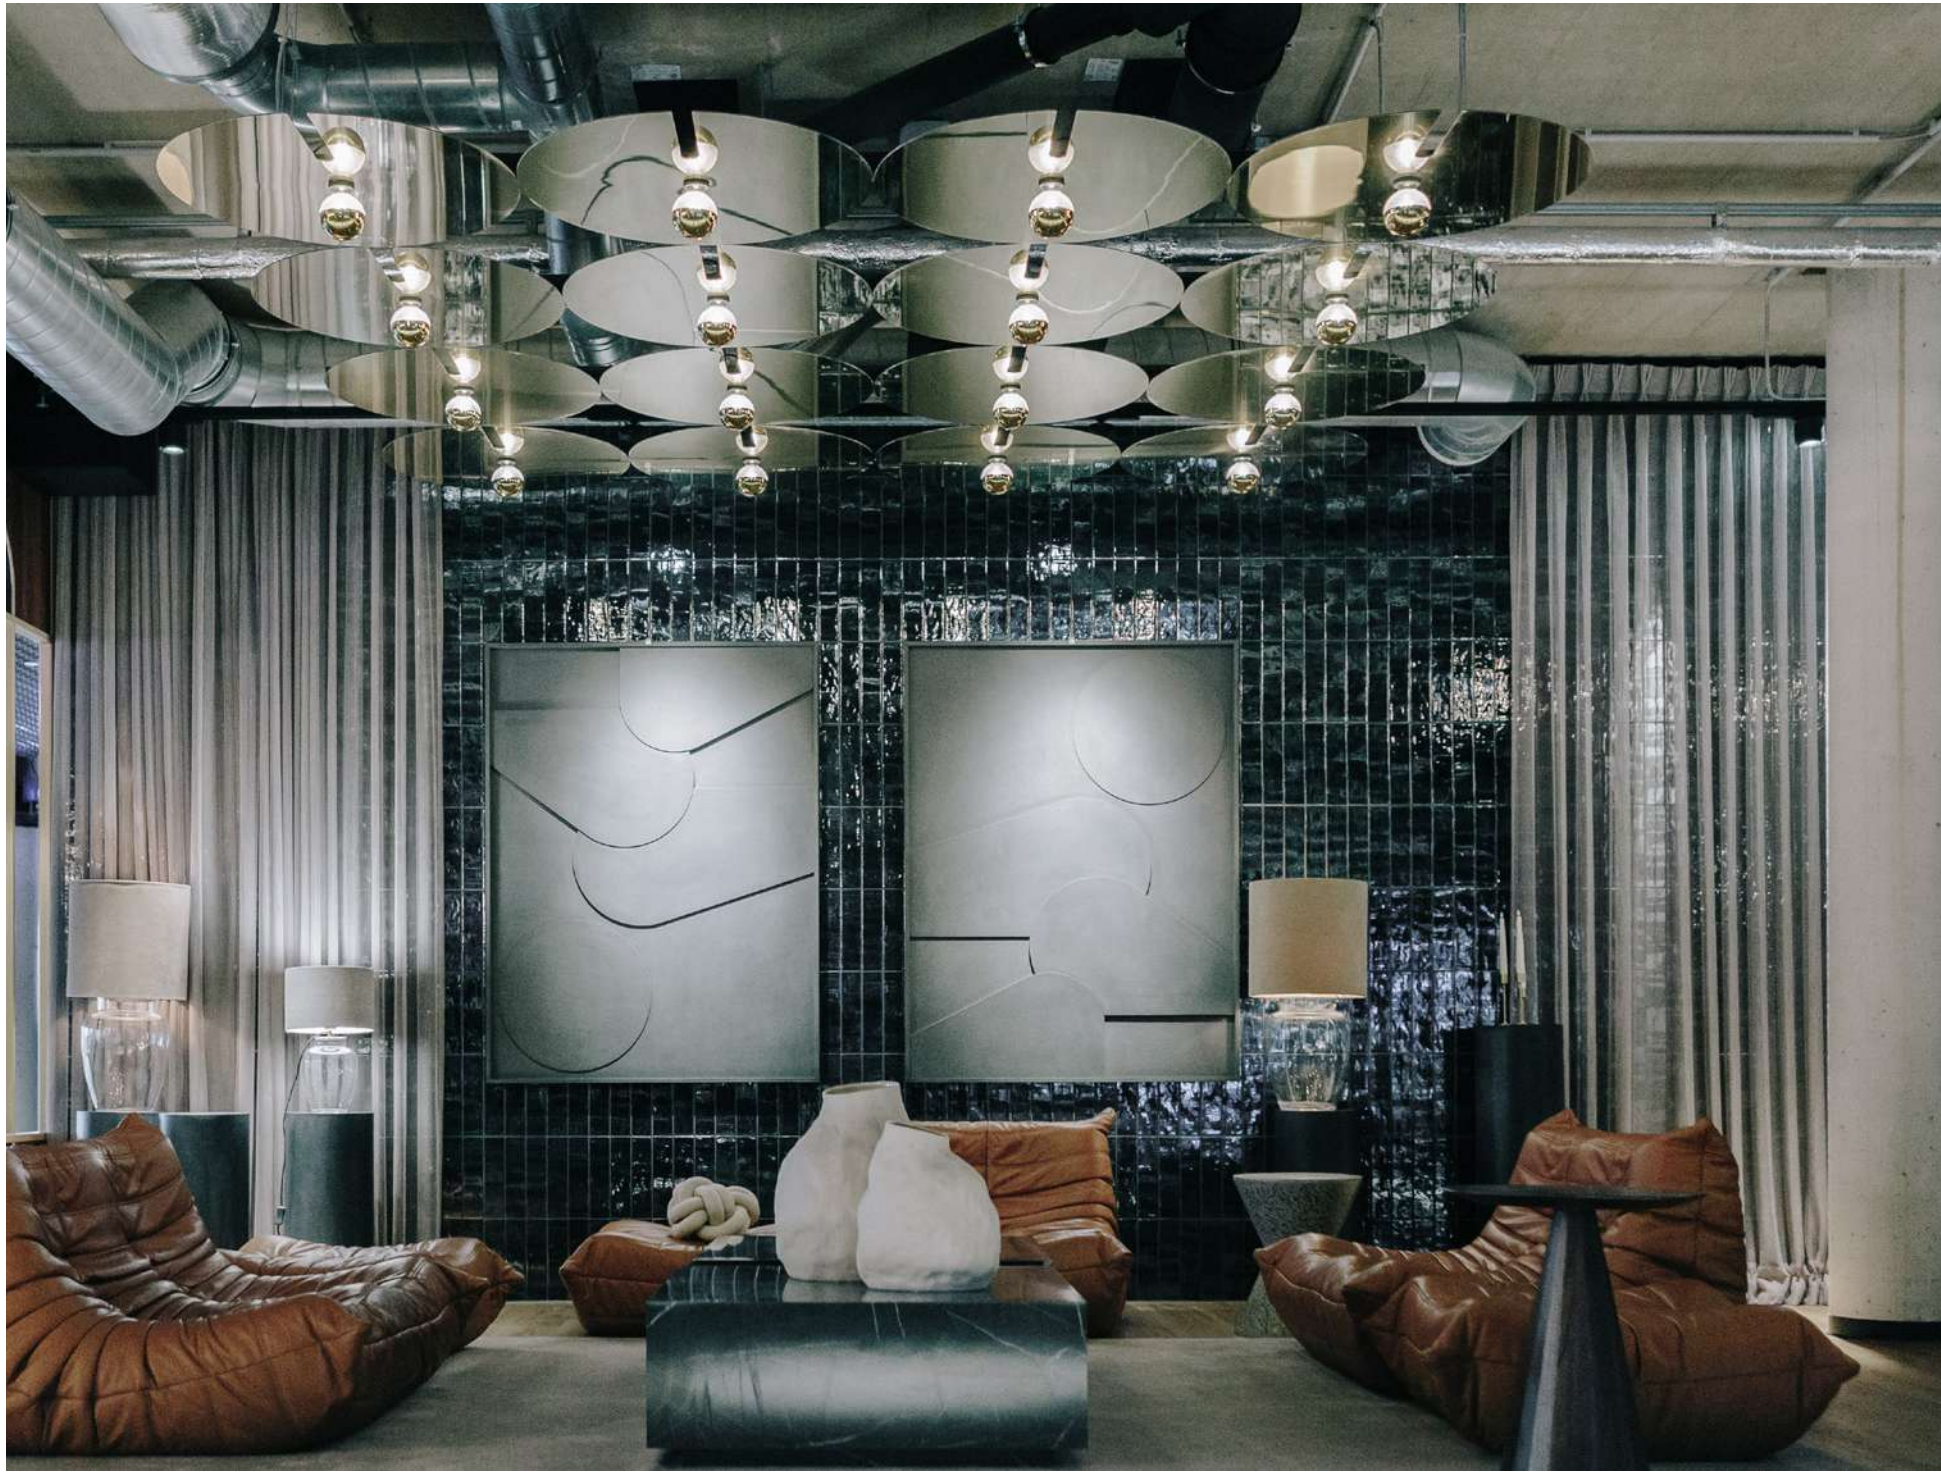


JOHN REED FITNESS GRAZ | AUSTRIA





MORE VERSIONS ONLINE
weverducre.com/more-mirro



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material



	CHF	CODE
	404,35	6342E0MF0
	404,35	6342E0LF0
	404,35	6342E0IF0
	404,35	6342E0AF0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

G95 10W | E27 | phase-cut dim | opal


	CHF	CODE
2700K 1060lm	45,55	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 375lm	45,55	9003E160

MIRRO SOFT

Ceiling suspended



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material



	CHF	CODE
	625,15	6343E0MF0
	625,15	6343E0LF0
	625,15	6343E0IF0
	625,15	6343E0AF0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

G95 10W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 1060lm	45,55	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 375lm	45,55	9003E160



COMBINE IT WITH OTHER OPTIONS
weverducre.com/mirro





back



SPIRRA SOFT

Ceiling suspended

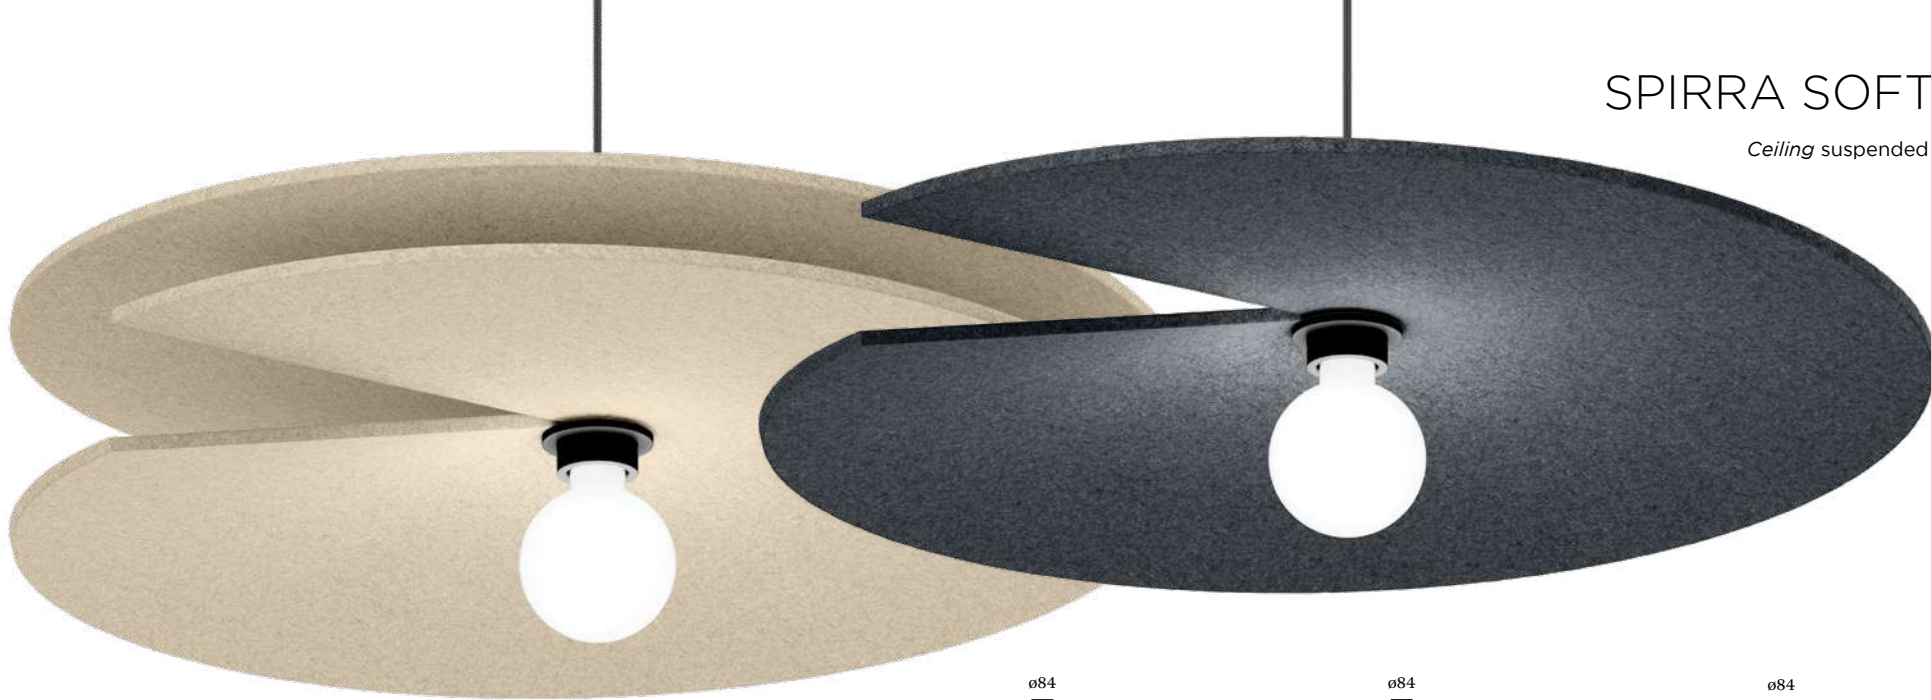

1.0


G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

⚡ ± IP20

	CHF	CODE
	503,70	6351E0MF0
	503,70	6351E0LF0
	503,70	6351E0IF0
	503,70	6351E0AF0

OPTIONAL

G95 10W E27 phase-cut dim opal		
	CHF	CODE
2700K 1060lm	45,55	9003E163



2.0


G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

⚡ ± IP20

	CHF	CODE
	765,90	6352E0MF0
	765,90	6352E0LF0
	765,90	6352E0IF0
	765,90	6352E0AF0

OPTIONAL

G95 10W E27 phase-cut dim opal		
	CHF	CODE
2700K 1060lm	45,55	9003E163



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

⚡ ± IP20

	CHF	CODE
	586,50	6353E0MF0
	586,50	6353E0LF0
	586,50	6353E0IF0
	586,50	6353E0AF0

OPTIONAL

G95 10W E27 phase-cut dim opal		
	CHF	CODE
2700K 1060lm	45,55	9003E163




MORE VERSIONS ONLINE
weverducre.com/more-spirra-soft



WAVE SOFT

Ceiling suspended



1.0


G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

⚡ ± IP20

	CHF	CODE
	600,30	6361E0MF0
	600,30	6361E0LF0
	600,30	6361E0IF0
	600,30	6361E0AF0

OPTIONAL

G95 10W E27 phase-cut dim opal		
	CHF	CODE
2700K 1060lm	45,55	9003E163



2.0


G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

⚡ ± IP20

	CHF	CODE
	959,10	6362E0MF0
	959,10	6362E0LF0
	959,10	6362E0IF0
	959,10	6362E0AF0

OPTIONAL

G95 10W E27 phase-cut dim opal		
	CHF	CODE
2700K 1060lm	45,55	9003E163



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

⚡ ± IP20

	CHF	CODE
	621,00	6363E0MF0
	621,00	6363E0LF0
	621,00	6363E0IF0
	621,00	6363E0AF0

OPTIONAL


G95 10W E27 phase-cut dim opal		
	CHF	CODE
2700K 1060lm	45,55	9003E163



MORE VERSIONS ONLINE
weverducre.com/more-wave-soft



EOAK FLOORS SHOWROOM | VIGONARCHITECTS HANOI | VIETNAM



04

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

⚡ ⚡ IP20

	CHF	CODE
	2697,90	2052E0S0
	2697,90	2052E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 245lm	42,80	9003E109


	CHF	CODE
A60 5.6W E27 phase-cut dim clear		
2700K 480lm	42,80	9003E138




MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS VINEUIL-SAINT-FIRMIN | FRANCE



JULES WABBES



J.J.W.
Ceiling suspended



042

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium



	CHF	CODE
	4954,20	2056E0S0
	4954,20	2056E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 245lm	42,80	9003E109

	CHF	CODE
A60 5.6W E27 phase-cut dim clear		
2700K 480lm	42,80	9003E138




► DESIGN WITH LOVE



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



J.J.W.
Ceiling suspended



05

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium




	CHF	CODE
	2339,10	2053E0S0
	2339,10	2053E0G0

OPTIONAL


A60 3.8W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 245lm	42,80	9003E109

	CHF	CODE
A60 5.6W E27 phase-cut dim clear		
2700K 480lm	42,80	9003E138

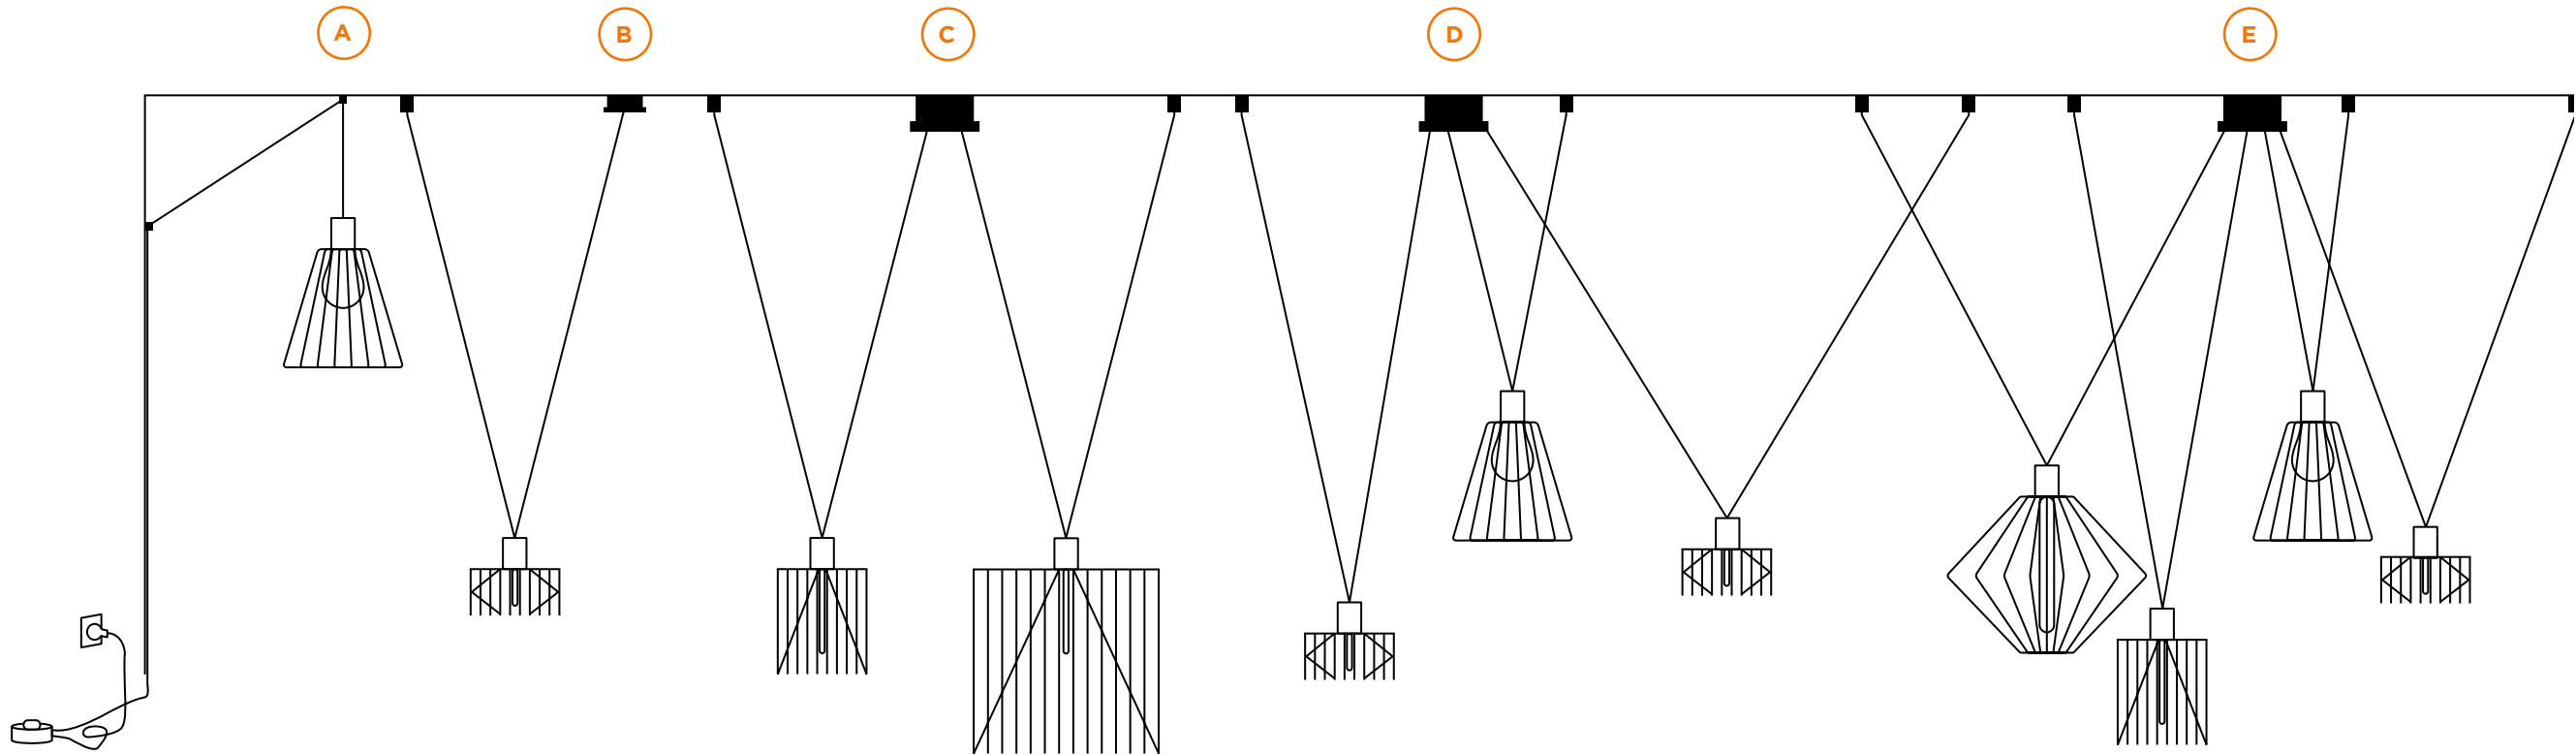


decenter



1.0 CONE

	CHF	CODE
	255,30	245100V0
	255,30	245100B0




2.0 WIRO

	CHF	CODE
	227,70	209600B0



1.8 WIRO

	CHF	CODE
	282,90	209200V0
	282,90	209200B0



3.8 WIRO

	CHF	CODE
	409,90	209300V0
	409,90	209300B0



1.1 DIAMOND

	CHF	CODE
	282,90	244100P0
	282,90	244100B0

A

CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable incl. cable plug with dimmer | 2 cable brackets included

	CHF	CODE
 8.5m	231,85	90015165

B

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included

	CHF	CODE
 2.6m	149,05	90052050
 6m	162,85	90052051

C

DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included

	CHF	CODE
 2.6m	273,25	90052055
 6m	314,65	90052056

D

DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included



	CHF	CODE
 2.6m	394,70	90052060
 6m	463,70	90052063

E

DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included

	CHF	CODE
 2.6m	507,85	90052067
 6m	576,85	90052078



1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel



	CHF	CODE
	419,55	2092E0V0
	419,55	2092E0B0

more suspension options on page 487

OPTIONAL

A60 5.6W | E27 | phase-cut dim | clear

CHF CODE

	CHF	CODE
2200K 380lm	53,85	9003E129
2700K 425lm	53,85	9003E136






PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

WIRO

Ceiling suspended



291



3.8

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel



	CHF	CODE
	546,50	2093E0V0
	546,50	2093E0B0

more suspension options on page 487

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted


	CHF	CODE
2200K 245lm	42,80	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 480lm	42,80	9003E138

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 380lm	53,85	9003E129
2700K 425lm	53,85	9003E136



6.1

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel



	CHF	CODE
	621,00	2094E0V0
	621,00	2094E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted


	CHF	CODE
2200K 245lm	42,80	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 480lm	42,80	9003E138

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

	CHF	CODE
2200K 585lm	59,35	9003E130
2700K 610lm	59,35	9003E135



6.5

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel



	CHF	CODE
	822,50	2095E0V0
	822,50	2095E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 245lm	42,80	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 480lm	42,80	9003E138

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

	CHF	CODE
2200K 585lm	59,35	9003E130
2700K 610lm	59,35	9003E135



MORE VERSIONS ONLINE
weverducre.com/more-wiro


BERND STEINHUBER

back

WEVER & DUCRÉ 490 — 491



RESTAURANT QUEBRACHO STEAKHOUSE & MIXOLOGY | MICHELE MEZZINA PESCARA | ITALY



1.1 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20


CHF	CODE
433,35	2441E0P0
433,35	2441E0B0

more suspension options on page 487

OPTIONAL

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

CHF	CODE
59,35	9003E130
59,35	9003E135



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel


IP20

CHF	CODE
903,90	2292E0P0
903,90	2292E0B0

OPTIONAL

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

CHF	CODE
59,35	9003E130
59,35	9003E135



3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

CHF	CODE
1276,50	2293E0P0
1276,50	2293E0B0

OPTIONAL

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

CHF	CODE
59,35	9003E130
59,35	9003E135

WIRO

Ceiling suspended



291



MORE VERSIONS ONLINE
weverducre.com/more-wiro

BERND STEINHUBER




back

WEVER & DUCRÉ 492 — 493



APARTMENT RONDA SANT PERE | DANIEL NASSAR SPAIN

reddot award 2019
winner lighting design



1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium


IP20

	CHF	CODE
	293,95	248120GG1
	293,95	248120BK1
	287,05	248120BB1

OPTIONAL

	CHF	CODE
	22,80	901228W3
	22,80	901228B3
	22,80	901228W5
	22,80	901228B5

more lamps and info on page 905



1.1 E27


A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	CHF	CODE
	293,95	2481E0GG1
	293,95	2481E0BK1
	287,05	2481E0BB1

OPTIONAL

	CHF	CODE
	20,05	9003E152



1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20

	CHF	CODE
	380,90	2481E0BF2
	354,70	2481E0BK2
	343,65	2481E0BB2

OPTIONAL

	CHF	CODE
	20,05	9003E152



639

725 | 735




MORE VERSIONS ONLINE
weverducre.com/more-roomor

back





MORE VERSIONS ONLINE
weverducre.com/more-roomor



1.3

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt



	CHF	CODE
	487,15	2481E0BF3
	472,00	2481E0BK3
	454,05	2481E0BB3

OPTIONAL

A60 9W E27 phase-cut dim opal	CHF	CODE
2700K 800lm	20,05	9003E152

ROOMOR
Ceiling suspended



725 | 735

1.4

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium



	CHF	CODE
	545,10	2481E0BK4
	528,55	2481E0BB4

OPTIONAL

A60 9W E27 phase-cut dim opal	CHF	CODE
2700K 800lm	20,05	9003E152





LINK LAB CREATIVE OFFICE | STAY STUDIO KORTRIJK | BELGIUM



ROOMOR OFFICE

Ceiling suspended



1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

⊕ IP20 L80|60K UGR ≤ 19

	CHF	CODE
	1083,30	1681M5W_
	1083,30	1681M5B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	3660 >90	5
4000K	3660 >90	7




1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

⊕ IP20 L80|60K

	CHF	CODE
	1069,50	168185W_
	1069,50	168185B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	3700 >90	5
4000K	3700 >90	7



LOW

CHOOSE YOUR BASE

AL


BL

EL

FL

FL

FL



AL | SINGLE BASE

ceiling base round
phase-cut dim | 350mA | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112G0
	89,70	914112M0
	89,70	914112Q0
	89,70	914112B0


DALI versions on page 920

OPLIA

phase-cut dim | 250mA | incl. driver

	CHF	CODE
	89,70	914115W0
	89,70	914115M0
	89,70	914115B0

DALI versions on page 920



BL | SEMI RECESSED SINGLE BASE

phase-cut dim | 350mA | incl. driver


73-76 11,70 10-35

	CHF	CODE
	117,30	914152W0
	117,30	914152L0
	117,30	914152M0
	117,30	914152Q0
	117,30	914152B0

OPLIA

phase-cut dim | 250mA | incl. driver


	CHF	CODE
	103,50	914155W0
	103,50	914155M0
	103,50	914155B0



EL | MULTI BASE LINEAR

3, 6 or 9 luminaires | phase-cut dim
incl. driver | 175mA per luminaire
600mm | 1200mm | 1800mm

	CHF	CODE
	for 3 227,70	914133W0
	for 3 227,70	914133B0
	for 6 372,60	914134W0
	for 6 372,60	914134B0
	for 9 545,10	914135W0
	for 9 545,10	914135B0



GL | TRACK ADAPTER

for 3-phase tracks
phase-cut dim | 350mA | incl. driver

	CHF	CODE
	63,50	914173W0
	63,50	914173B0


DALI versions on page 920

OPLIA

phase-cut dim | 250mA | incl. driver

	CHF	CODE
	63,50	914171W0
	63,50	914171B0

DALI versions on page 920

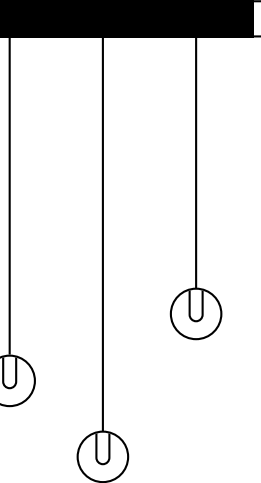


FL | MULTI CHANDELIER

3 luminaires | 3x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	CHF	CODE
	358,80	914121WW0
	414,00	914121BL0
	358,80	914121BM0
	358,80	914121BQ0
	358,80	914121BB0

RAY MINI | HEXO MINI | SOLLI

	CHF	CODE
	358,80	914124WW0
	414,00	914124BL0
	358,80	914124BM0
	358,80	914124BQ0
	358,80	914124BB0

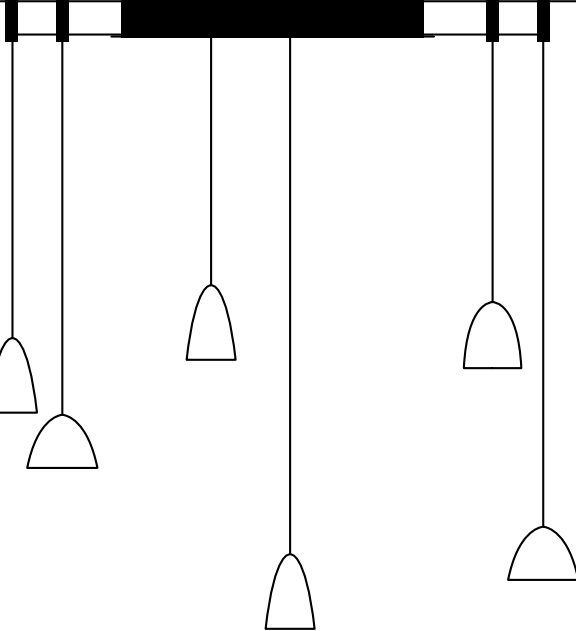


FL | MULTI CHANDELIER

6 luminaires | 6x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	CHF	CODE
	407,10	914122WW0
	462,30	914122BL0
	407,10	914122BM0
	407,10	914122BQ0
	407,10	914122BB0

RAY MINI | HEXO MINI | SOLLI

	CHF	CODE
	407,10	914125WW0
	462,30	914125BL0
	407,10	914125BM0
	407,10	914125BQ0
	407,10	914125BB0




FL | MULTI CHANDELIER

9 luminaires | 9x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	CHF	CODE
	455,40	914123WW0
	510,60	914123BL0
	455,40	914123BM0
	455,40	914123BQ0
	455,40	914123BB0

RAY MINI | HEXO MINI | SOLLI

	CHF	CODE
	455,40	914126WW0
	510,60	914126BL0
	455,40	914126BM0
	455,40	914126BQ0
	455,40	914126BB0

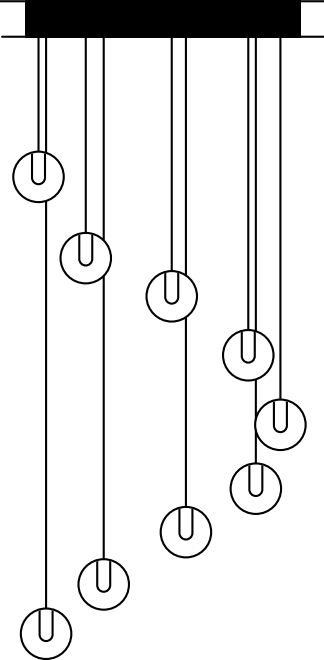

HOOK

optional for
FL | MULTI CHANDELIER

	CHF	CODE
	26,25	90052083
	26,25	90052084

more Multi chandelier options
on page 920




back



COZY CONE

Low voltage
Ceiling suspended



CHOOSE YOUR BASE

AL | Single base

ceiling base round | 350mA
phase-cut dim | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112B0

BL | Semi recessed single base

EL | Multi base linear

FL | Multi chandelier

6 luminaires | 6x175mA | 1440lm
phase-cut dim | incl. driver

	CHF	CODE
	407,10	914122WW0
	462,30	914122BL0
	407,10	914122BB0




GL | Track adapter

more infos on page 500



LOXONE VERSIONS ONLINE

weverducre.com/more-cozy-cone



1.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 500lm

	CHF	CODE
	172,50	241161LS3
	172,50	241161SG3
	172,50	241161FJ3
	183,55	241161T3
	172,50	241161B3

2.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

	CHF	CODE
	179,40	241261LS3
	179,40	241261SG3
	179,40	241261FJ3
	190,45	241261T3
	179,40	241261B3


3.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 545lm


	CHF	CODE
	186,30	241361LS3
	186,30	241361SG3
	186,30	241361FJ3
	197,35	241361T3
	186,30	241361B3



back



LOXONE VERSIONS ONLINE
weverducre.com/more-hexo

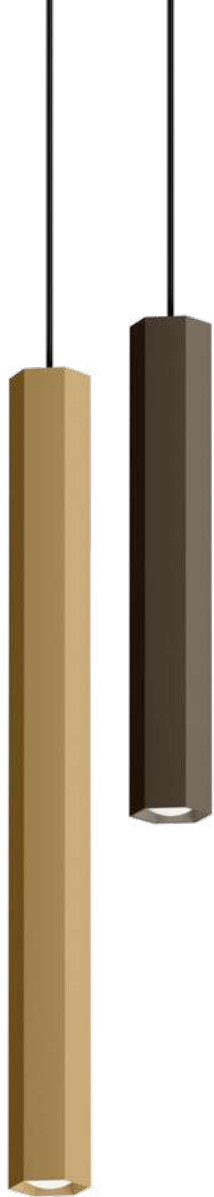

CHOOSE YOUR BASE

AL Single base ceiling base round 350mA phase-cut dim incl. driver		
	CHF	CODE
	89,70	914112M0
	89,70	914112Q0
	89,70	914112B0

BL Semi recessed single base			
EL Multi base linear			
FL Multi chandelier			
GL Track adapter			
more infos on page 500			

3.0

LED COB 6W | 350mA | 18V
aluminium

IP20 W-75° L80|50K

	CHF	CODE
	256,70	259171M_
	256,70	259171Q_
	256,70	259171B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	565 >90	5

5.0

LED COB 6W | 350mA | 18V
aluminium



IP20 W-75° L80|50K

	CHF	CODE
	284,30	259271M_
	284,30	259271Q_
	284,30	259271B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	565 >90	5


HEXO mini

Low voltage
Ceiling suspended





LOXONE VERSIONS ONLINE
weverducre.com/more-ray

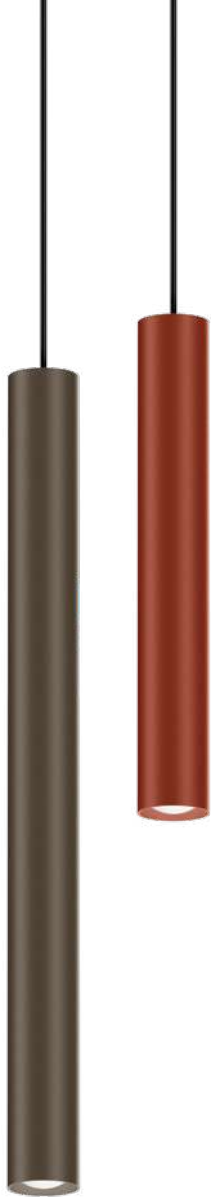

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112Q0
	89,70	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

3.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

 IP20  W-75° L80|50K

	CHF	CODE
	247,05	260171W_
	247,05	260171LS_
	247,05	260171ME_
	247,05	260171Q_
	247,05	260171B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	565 >90	5

RAY mini

Low voltage
Ceiling suspended



247



375 | 391



247



613




300

400

max. 4000

ø43



500

max. 4000

ø43

5.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

 IP20  W-75° L80|50K

	CHF	CODE
	274,65	260271W_
	274,65	260271LS_
	274,65	260271Q_
	274,65	260271B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	525 >90	3
3000K	565 >90	5



back



CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112M0
	89,70	914112Q0
	89,70	914112B0

BL | Semi recessed single base


EL | Multi base linear
3 luminaires | 3x175mA | 525mm
phase-cut dim | incl. driver

	CHF	CODE
	227,70	914133W0
	227,70	914133B0

FL | Multi chandelier
GL | Track adapter
more infos on page 500



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-match-suspended



3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	CHF	CODE
	160,10	279271W_
	169,75	279271L_
	169,75	279271M_
	169,75	279271Q_
	160,10	279271B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

MATCH

Low voltage
Ceiling suspended



5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	CHF	CODE
	178,05	279371W_
	190,45	279371L_
	190,45	279371M_
	190,45	279371Q_
	178,05	279371B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



PRIVATE RESIDENCE | IN LIJN INTERIEUR ARCHITECTUUR BELGIUM



LOXONE VERSIONS ONLINE
weverducre.com/more-trace-suspended



CHOOSE YOUR BASE

		CHF	CODE
		89,70	914112W0
		89,70	914112L0
		89,70	914112M0
		89,70	914112B0

BL | Semi recessed single base

		CHF	CODE
3 luminaires 3x175mA 525mm			
phase-cut dim incl. driver			
		CHF	CODE
		227,70	914133W0
		227,70	914133B0

FL | Multi chandelier
GL | Track adapter
more infos on page 500

2.0

LED COB 6W | 350mA | 17V
aluminium
white fixtures – white cable
others – black cable



IP20 W-75° L80/50K

		CHF	CODE
		293,95	253471W_
		296,70	253471BL_
		296,70	253471BM_
		293,95	253471B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	565 >90	3
3000K	590 >90	5

TRACE

Low voltage
Ceiling suspended

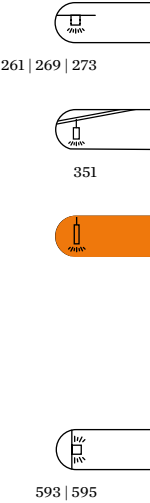





PRIVATE RESIDENCE | STUDIO FOOLEN THE NETHERLANDS



CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112M0
	89,70	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-trace-suspended

3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	CHF	CODE
	186,30	253171W_
	196,00	253171BL_
	196,00	253171BM_
	186,30	253171B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable




IP20 W-54° L80|50K

	CHF	CODE
	198,75	253271W_
	211,15	253271BL_
	211,15	253271BM_
	198,75	253271B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	475 >90	5

TRACE




Low voltage
Ceiling suspended

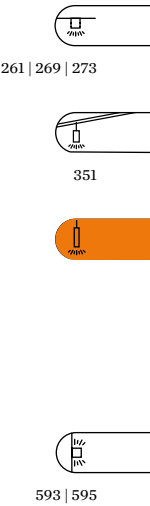



ODREY

Low voltage
Ceiling suspended



CHOOSE YOUR BASE

AL | Single base

ceiling base round | 350mA
phase-cut dim | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112G0
	89,70	914112Q0
	89,70	914112B0

BL | Semi recessed single base

EL | Multi base linear

FL | Multi chandelier

GL | Track adapter

more infos on page 500



LOXONE VERSIONS ONLINE

weverducre.com/more-odrey-suspended

1.1

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CHF	CODE
	237,40	287161WW_
	237,40	287161QQ_
	237,40	287161BL_
	237,40	287161BG_
	237,40	287161BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	445 >90	5

1.2

LED COB 7W | 350mA | 18V
aluminium | shade matching
incl inner cover
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CHF	CODE
	328,45	287261WW_
	328,45	287261QQ_
	328,45	287261BL_
	328,45	287261BG_
	328,45	287261BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	445 >90	5

1.3

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CHF	CODE
	238,75	287361WW_
	238,75	287361QQ_
	238,75	287361BL_
	238,75	287361BG_
	238,75	287361BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	470 >90	5



CHOOSE YOUR BASE



AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112G0
	89,70	914112Q0
	89,70	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500



LOXONE VERSIONS ONLINE
weverducre.com/more-odrey-suspended



1.4

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CHF	CODE
	248,40	287461WW_
	248,40	287461QQ_
	248,40	287461BL_
	248,40	287461BG_
	248,40	287461BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	470 >90	5

1.5

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CHF	CODE
	252,55	287561WW_
	252,55	287561QQ_
	252,55	287561BL_
	252,55	287561BG_
	252,55	287561BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	470 >90	5

1.6

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	CHF	CODE
	253,95	287661WW_
	253,95	287661QQ_
	253,95	287661BL_
	253,95	287661BG_
	253,95	287661BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	505 >90	5

optional inner cover on page 910





LOXONE VERSIONS ONLINE
weverducre.com/more-oplia



OPLIA

Low voltage
Ceiling suspended



357




CHOOSE YOUR BASE

AL Single base		
ceiling base round 250mA		
phase-cut dim incl. driver		
	CHF	CODE
	89,70	914115W0
	89,70	914115M0
	89,70	914115B0

BL Semi recessed single base		
EL Multi base linear		
FL Multi chandelier		
6 luminaires 6x175mA 1020lm		
phase-cut dim incl. driver		
	CHF	CODE
	407,10	914122WW0
	407,10	914122BM0
	407,10	914122BB0

GL Track adapter		
more infos on page 500		



1.0		
LED PCB 4W 250mA 12V		
aluminium glass		
white fixtures – white cable		
others – black cable		
IP20 L80/100K		
2700K CRI >90 245lm		
	CHF	CODE
	196,00	246181W3
	196,00	246181M3
	196,00	246181B3





SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM



LOXONE VERSIONS ONLINE
weverducre.com/more-solli



CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112B0

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

1.0

LED COB 7W | 350mA | 18V
aluminium
artisanal hand blown glass

 IP20 L80|50K

	CHF	CODE
	317,40	238281FD_
	317,40	238281TD_
	265,00	238281WB_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >90	3
3000K	370 >90	5

SOLLI

Low voltage
Ceiling suspended






359





SOLLI COCOON

Low voltage
Ceiling suspended



CHOOSE YOUR BASE

AL Single base ceiling base round 350mA phase-cut dim incl. driver		
	CHF	CODE
	89,70	914112W0
	89,70	914112L0
	89,70	914112B0

BL Semi recessed single base		
EL Multi base linear		
FL Multi chandelier		
GL Track adapter		
more infos on page 500		



LOXONE VERSIONS ONLINE
weverducre.com/more-solli-cocoon

1.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material



	CHF	CODE
	443,00	238381MF_
	443,00	238381LF_
	443,00	238381OF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	265 >90	3
3000K	275 >90	5

2.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material



	CHF	CODE
	452,65	238481MF_
	452,65	238481LF_
	452,65	238481OF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	275 >90	3
3000K	285 >90	5

3.0

full acoustic element
aluminium | PET felt material
incl. black single base
noise absorbing material

	CHF	CODE
	284,30	238600MF0
	284,30	238600LF0
	284,30	238600OF0



high

CHOOSE YOUR BASE

AH

BH
















CH

DH

EH

FH

IH

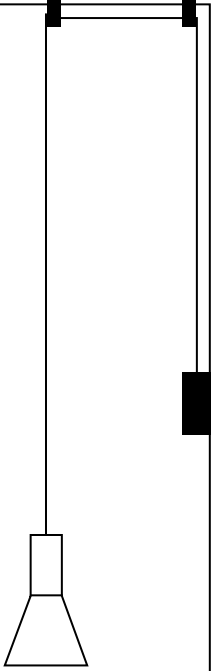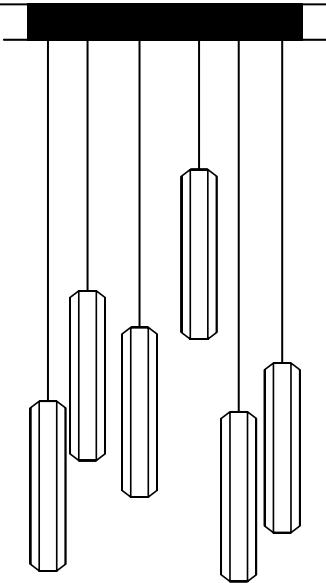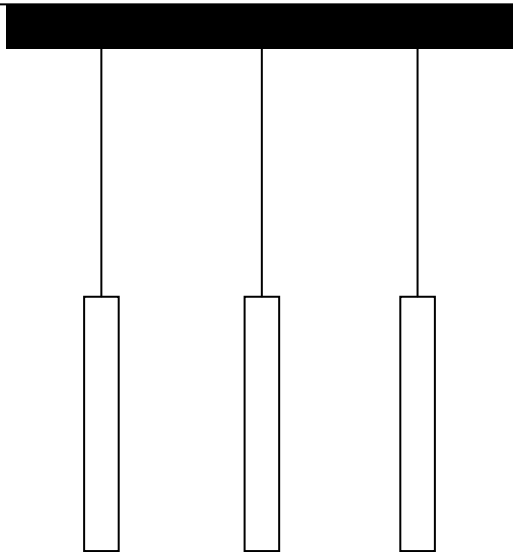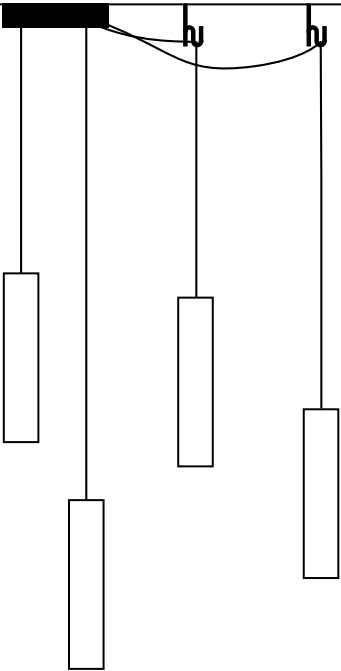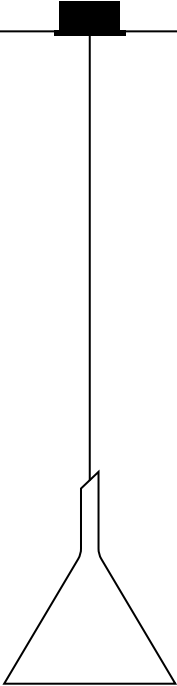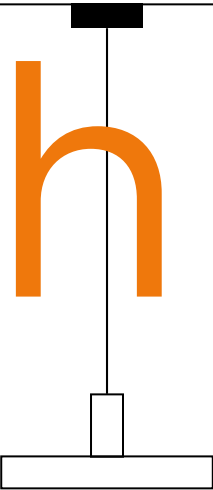

AH | SINGLE BASE
ceiling base round

	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110G0
	40,05	914110M0
	40,05	914110Q0
	40,05	914110B0

BH | SEMI RECESSED
SINGLE BASE

73-76 70 10-35

	CHF	CODE
	66,25	914150W0
	66,25	914150L0
	66,25	914150M0
	66,25	914150Q0
	66,25	914150B0

CH | INVISIBLE SINGLE
BASE
plasterkit | system - with fixation
max. 10kg

68 70 12,5-27,50

	CHF	CODE
	149,05	90015196
	149,05	90015195

DH | MULTI BASE ROUND
up to max. 4 | 8 luminaires

	CHF	CODE
max. 4	89,70	90052005
max. 4	89,70	90052006
max. 8	107,65	90052031
max. 8	107,65	90052032

EH | MULTI BASE LINEAR
1-9 luminaires
600mm | 900mm | 1800mm

	CHF	CODE
for 3	165,60	914130W0
for 3	165,60	914130B0
for 6	248,40	914131W0
for 6	248,40	914131B0
for 9	358,80	914132W0
for 9	358,80	914132B0

FH | MULTI CHANDELIER
1-9 luminaires

	CHF	CODE
	324,30	914120WW0
	379,50	914120BL0
	324,30	914120BM0
	324,30	914120BQ0
	324,30	914120BB0

optional hook

	CHF	CODE
	26,25	90052083
	26,25	90052084

GH | TRACK ADAPTER
for 1-phase tracks

	CHF	CODE
	22,10	90014277
	22,10	90014278



for 3-phase tracks

	CHF	CODE
	22,10	90014279
	22,10	90014280

IH | WALL BASE
for 1 luminaire | incl. 2 wall-ceiling
brackets | for cable 4.25-5.5mm
diameter | incl. switch on/off

	CHF	CODE
	80,05	90019195
	80,05	90019196

wall - ceiling bracket

	CHF	CODE
	15,90	90019197
	15,90	90019198



HEXO mini

High voltage
Ceiling suspended



243





375 | 391



611



611



3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium



5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CHF	CODE
	40,05	914110M0
	40,05	914110Q0
	40,05	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base

more infos on page 528

	CHF	CODE
	168,40	259120M0
	168,40	259120Q0
	168,40	259120B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim			
	CHF	CODE	
	2700K 225lm	20,05	901128B3
	3000K 235lm	20,05	901128B5

	CHF	CODE
	196,00	259220M0
	196,00	259220Q0
	196,00	259220B0

OPTIONAL

PAR11 4.3W GU10 phase-cut dim			
	CHF	CODE	
	2700K 225lm	20,05	901128B3
	3000K 235lm	20,05	901128B5





LOXONE VERSIONS ONLINE
weverducre.com/more-hexo


CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CHF	CODE
	40,05	914110G0
	40,05	914110Q0
	40,05	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base

more infos on page 528



3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⚡ M-36° L80|55K

	CHF	CODE
	271,90	226464G_
	271,90	226464Q_
	271,90	226464P_
	269,10	226464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	425 >90	5
2000-3000K	260 >90	9

LED module 20 years replaceability



back

HEXO

High voltage
Ceiling suspended



245



377 | 393



393

3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20


	CHF	CODE
	153,20	227420G0
	153,20	227420Q0
	153,20	227420P0
	150,45	227420B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
 2700K 445lm	22,80	901228W3
 2700K 440lm	22,80	901228B3
 3000K 465lm	22,80	901228W5
 3000K 460lm	22,80	901228B5

more lamps and info on page 905

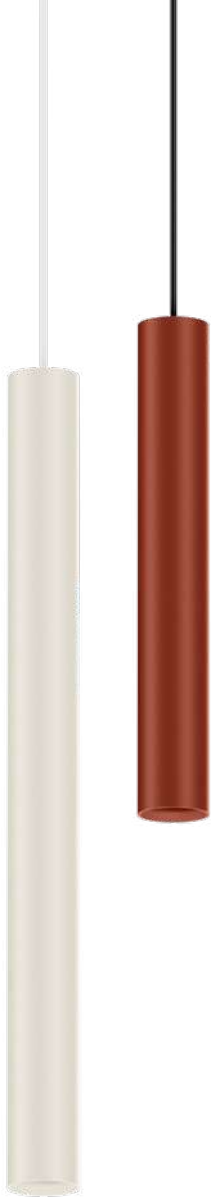

CHOOSE YOUR BASE

AH | Single base

ceiling base round | ø83

	CHF	CODE
	40,05	914110W0
	40,05	914110Q0
	40,05	914110B0

BH | Semi recessed single base

ceiling base round | ø84

	CHF	CODE
	66,25	914150W0
	66,25	914150Q0
	66,25	914150B0

CH | Invisible single base

DH | Multi base round

EH | Multi base linear

FH | Multi chandelier

GH | Track adapter

IH | Wall base

more infos on page 528

3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable



	CHF	CODE
	158,70	260120W0
	158,70	260120LS0
	158,70	260120ME0
	158,70	260120Q0
	158,70	260120B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CHF	CODE
	2700K 240lm	20,05 901128W3
	2700K 225lm	20,05 901128B3
	3000K 255lm	20,05 901128W5
	3000K 235lm	20,05 901128B5

RAY mini

High voltage
Ceiling suspended



5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable



	CHF	CODE
	186,30	260220W0
	186,30	260220LS0
	186,30	260220Q0
	186,30	260220B0

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	CHF	CODE
	2700K 240lm	20,05 901128W3
	2700K 225lm	20,05 901128B3
	3000K 255lm	20,05 901128W5
	3000K 235lm	20,05 901128B5



LOXONE VERSIONS ONLINE
weverducre.com/more-ray

CHOOSE YOUR BASE

AH | Single base

ceiling base round | Ø83

	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110G0
	40,05	914110M0
	40,05	914110Q0
	40,05	914110B0

BH | Semi recessed single base

CH | Invisible single base

DH | Multi base round


EH | Multi base linear

FH | Multi chandelier

GH | Track adapter

IH | Wall base

more infos on page 528

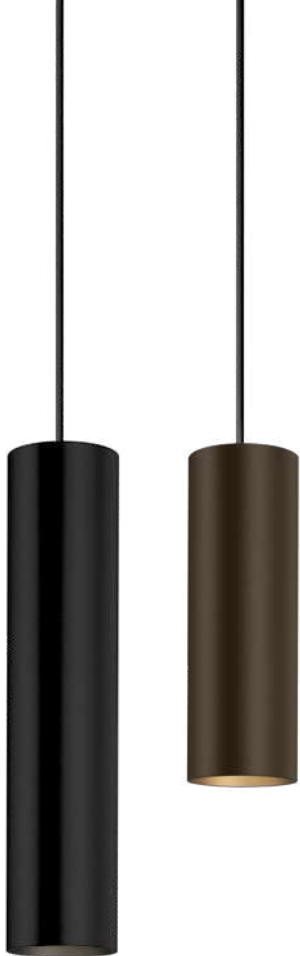

2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable
others – black cable


⊕ IP20  M-36° L80|55K

2.0	CHF	CODE
200mm 	245,65	226764W_
	255,30	226764L_
	255,30	226764G_
	255,30	226764M_
	255,30	226764Q_
	255,30	226764P_
	245,65	226764B_

3.0	CHF	CODE
300mm 	253,95	226864W_
	263,60	226864L_
	263,60	226864G_
	263,60	226864M_
	263,60	226864Q_
	263,60	226864P_
	253,95	226864B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	425 >90	5
2000-3000K	570 >90	9



LED module 20 years replaceability



back

RAY

High voltage
Ceiling suspended



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

 ⊕ IP20

2.0	CHF	CODE
200mm 	127,00	227720W0
	136,65	227720L0
	136,65	227720G0
	136,65	227720M0
	136,65	227720Q0
	136,65	227720P0
	127,00	227720B0

3.0	CHF	CODE
300mm 	135,25	227820W0
	144,90	227820L0
	144,90	227820G0
	144,90	227820M0
	144,90	227820Q0
	144,90	227820P0
	135,25	227820B0

OPTIONAL




PAR16 6.1W | GU10 | phase-cut dim

	CHF	CODE
 2700K 445lm	22,80	901228W3
 2700K 440lm	22,80	901228B3
 3000K 465lm	22,80	901228W5
 3000K 460lm	22,80	901228B5

more lamps and info on page 905




RESTAURANT GOLDMARIE | LUKAS NOBILI MAINZ GERMANY



353 | 379



379 | 353



599

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110G0
	40,05	914110Q0
	40,05	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base

more infos on page 528

	CHF	CODE
	231,85	287120WW0
	231,85	287120GG0
	231,85	287120QQ0
	231,85	287120BL0
	231,85	287120BG0
	231,85	287120BB0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905

	CHF	CODE
	233,25	287320WW0
	233,25	287320GG0
	233,25	287320QQ0
	233,25	287320BL0
	233,25	287320BG0
	233,25	287320BB0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



back




HOTEL MEERBERG PERTISAU | AUSTRIA



ODREY

High voltage
Ceiling suspended



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable



CHOOSE YOUR BASE

		CHF	CODE
AH Single base			
ceiling base round ø83			
	CHF		CODE
	40,05		914110W0
	40,05		914110L0
	40,05		914110G0
	40,05		914110Q0
	40,05		914110B0

		CHF	CODE
		322,95	287220WW0
		322,95	287220GG0
		322,95	287220QQ0
		322,95	287220BL0
		322,95	287220BG0
		322,95	287220BB0

- BH | Semi recessed single base
- CH | Invisible single base
- DH | Multi base round
- EH | Multi base linear
- FH | Multi chandelier
- GH | Track adapter
- IH | Wall base

more infos on page 528



OPTIONAL

		CHF	CODE
	2700K 445lm	22,80	901228W3
	2700K 440lm	22,80	901228B3
	3000K 465lm	22,80	901228W5
	3000K 460lm	22,80	901228B5

more lamps and info on page 905








CAFÉ APOTHEKA | KIDS STUDIOS TÜBINGEN | GERMANY





CECI PICCOLA CUCINA | STUDIOZERO85 PESCARA | ITALY



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable



1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable



1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable



CHOOSE YOUR BASE

AH Single base		
ceiling base round ø83		
	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110G0
	40,05	914110Q0
	40,05	914110B0

BH Semi recessed single base			
CH Invisible single base			
DH Multi base round			
EH Multi base linear			
FH Multi chandelier			
GH Track adapter			
IH Wall base			

more infos on page 528

	CHF	CODE
	242,90	287420WW0
	242,90	287420GG0
	242,90	287420QQ0
	242,90	287420BL0
	242,90	287420BG0
	242,90	287420BB0

OPTIONAL

PAR16 6.1W GU10 phase-cut dim			
	CHF	CODE	
2700K 445lm	22,80	901228W3	
2700K 440lm	22,80	901228B3	
3000K 465lm	22,80	901228W5	
3000K 460lm	22,80	901228B5	

more lamps and info on page 905

	CHF	CODE
	247,05	287520WW0
	247,05	287520GG0
	247,05	287520QQ0
	247,05	287520BL0
	247,05	287520BG0
	247,05	287520BB0

OPTIONAL

PAR16 6.1W GU10 phase-cut dim			
	CHF	CODE	
2700K 445lm	22,80	901228W3	
2700K 440lm	22,80	901228B3	
3000K 465lm	22,80	901228W5	
3000K 460lm	22,80	901228B5	

more lamps and info on page 905

	CHF	CODE
	248,40	287620WW0
	248,40	287620GG0
	248,40	287620QQ0
	248,40	287620BL0
	248,40	287620BG0
	248,40	287620BB0

OPTIONAL

PAR16 6.1W GU10 phase-cut dim			
	CHF	CODE	
2700K 445lm	22,80	901228W3	
2700K 440lm	22,80	901228B3	
3000K 465lm	22,80	901228W5	
3000K 460lm	22,80	901228B5	

more lamps and info on page 905

optional inner cover on page 910

ODREY

High voltage
Ceiling suspended



353 | 379



599



RESTAURANT WEINTRÄNE | MICHAEL FALTENBACHER CREATION & CONCEPT MUNICH | GERMANY



red dot winner 2023



CHOOSE YOUR BASE

AH Single base		
ceiling base round ø83		
	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110M0
	40,05	914110B0


- BH | Semi recessed single base**
- CH | Invisible single base**
- DH | Multi base round**
- EH | Multi base linear**
- FH | Multi chandelier**
- GH | Track adapter**
- IH | Wall base**
- more infos on page 528



back

TRACE

High voltage
Ceiling suspended



1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable



	CHF	CODE
	162,85	2538E0W0
	168,40	2538E0BL0
	168,40	2538E0BM0
	162,85	2538E0B0

OPTIONAL

G95 4.5W E27 phase-cut dim clear		
	CHF	CODE
2700K 375lm	45,55	9003E160
G95 10W E27 phase-cut dim opal		
	CHF	CODE
2700K 1060lm	45,55	9003E163
G95 5.4W E27 phase-cut dim filament gold tinted		
	CHF	CODE
2200K 380lm	45,55	9003E111



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



WETRO

High voltage
Ceiling suspended



CHOOSE YOUR BASE


AH | Single base
ceiling base round | ø83

	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110B0

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528



LOXONE VERSIONS ONLINE
weverducre.com/wetro



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request


 IP20 L80|50K

1800-2850K | CRI >90 | 375lm

	CHF	CODE
	412,65	236188P9

1800-2850K | >90 CRI | 525lm

	CHF	CODE
	411,25	236188B9



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request


 IP20 L80|50K

1800-2850K | CRI >90 | 385lm

	CHF	CODE
	465,10	236288P9

1800-2850K | >90 CRI | 510lm

	CHF	CODE
	463,70	236288B9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request


 IP20 L80|50K

1800-2850K | CRI >90 | 445lm

	CHF	CODE
	539,60	236388P9

1800-2850K | >90 CRI | 530lm

	CHF	CODE
	538,20	236388B9





WETRO




High voltage
Ceiling suspended



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110B0



BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528



LOXONE VERSIONS ONLINE
weverducre.com/wetro

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80/50K

1800-2850K | CRI >90 | 615lm

	CHF	CODE
	466,45	236188TS9

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80/50K

1800-2850K | CRI >90 | 510lm

	CHF	CODE
	571,35	236288TS9

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80/50K

1800-2850K | CRI >90 | 530lm

	CHF	CODE
	652,75	236388TS9



WETRO

High voltage
Ceiling suspended




CHOOSE YOUR BASE

AH Single base ceiling base round ø83		
	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110B0

- BH | Semi recessed single base**
 - CH | Invisible single base**
 - DH | Multi base round**
 - EH | Multi base linear**
 - FH | Multi chandelier**
 - GH | Track adapter**
 - IH | Wall base**
- more infos on page 528



LOXONE VERSIONS ONLINE
weverducre.com/wetro




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80/50K

1800-2850K | CRI >90 | 520lm

	CHF	CODE
	466,45	236188TD9
	466,45	236188YD9
	466,45	236188GD9
	466,45	236188BD9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80/50K

1800-2850K | CRI >90 | 480lm

	CHF	CODE
	571,35	236288TD9
	571,35	236288YD9
	571,35	236288GD9
	571,35	236288BD9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80/50K

1800-2850K | CRI >90 | 495lm

	CHF	CODE
	652,75	236388TD9
	652,75	236388YD9
	652,75	236388GD9
	652,75	236388BD9






PRIVATE RESIDENCE | ANA TERRA ITALY



WETRO

High voltage
Ceiling suspended




CHOOSE YOUR BASE

AH Single base		
ceiling base round ø83		
	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110Q0
	40,05	914110B0

- BH | Semi recessed single base
 - CH | Invisible single base
 - DH | Multi base round
 - EH | Multi base linear
 - FH | Multi chandelier
 - GH | Track adapter
 - IH | Wall base
- more infos on page 528



LOXONE VERSIONS ONLINE
weverducre.com/wetro




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80|50K

1800-2850K CRI >90 495lm		
	CHF	CODE
	466,45	236188TW9

1800-2850K CRI >90 455lm		
	CHF	CODE
	466,45	236188DW9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80|50K

1800-2850K CRI >90 435lm		
	CHF	CODE
	571,35	236288TW9

1800-2850K CRI >90 420lm		
	CHF	CODE
	571,35	236288DW9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

 IP20 L80|50K

1800-2850K CRI >90 455lm		
	CHF	CODE
	652,75	236388TW9

1800-2850K CRI >90 440lm		
	CHF	CODE
	652,75	236388DW9





PRIVATE RESIDENCE | MD STUDIO MARIA DECU ROMANIA



CLEA


High voltage
Ceiling suspended



287




631



1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request


⊕ IP20 L80/50K



2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

⊕ IP20 L80/50K



3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

⊕ IP20 L80/50K

CHOOSE YOUR BASE

AH | Single base

ceiling base round | ø83

	CHF	CODE
	40,05	914110W0
	40,05	914110L0

BH | Semi recessed single base

CH | Invisible single base

DH | Multi base round

EH | Multi base linear

FH | Multi chandelier

GH | Track adapter

IH | Wall base

more infos on page 528

	CHF	CODE
	405,75	281784W_
	436,10	281784SG_
	436,10	281784FJ_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	780 >90	3
3000K	825 >90	5

	CHF	CODE
	598,95	281884W_
	643,10	281884SG_
	643,10	281884FJ_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	780 >90	3
3000K	825 >90	5

	CHF	CODE
	764,55	281984W_
	811,45	281984SG_
	811,45	281984FJ_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	770 >90	3
3000K	815 >90	5



back




PRIVATE RESIDENCE GREECE



PRIVATE RESIDENCE | ERIBO STIJLBOUWERS BELGIUM




PRIVATE RESIDENCE | ARCHITEKTI MIKULAJ & MIKULAJOVA SLOVAKIA



3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request



CHOOSE YOUR BASE

AH | Single base

ceiling base round | ø83

	CHF	CODE
	356,05	237388W9
	361,60	237388J9
	361,60	237388SG9
	361,60	237388ME9
	361,60	237388P9
	361,60	237388K9
	361,60	237388Z9

BH | Semi recessed single base

CH | Invisible single base

DH | Multi base round

EH | Multi base linear

FH | Multi chandelier

GH | Track adapter

IH | Wall base


more infos on page 528



LOXONE VERSIONS ONLINE
weverducre.com/more-shiek

SHIEK

High voltage
Ceiling suspended



3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium
white cable on request



	CHF	CODE
	241,50	2343E0W0
	247,05	2343E0J0
	247,05	2343E0SG0
	247,05	2343E0ME0
	247,05	2343E0P0
	247,05	2343E0K0
	247,05	2343E0Z0

OPTIONAL

	CHF	CODE
A60 9W opal E27 phase-cut dim		
2700K 800lm	20,05	9003E152



PRIVATE RESIDENCE | ZEIT ARCHITECTS SLOVAKIA



DINOR

High voltage
Ceiling suspended



CHOOSE YOUR BASE

AH Single base ceiling base round ø83		
	CHF	CODE
	40,05	914110W0
	40,05	914110L0
	40,05	914110B0

BH | Semi recessed single base
CH | Invisible single base
more infos on page 528



LOXONE VERSIONS ONLINE
weverducre.com/more-dinor




1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

 IP20 L80|60K

1800-2850K | CRI >90 | 570lm

	CHF	CODE
	531,30	255188GW9
	531,30	255188BG9
	507,85	255188BB9




2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

 IP20 L80|60K

1800-2850K | CRI >90 | 750lm

	CHF	CODE
	627,90	255288GW9
	627,90	255288BG9
	586,50	255288BB9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

 IP20 L80|60K

1800-2850K | CRI >90 | 830lm

	CHF	CODE
	712,10	255388GW9
	712,10	255388BG9
	666,55	255388BB9





RESTAURANT VINA | INNOCAD ARCHITECTURE GRAZ | AUSTRIA





SPOT
LIGHTS



LECA SNOOZE
569



MATCH SNOOZE
571

GUIDE
LIGHTS



RETO 0.8
573



RETO 2.0
573



LITO 1.0
575



LITO 2.0
575



STRIPE SLIM
577



STRIPE
579



ORIS 0.7
581



ORIS 0.8
581



ORIS 1.3
581




1.0 SEMI RECESSED

LED COB 5W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | incl. honeycomb
fits standard installation box Ø 68

⊕ IP20 0°-90°|350° ⚡ N-17° L80|50K



⌚ 68-71 ⏏ 36 ⚡ 5-40

	CHF	CODE
	379,50	188544W3
	407,10	188544Q3
	379,50	188544B3





PRIVATE RESIDENCE | STUDIO BINNEN NETHERLANDS




1.0 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | installation box

⊕ IP20 0°-90°|350° ⚡ M-23° L80|50K





41x190 1155 €12.5-32.5

2700K CRI >90 240lm		
	CHF	CODE
	379,50	177554W3
	407,10	177554L3
	407,10	177554M3
	407,10	177554Q3
	379,50	177554B3



MATCH snooze

Wall recessed 61 | 137 | 153



1.1 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
installation box

⊕ IP20 0°-90°|350° ⚡ M-23° L80|50K

41x190 1155 €12.5-32.5



2700K CRI >90 240lm		
	CHF	CODE
	338,10	177654W3
	338,10	177654B3



PRIVATE RESIDENCE | STUDIO PALINPERÄ FINLAND

RETO

Wall recessed



0.8

LED PCB 4W | 350mA | 9V
aluminium

IP20 L80|50K

66x66 40 min. 12

3000K | CRI >90 | 145lm

	CHF	CODE
	113,20	3451A1W5
	135,25	3451A1L5
	135,25	3451A1M5
	135,25	3451A1Q5
	113,20	3451A1B5

2.0

LED PCB 6W | 350mA | 17V
aluminium

IP20 L80|50K

47x182 40 min. 12

3000K | CRI >90 | 455lm

	CHF	CODE
	168,40	3452A1W5
	168,40	3452A1B5

ALWAYS USE

driver | 350mA

	CHF	CODE
6W	48,30	90213202

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CHF	CODE
	63,50	90012047

concrete housing

	CHF	CODE
	44,20	90012046

specs on page 914

ALWAYS USE

driver | 350mA

	CHF	CODE
6W	48,30	90213202

more options and specs on page 896

OPTIONAL



recessed housing incl. plasterkit

	CHF	CODE
	62,10	90012039

concrete housing

	CHF	CODE
	52,45	90012044


specs on page 914



LOXONE VERSION ONLINE
weverducre.com/more-reto





LOXONE VERSION ONLINE
weverducre.com/more-lito



LITO

Wall recessed



1.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 170/235lm

	CHF	CODE
	85,60	145381W5
	85,60	145381A5
	85,60	145381B5

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
6W 500mA	45,55	90214201

more options and specs on page 896

OPTIONAL

	CHF	CODE
recessed housing	36,60	90012027
plasterkit	22,80	90017119

recessed housing | always use in
combination with plasterkit

2.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 85/115lm

	CHF	CODE
	85,60	1454A1W5
	85,60	1454A1A5
	85,60	1454A1B5

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
6W 500mA	45,55	90214201

more options and specs on page 896

OPTIONAL

	CHF	CODE
recessed housing	36,60	90012027
plasterkit	22,80	90017119

recessed housing | always use in
combination with plasterkit




PRIVATE RESIDENCE SPAIN



STRIPE SLIM

Wall recessed



1.4

LED PCB 2W | const. volt. | 24V
aluminium

IP20 L70|60K

135x9 118 8-18

3000K | CRI >80 | 15lm

	CHF	CODE
	93,85	3058A1W5
	93,85	3058A1B5

ALWAYS USE

driver | phase-cut dim
min. 2 luminaires per driver



	CHF	CODE
25W	63,50	90222701

revision opening required

more options and specs on page 901



LOXONE VERSION ONLINE
weverducre.com/more-stripe

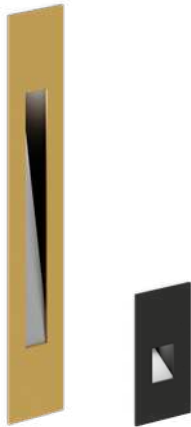

0.4

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 TL 40 8-18

3000K | CRI >80 | 15/28lm

	CHF	CODE
	75,90	3054A1WA4
	77,30	3054A1LA4
	77,30	3054A1GA4
	75,90	3054A1BA4

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
6W 700mA	47,65	90215203


more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CHF	CODE
	33,15	90012037

driver to be placed externally
specs on page 914



0.7

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 TL 40 8-18

3000K | CRI >80 | 15/28lm

	CHF	CODE
	80,05	3055A1WA4
	81,45	3055A1LA4
	81,45	3055A1GA4
	80,05	3055A1BA4

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
6W 700mA	47,65	90215203

more options and specs on page 896

OPTIONAL


recessed housing incl. plasterkit

	CHF	CODE
	33,15	90012037

driver to be placed externally
specs on page 914

STRIPE

Wall recessed



2.2

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x170 TL 40 8-18

3000K | CRI >80 | 20/36lm

	CHF	CODE
	121,45	3056A1WA4
	122,85	3056A1LA4
	122,85	3056A1GA4
	121,45	3056A1BA4

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
6W 700mA	47,65	90215203

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	CHF	CODE
	59,35	90012038


specs on page 914



LOXONE VERSION ONLINE
weverducre.com/more-oris

ORIS

Wall recessed



0.7

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP20 L70|60K

47x182 40 min. 12

	CHF	CODE
	104,90	3271A1W5
	104,90	3271A1B5

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
6W 700mA	47,65	90215203

more options and specs on page 896

OPTIONAL


recessed housing incl. plasterkit

	CHF	CODE
	62,10	90012039

concrete housing

	CHF	CODE
	52,45	90012044

specs on page 914



0.8

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP20 L70|60K

66x66 40 min. 12

	CHF	CODE
	93,85	3274A1W5
	93,85	3274A1B5

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
6W 700mA	47,65	90215203

more options and specs on page 896

OPTIONAL


recessed housing incl. plasterkit

	CHF	CODE
	63,50	90012047

concrete housing

	CHF	CODE
	44,20	90012046

specs on page 914



1.3

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP20 L70|60K

115x117 40 min. 12

	CHF	CODE
	122,85	3276A1W5
	122,85	3276A1B5

ALWAYS USE

driver

	CHF	CODE
6W 350mA	48,30	90213202
7W 700mA	50,40	90215301

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit




	CHF	CODE
	71,80	90012041

concrete housing

	CHF	CODE
	53,85	90012040

specs on page 914

LUMINAIRES

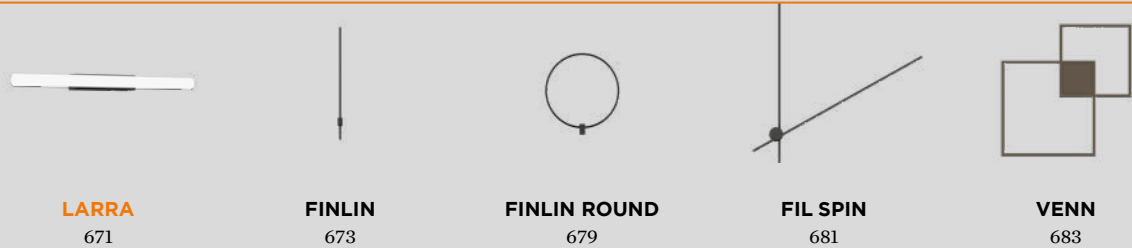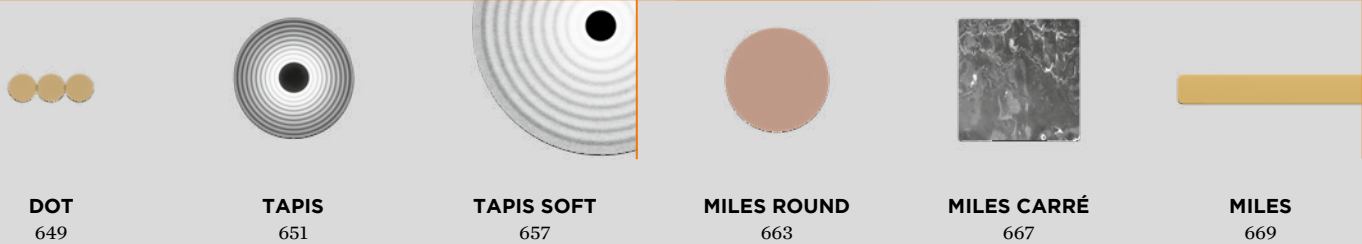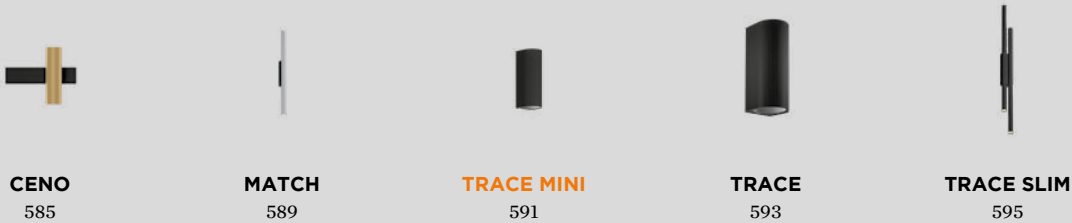

SPOT LIGHTS



UPLIGHTS



IP-RATED








FRENCH VILLAGE CAFÉ & BISTRO | LARA WOODS WOZNICA BELFAST | UNITED KINGDOM



LOXONE VERSIONS ONLINE
weverducre.com/more-ceno-wall

CENO

Wall surface

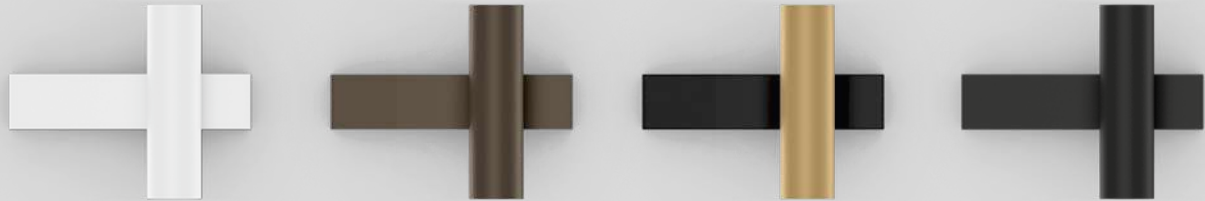

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⏸ ⚡ M-31° L70|55K





OPTIONAL

honeycomb louver		CHF	CODE
		20,05	915230B0

	CHF	CODE
	269,10	376264W_
	269,10	376264Q_
	269,10	376264CH_
	269,10	376264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x260 >90	3
3000K	2x270 >90	5



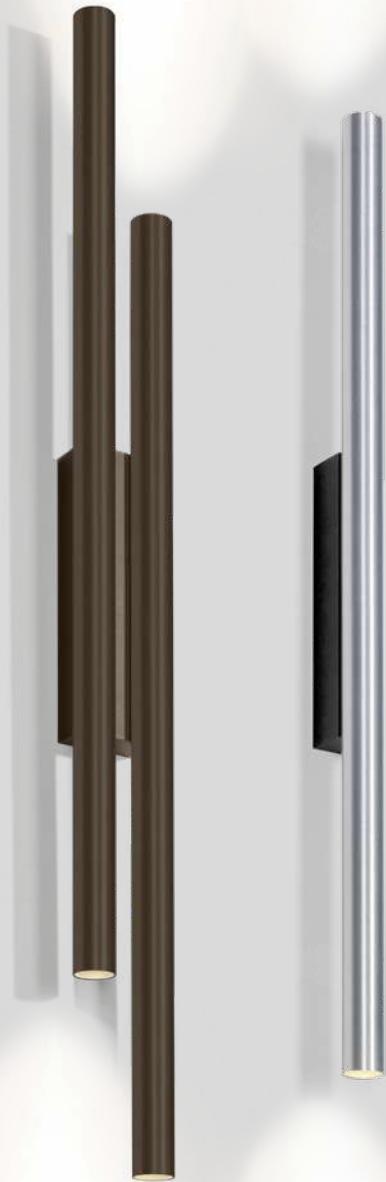

2.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


⊕ IP20 ⌵ ⚡ M-23° L80|50K

	CHF	CODE
	260,85	377264W_
	260,85	377264BL
	260,85	377264Q_
	260,85	377264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x415 >90	3
3000K	2x440 >90	5

MATCH

Wall surface 61 | 137 | 153



4.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⌵ ⚡ M-23° L80|50K


	CHF	CODE
	397,45	377464W_
	397,45	377464Q_
	397,45	377464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x415 >90	3
3000K	4x440 >90	5



TRACE mini




Wall surface



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ▾ ▴ ⚡ M-30° L80|50K



	CHF	CODE
	241,50	333654W_
	245,65	333654MB_
	245,65	333654BM_
	241,50	333654B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	420 >90	5

2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⏸ ⚡ M-30° L80|50K

	CHF	CODE
	320,20	333754W_
	328,45	333754MB_
	328,45	333754BM_
	320,20	333754B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	840 >90	3
3000K	840 >90	5



reddot winner 2023

TRACE

Wall surface





261 | 269 | 273



351




511 | 547



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ▾ ▴ ⚡ M-22° L80|50K



W



H



CH



B

	CHF	CODE
	255,30	333164W_
	259,45	333164H_
	259,45	333164CH_
	255,30	333164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	575 >90	3
3000K	645 >90	5

2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


⊕ IP20 ⏸ ⚡ M-22° L80|50K

	CHF	CODE
	347,80	333264W_
	356,05	333264H_
	356,05	333264CH_
	347,80	333264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x560 >90	3
3000K	2x615 >90	5





back

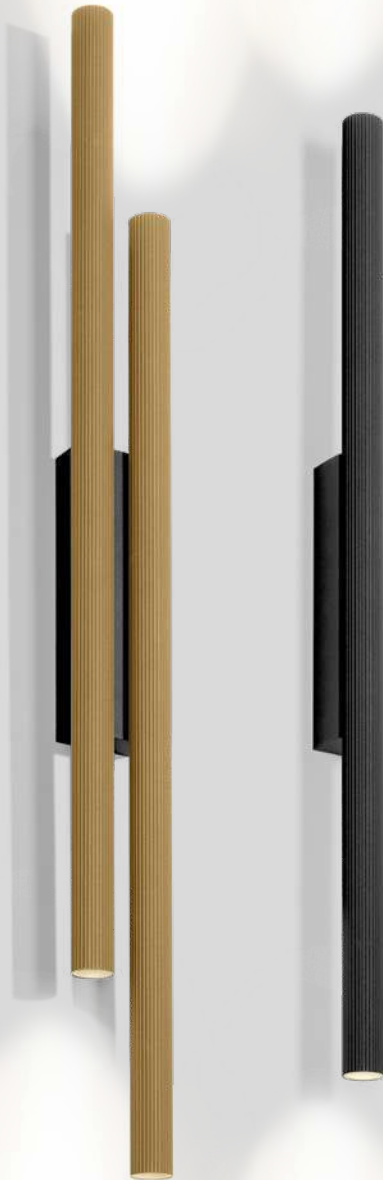

TRACE SLIM

Wall surface

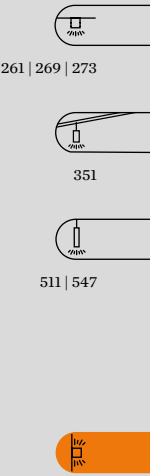


1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⌂ M-23° L80|50K

	CHF	CODE
	302,25	333364CH_
	296,70	333364B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x395 >90	3
3000K	2x420 >90	5



2.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⌂ M-23° L80|50K

	CHF	CODE
	467,85	333464CH_
	452,65	333464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x395 >90	3
3000K	4x420 >90	5




PALATE WOMEN | SUPER ESPACE FOSSES-LA-VILLE | BELGIUM





PRIVATE RESIDENCE | TIPHAINE MODIN FRANCE



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel




	CHF	CODE
	186,30	387120WW0
	186,30	387120QQ0
	186,30	387120GB0
	186,30	387120BL0
	186,30	387120BG0
	186,30	387120BB0

OPTIONAL

	CHF	CODE
	2700K 445lm	22,80 901228W3
	2700K 440lm	22,80 901228B3
	3000K 465lm	22,80 901228W5
	3000K 460lm	22,80 901228B5

more lamps and info on page 905



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel




	CHF	CODE
	196,00	387220WW0
	196,00	387220QQ0
	196,00	387220GB0
	196,00	387220BL0
	196,00	387220BG0
	196,00	387220BB0

OPTIONAL

	CHF	CODE
	2700K 445lm	22,80 901228W3
	2700K 440lm	22,80 901228B3
	3000K 465lm	22,80 901228W5
	3000K 460lm	22,80 901228B5

more lamps and info on page 905



1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel



	CHF	CODE
	200,10	387320WW0
	200,10	387320QQ0
	200,10	387320GB0
	200,10	387320BL0
	200,10	387320BG0
	200,10	387320BB0


OPTIONAL

	CHF	CODE
	2700K 445lm	22,80 901228W3
	2700K 440lm	22,80 901228B3
	3000K 465lm	22,80 901228W5
	3000K 460lm	22,80 901228B5


more lamps and info on page 905



WW



QQ



GB



BL




BG



BB




MORE VERSIONS ONLINE
weverducre.com/more-odrey-wall



back

ODREY

Wall surface



353 | 379



517 | 539






CABINET DENTAIRE VAUBAN | DAHDAH STUDIO VAUBAN | FRANCE

ODREY


Wall surface




2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20



MORE VERSIONS ONLINE
weverducre.com/more-odrey-wall



2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel


IP20

	CHF	CODE
	273,25	387520WW0
	273,25	387520QQ0
	273,25	387520GB0
	273,25	387520BL0
	273,25	387520BG0
	273,25	387520BB0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	CHF	CODE
	281,55	387620WW0
	281,55	387620QQ0
	281,55	387620GB0
	281,55	387620BL0
	281,55	387620BG0
	281,55	387620BB0

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



back

stars



weverducre.com/universalstars


SIMPLE FORMALITY

Auch wenn Mathematik nicht Ihr Lieblingsfach war: BOX, DOCUS, HEXO und RAY werden Sie begeistern. Die eleganten, schlanken Leuchten passen in fast jede Raumsituation – ob an Decke oder Wand, innen oder außen. In vielen Farben und Varianten erhältlich, sorgen sie überall für einen echten Wow-Effekt.


Même si les mathématiques n'étaient pas votre matière préférée, BOX, DOCUS, HEXO et RAY sauront vous séduire. Élégants et fins, ces luminaires s'adaptent à presque tous les espaces – plafond ou mur, intérieur ou extérieur. Disponibles en de nombreuses versions et couleurs, ils créent partout un véritable effet « wow ».



BOX



DOCUS



HEXO



RAY






PRIVATE RESIDENCE BELGIUM

BOX mini

Wall surface



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium




	CHF	CODE
	92,50	300120W
	93,85	300120L0
	93,85	300120G0
	93,85	300120M0
	93,85	300120Q0
	92,50	300120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

		CHF	CODE
2700K	445lm	22,80	901228W3
2700K	440lm	22,80	901228B3
3000K	465lm	22,80	901228W5
3000K	460lm	22,80	901228B5

more lamps and info on page 905



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium




	CHF	CODE
	121.45	301120W0
	124.20	301120L0
	124.20	301120G0
	124.20	301120M0
	124.20	301120Q0
	121.45	301120B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

		CHF	CODE
2700K	445lm	22,80	901228W3
2700K	440lm	22,80	901228B3
3000K	465lm	22,80	901228W5
3000K	460lm	22,80	901228B5

more lamps and info on page 905






PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE THE NETHERLANDS



LOXONE VERSIONS ONLINE
weverducre.com/more-box-wall

BOX

Wall surface



1.0 LED


LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⚡ L80|55K

	CHF	CODE
	265,65	341168W_
	269,80	341168L_
	269,80	341168G_
	269,80	341168M_
	269,80	341168Q_
	265,65	341168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5
1800-2850K	330 >90	9



2.0 LED


LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⚡ L80|55K

	CHF	CODE
	298,10	341148W_
	302,25	341148L_
	302,25	341148G_
	302,25	341148M_
	302,25	341148Q_
	298,10	341148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5
1800-2850K	2x410 >90	9



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⚡

	CHF	CODE
	150,45	3211G0W0
	154,60	3211G0L0
	154,60	3211G0G0
	154,60	3211G0M0
	154,60	3211G0Q0
	150,45	3211G0B0

OPTIONAL

flaps for adjustable beam angle

	CHF	CODE
	53,85	900401W0

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805




235




335




311



765




815




back



Wall surface



PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



	CHF	CODE
	122,85	301320W0
	125,60	301320G0
	122,85	301320B0

PAR16 6.1W | GU10 | phase-cut dim

more lamps and info on page 905

PAR16 6.1W | GU10 | phase-cut dim



more lamps and info on page 905





HEXO mini

Wall surface

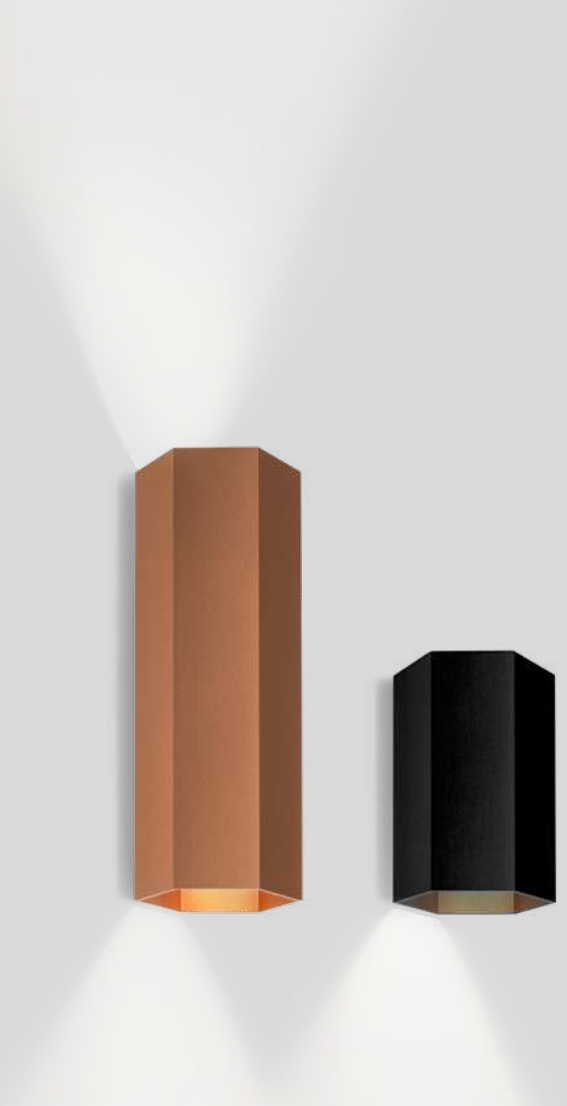

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



	CHF	CODE
	93,85	300420G0
	93,85	300420Q0
	93,85	300420P0
	92,50	300420B0

OPTIONAL

	CHF	CODE
 2700K 445lm	22,80	901228W3
 2700K 440lm	22,80	901228B3
 3000K 465lm	22,80	901228W5
 3000K 460lm	22,80	901228B5

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



	CHF	CODE
	125,60	301420G0
	125,60	301420Q0
	125,60	301420P0
	122,85	301420B0

OPTIONAL

	CHF	CODE
 2700K 445lm	22,80	901228W3
 2700K 440lm	22,80	901228B3
 3000K 465lm	22,80	901228W5
 3000K 460lm	22,80	901228B5

more lamps and info on page 905






DE BRINK VAN PARK BOSWIJK | STUDIO ID+ DOORN | THE NETHERLANDS



LOXONE VERSIONS ONLINE
weverducre.com/more-ray-wall



1.0 LED


LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

⊕ IP20 ▾ ▴ L80/55K

	CHF	CODE
	265,65	342168W_
	269,80	342168G_
	269,80	342168M_
	269,80	342168Q_
	265,65	342168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5
1800-2850K	330 >90	9



2.0 LED


LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⌂ L80/55K

	CHF	CODE
	298,10	342148W_
	302,25	342148G_
	302,25	342148M_
	302,25	342148Q_
	298,10	342148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5
1800-2850K	2x410 >90	9



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

⊕ IP20 ⌂

	CHF	CODE
	150,45	3221G0W0
	154,60	3221G0G0
	154,60	3221G0M0
	154,60	3221G0Q0
	150,45	3221G0B0

OPTIONAL

flaps for adjustable beam angle

	CHF	CODE
	53,85	900401W0

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805



251



341 | 377 | 393



537



759





805



CENTRAL

Wall surface



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ▾ ▴ L80|60K

	CHF	CODE
	270,50	313574W_
	273,25	313574L_
	273,25	313574G_
	270,50	313574B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >90	3
3000K	620 >90	5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⌂ L80|60K

	CHF	CODE
	328,45	313674W_
	334,00	313674L_
	334,00	313674G_
	328,45	313674B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x310 >90	3
3000K	2x330 >90	5



OFFICE CEEBE | WEYGERS HASSELT | BELGIUM

LEENS

Wall surface



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⚡ L80/60K

3000K | CRI >90 | 525lm

	CHF	CODE
	351,90	311174W5
	379,50	311174L5
	351,90	311174B5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 ⚡ L80/60K


3000K | CRI >90 | 2x320lm

	CHF	CODE
	407,10	311274W5
	448,50	311274L5
	407,10	311274B5



BENTO

Wall surface




1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 L80/60K

3000K CRI >90 285lm		
	CHF	CODE
	296,70	309274W5
	296,70	309274B5



3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium




⊕ IP20 L80/60K

3000K CRI >90 285lm		
	CHF	CODE
	411,25	309374W5
	411,25	309374B5



DRO

Wall surface

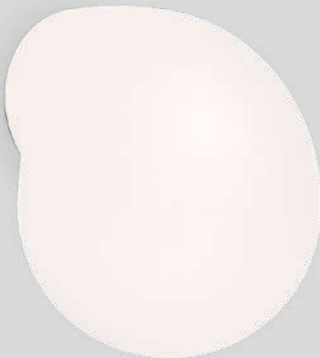

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

69-71

	CHF	CODE
	200,10	3431GOW0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

105-107

	CHF	CODE
	310,50	3432COW0


OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

	CHF	CODE
2700K 450lm	14,50	9003C103



RESTAURANT TRIANGOLO | CONIX COOL INTERIOR EDEGEM | BELGIUM

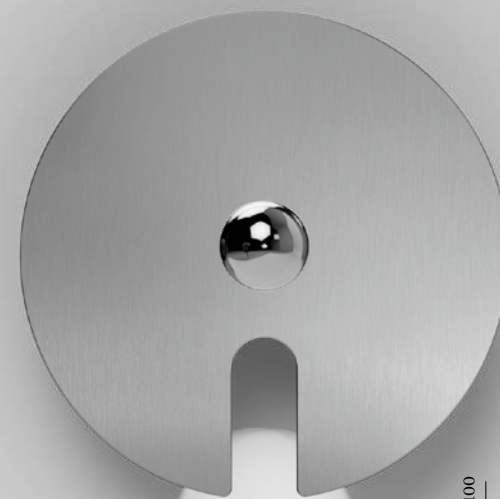

1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel



	CHF	CODE
	287,05	6321E0GB0
	287,05	6321E0NB0
	287,05	6321E0LB0
	287,05	6321E0BL0

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2700K 405lm	44,20	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 405lm	44,20	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel



	CHF	CODE
	353,30	6322E0GB0
	353,30	6322E0NB0
	353,30	6322E0LB0
	353,30	6322E0BL0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror


	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

MIRRO

Wall surface



3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel



	CHF	CODE
	574.10	6323E0GB0
	574.10	6323E0NB0
	574.10	6323E0LB0
	574.10	6323E0BL0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157



HOTEL PARK | MICHAL STAŠKO PIESTANY | SLOVAKIA



► DESIGN WITH LOVE



RESTAURANT EN VRAC MOUSCRON | BELGIUM

MIRRO SOFT

Wall surface

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CHF	CODE
White	353,30	6322E0MF0
Gold	353,30	6322E0LF0
Dark Blue	353,30	6322E0IF0
Black	353,30	6322E0AF0

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	CHF	CODE
White	574,10	6323E0MF0
Gold	574,10	6323E0LF0
Dark Blue	574,10	6323E0IF0
Black	574,10	6323E0AF0

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

G95 5.5W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 1060lm	45,55	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 375lm	45,55	9003E160

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 395lm	48,30	9003E157

G95 5.5W | E27 | phase-cut dim | opal

	CHF	CODE
2700K 1060lm	45,55	9003E163

G95 4.5W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 375lm	45,55	9003E160

13&9 DESIGN

back

WEVER & DUCRÉ 628 — 629



CLEA



Wall surface



287



557

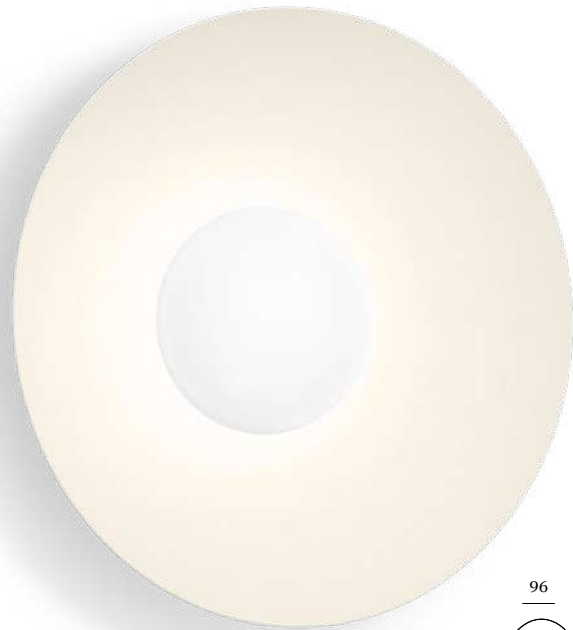


1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

⊕ IP20 L80|50K

	CHF	CODE
	396,10	181484W_
	426,45	181484LS_
	426,45	181484SG_
	426,45	181484FJ_
	396,10	181484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	575 >90	3
3000K	610 >90	5




2.0

LED COB 11W| phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

⊕ IP20 L80|50K

	CHF	CODE
	589,30	181584W_
	633,45	181584LS_
	633,45	181584SG_
	633,45	181584FJ_
	589,30	181584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	575 >90	3
3000K	610 >90	5




3.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

⊕ IP20 L80|50K

	CHF	CODE
	754,90	181684W_
	801,80	181684LS_
	801,80	181684SG_
	801,80	181684FJ_
	754,90	181684B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	565 >90	3
3000K	600 >90	5



back



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT
VINEUIL-SAINT-FIRMIN | FRANCE

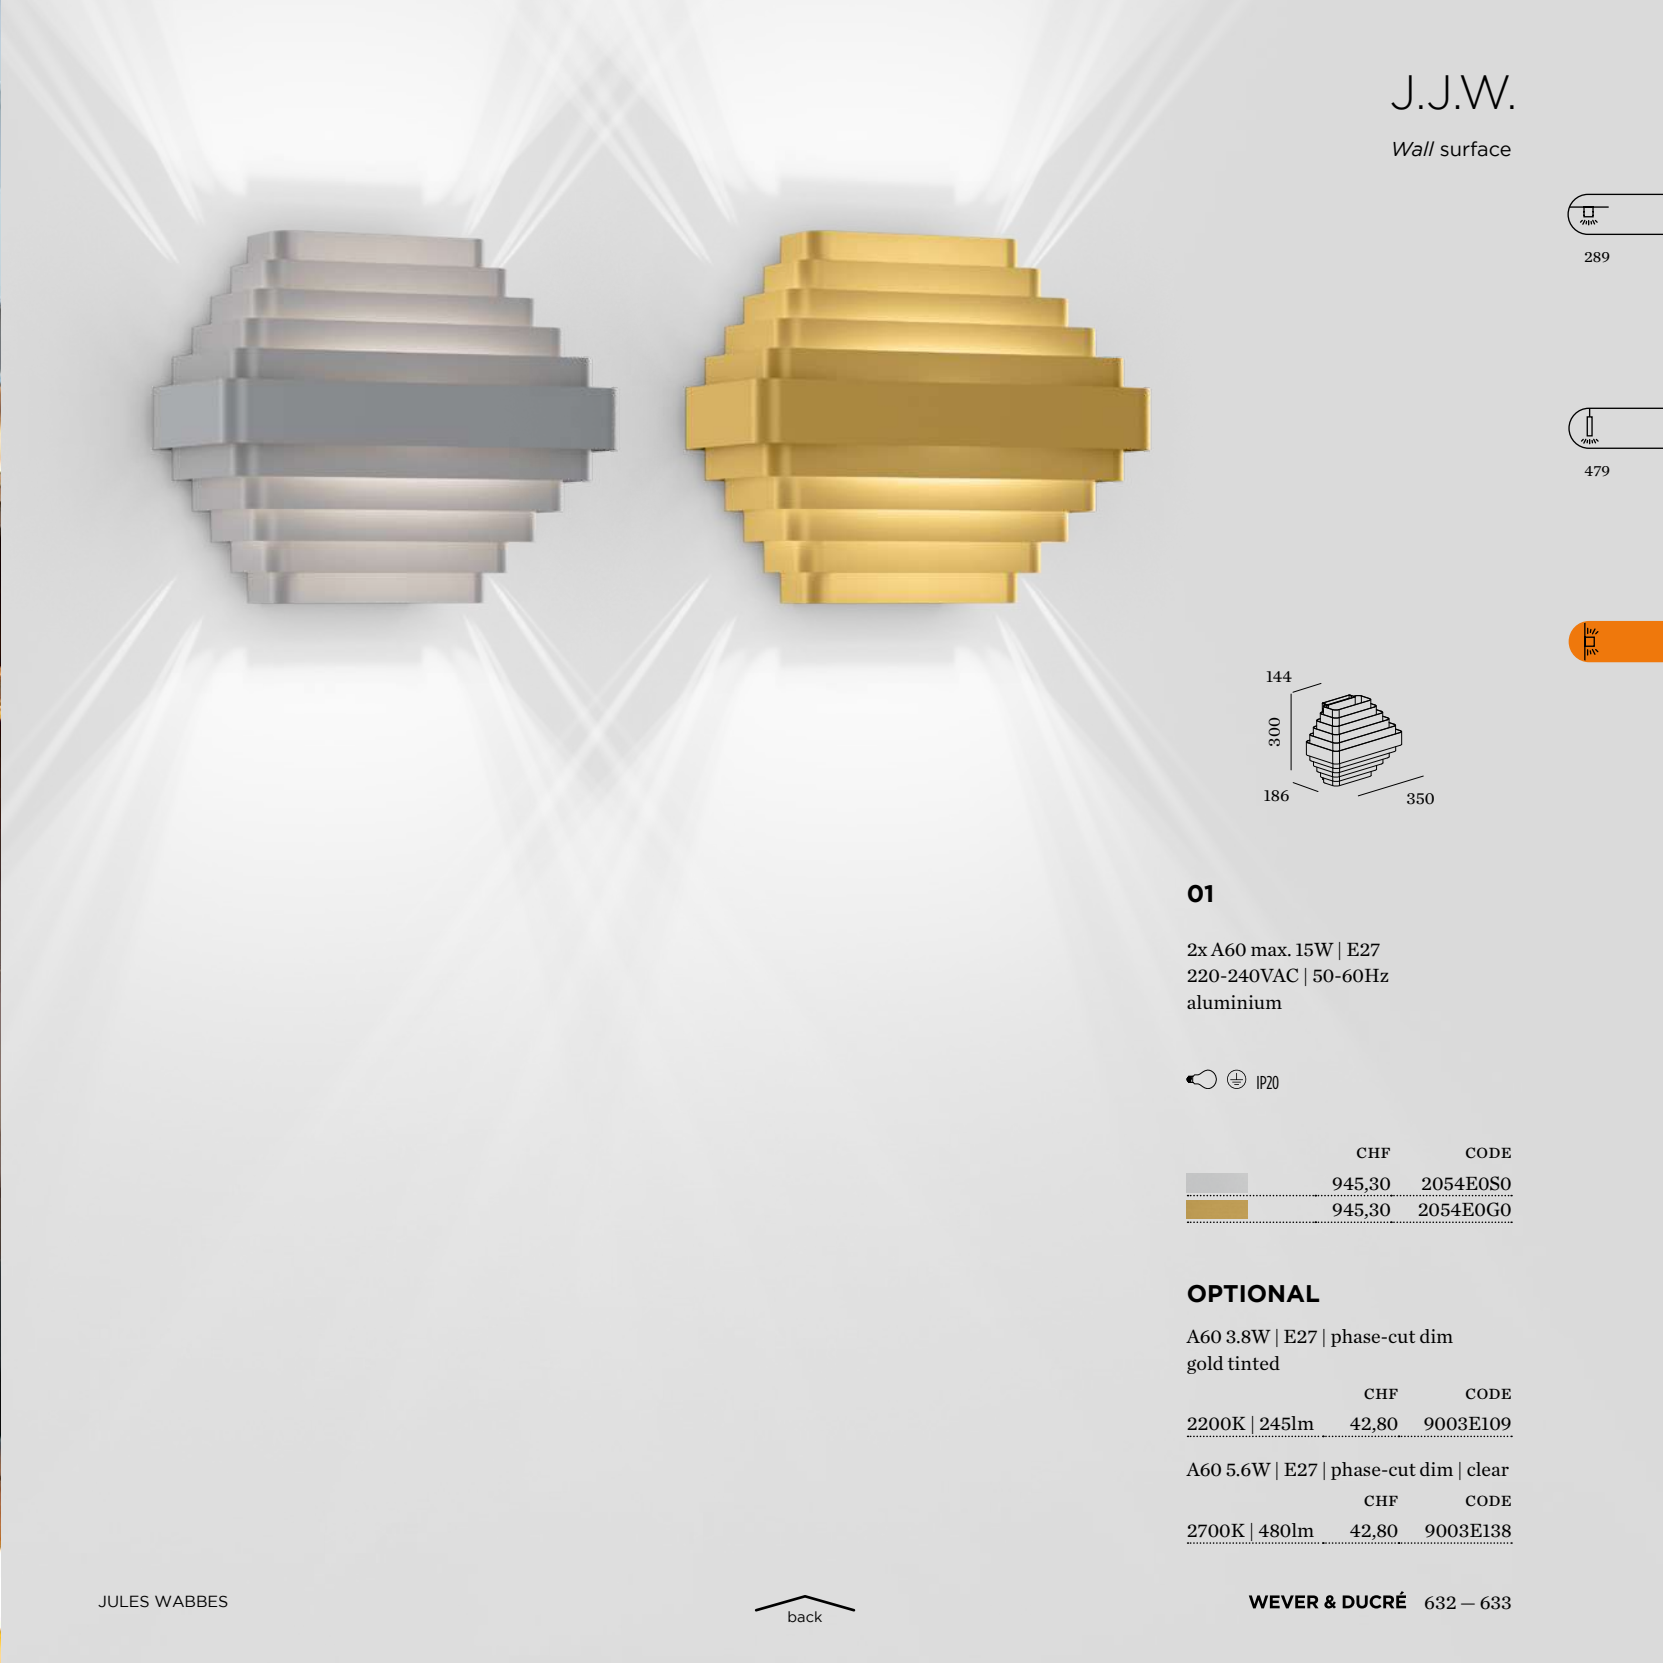


J.J.W.
Wall surface



289



479



01

2x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium



	CHF	CODE
	945,30	2054E0S0
	945,30	2054E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 245lm	42,80	9003E109

	CHF	CODE
A60 5.6W E27 phase-cut dim clear		
2700K 480lm	42,80	9003E138



FORUM OFFICE SINT-GILLIS-WAAS | BELGIUM

J.J.W.
Wall surface

289

479

72

150

187

175

02

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

⚡⊕

IP20

	CHF	CODE
	586,50	2055E0S0
	586,50	2055E0Q0
	586,50	2055E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CHF	CODE
2200K 245lm	42,80	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 480lm	42,80	9003E138

JULES WABBES

back

WEVER & DUCRÉ


634 — 635





KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO COPENHAGEN | DENMARK

reddot award 2019
winner lighting design



1.1
PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium


IP20 0°-45°

	CHF	CODE
	335,35	338120BK1
	328,45	338120BB1

OPTIONAL

	CHF	CODE
■ 2700K 440lm	22,80	901228B3
■ 3000K 460lm	22,80	901228B5

more lamps and info on page 905



3.1
PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch


IP20 0°-45°|0°-30°

	CHF	CODE
	489,90	339120BK1
	483,00	339120BB1

OPTIONAL

	CHF	CODE
■ 2700K 440lm	22,80	901228B3
■ 3000K 460lm	22,80	901228B5

more lamps and info on page 905



3.1
PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round



IP20 0°-45°|0°-30°

	CHF	CODE
	481,65	339220BK1
	474,75	339220BB1

OPTIONAL

	CHF	CODE
■ 2700K 440lm	22,80	901228B3
■ 3000K 460lm	22,80	901228B5

more lamps and info on page 905






URBAN SPACES | STUDIO KOMO STUTT GART | GERMANY



reddot award 2019
winner lighting design



4.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round


IP20 0°-45°|0°-30°

	CHF	CODE
	830,80	339620BF2
	804,55	339620BK2
	793,50	339620BB2

OPTIONAL

	CHF	CODE
2700K 440lm	22,80	901228B3
3000K 460lm	22,80	901228B5

more lamps and info on page 905



4.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round


IP20 0°-45°|0°-30°

	CHF	CODE
	937,05	339620BF3
	921,85	339620BK3
	903,90	339620BB3

OPTIONAL

	CHF	CODE
2700K 440lm	22,80	901228B3
3000K 460lm	22,80	901228B5

more lamps and info on page 905



4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30°

	CHF	CODE
	995,00	339620BK4
	978,45	339620BB4

OPTIONAL

	CHF	CODE
2700K 440lm	22,80	901228B3
3000K 460lm	22,80	901228B5

more lamps and info on page 905






PRIVATE RESIDENCE | MAADSTUDIO MAREK SVOBODA CZECH REPUBLIC

DARF

Wall surface

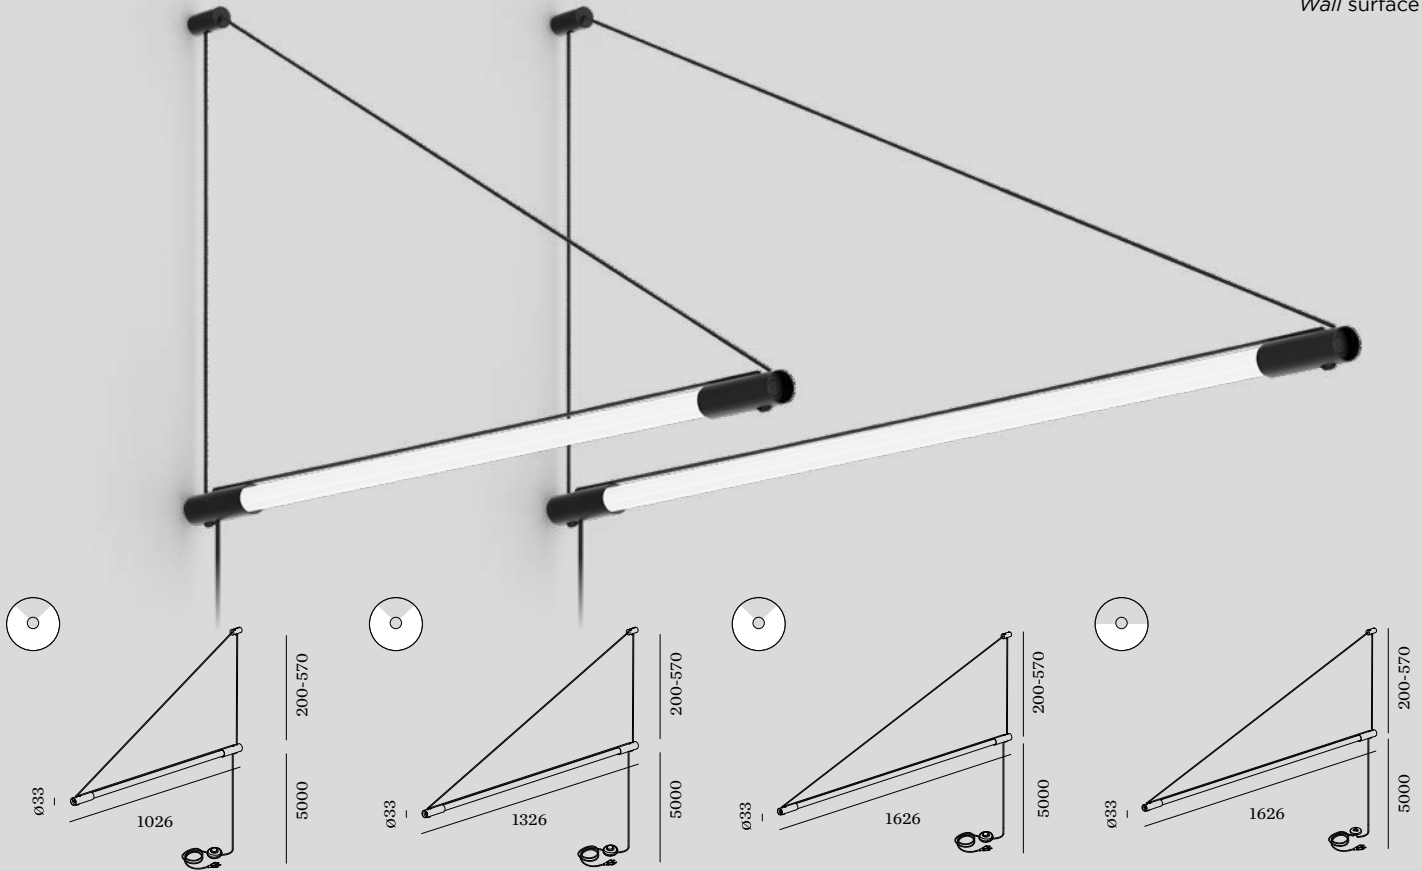

2.1

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K CRI >80 1530lm		
CHF	CODE	
354,70	2567	T7B4

3.1

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K CRI >80 2300lm		
CHF	CODE	
361,60	2566	T7B4

4.1

LED TUBE 23W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|60K

3000K CRI >80 3560lm		
CHF	CODE	
367,10	2569	T7B4

LIGHT COLOUR	LUMEN CRI	CODE
3000K	3560 >80	4
4000K	3950 >80	6

4.2

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with dimmer switch

IP20 L70|50K

2700K CRI >90 2780lm		
CHF	CODE	
448,50	2569	T8B4

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2780 >90	3
3000K	2940 >90	5






PRIVATE RESIDENCE | SERBOLI BUREAU SPAIN



CG SQUARE

Wall surface

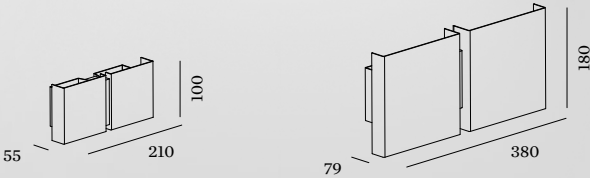

2P SMALL

QT14 2x max. 4W | G9
220-240VAC | 50-60Hz
steel



	CHF	CODE
	328,45	4001G0W0
	338,10	4001G0L0
	338,10	4001G0M0
	338,10	4001G0Q0
	328,45	4001G0B0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805

2G BIG

A60 2x max. 12W | E27
220-240VAC | 50-60Hz
steel



	CHF	CODE
	407,10	4002E0W0
	427,80	4002E0L0
	427,80	4002E0M0
	427,80	4002E0Q0
	407,10	4002E0B0

OPTIONAL

A60 5.6W | E27 | phase-cut dim | clear

	CHF	CODE
2700K 480m	42,80	9003E138






DESIGN
AWARD
2023



Delta Selection
ADC Awards 2022

DOT

Wall surface



2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

⊕ IP20 L80|55K

	CHF	CODE
	213,90	330164W_
	213,90	330164M_
	213,90	330164Q_
	213,90	330164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	435 >90	5

3.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

⊕ IP20 L80|55K

	CHF	CODE
	296,70	330264W_
	296,70	330264M_
	296,70	330264Q_
	296,70	330264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x395 >90	3
3000K	2x425 >90	5


4.0

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

⊕ IP20 L80|55K

	CHF	CODE
	393,30	330464W_
	393,30	330464M_
	393,30	330464Q_
	393,30	330464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x400 >90	3
3000K	3x405 >90	5



back



PRIVATE RESIDENCE | UNIQUE RENOVATIONS BELGIUM




CREATE YOUR OWN TAPIS
weverducre.com/tapis-configurator



TAPIS

Wall surface



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

⊕ IP20 L80/50K

	CHF	CODE
	356,05	336174FJ_
	356,05	336174GW_
	356,05	336174ST_
	328,45	336174RA_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	480 >90	5

back



PRIVATE RESIDENCE | STUDIO 05 BELGIUM



EOAK FLOORS SHOWROOM | VIGONARCHITECTS HANOI | VIETNAM



CREATE YOUR OWN TAPIS
weverducre.com/tapis-configurator





DAS SEEHÄUSER | WOODSPACE MATTSEE | AUSTRIA



TAPIS

Wall surface

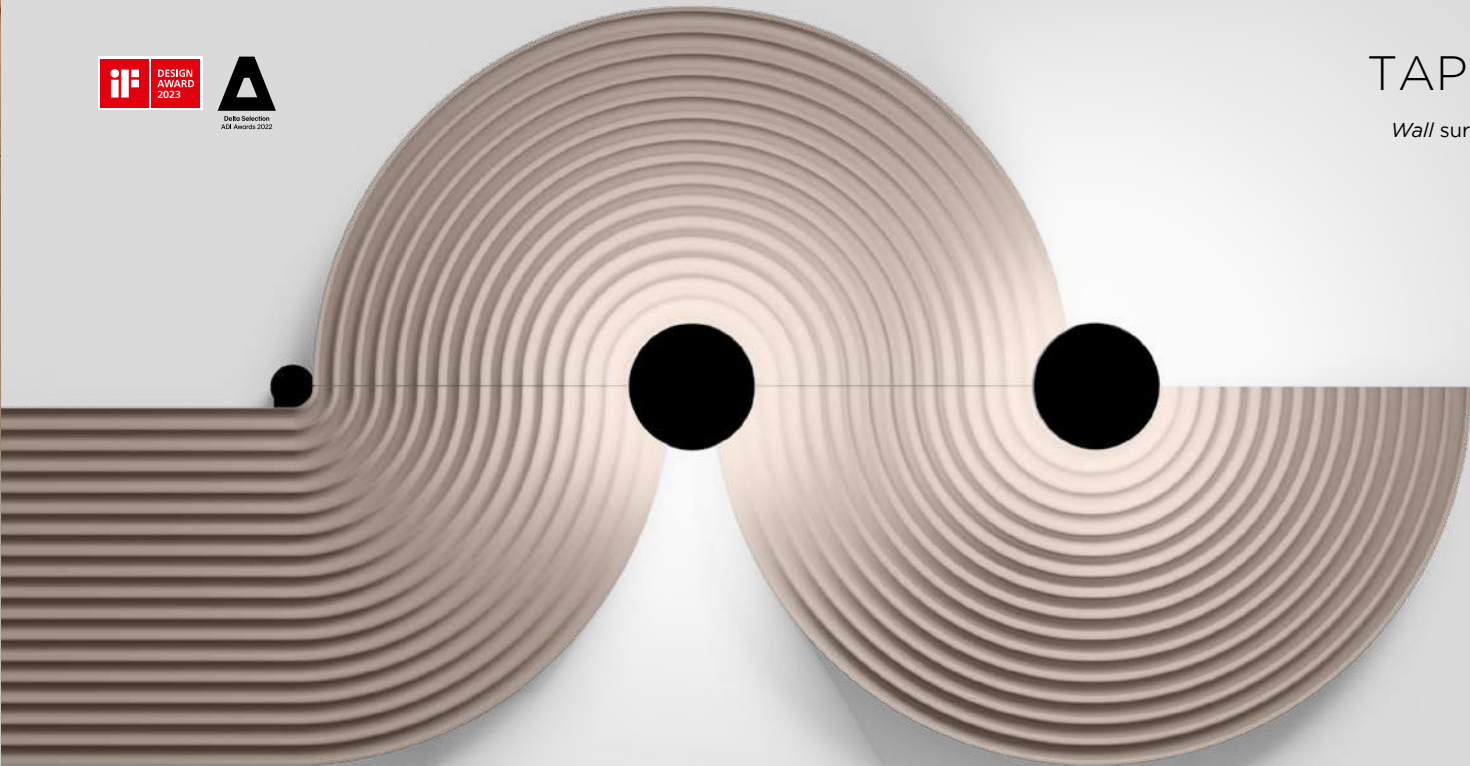


2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

⊕ IP20 L80/50K

	CHF	CODE
	367,10	336274FJ_
	367,10	336274GW_
	367,10	336274ST_
	349,15	336274RA_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	465 >90	3
3000K	500 >90	5




3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

⊕ IP20 L80/50K

	CHF	CODE
	382,30	336374FJ_
	382,30	336374GW_
	382,30	336374ST_
	360,20	336374RA_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	465 >90	3
3000K	500 >90	5




2.1

composite | aluminium

	CHF	CODE
	327,10	336200FJ0
	327,10	336200GW0
	327,10	336200ST0
	309,15	336200RA0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	465 >90	3
3000K	500 >90	5




3.1

composite | aluminium

	CHF	CODE
	342,25	336300FJ0
	342,25	336300GW0
	342,25	336300ST0
	320,20	336300RA0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	465 >90	3
3000K	500 >90	5




back



TAPIS SOFT

Wall surface




1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

⊕ IP20 L80I50K

	CHF	CODE
	549,25	336174WF_
	549,25	336174MF_
	549,25	336174LF_
	549,25	336174OF_
	549,25	336174IF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	410 >90	3
3000K	435 >90	5




2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

⊕ IP20 L80I50K

	CHF	CODE
	393,30	336274WF_
	393,30	336274MF_
	393,30	336274LF_
	393,30	336274OF_
	393,30	336274IF_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	440 >90	3
3000K	470 >90	5



2.1

aluminium | PET felt material
noise absorbing material

	CHF	CODE
	353,30	336200WF0
	353,30	336200MF0
	353,30	336200LF0
	353,30	336200OF0
	353,30	336200IF0

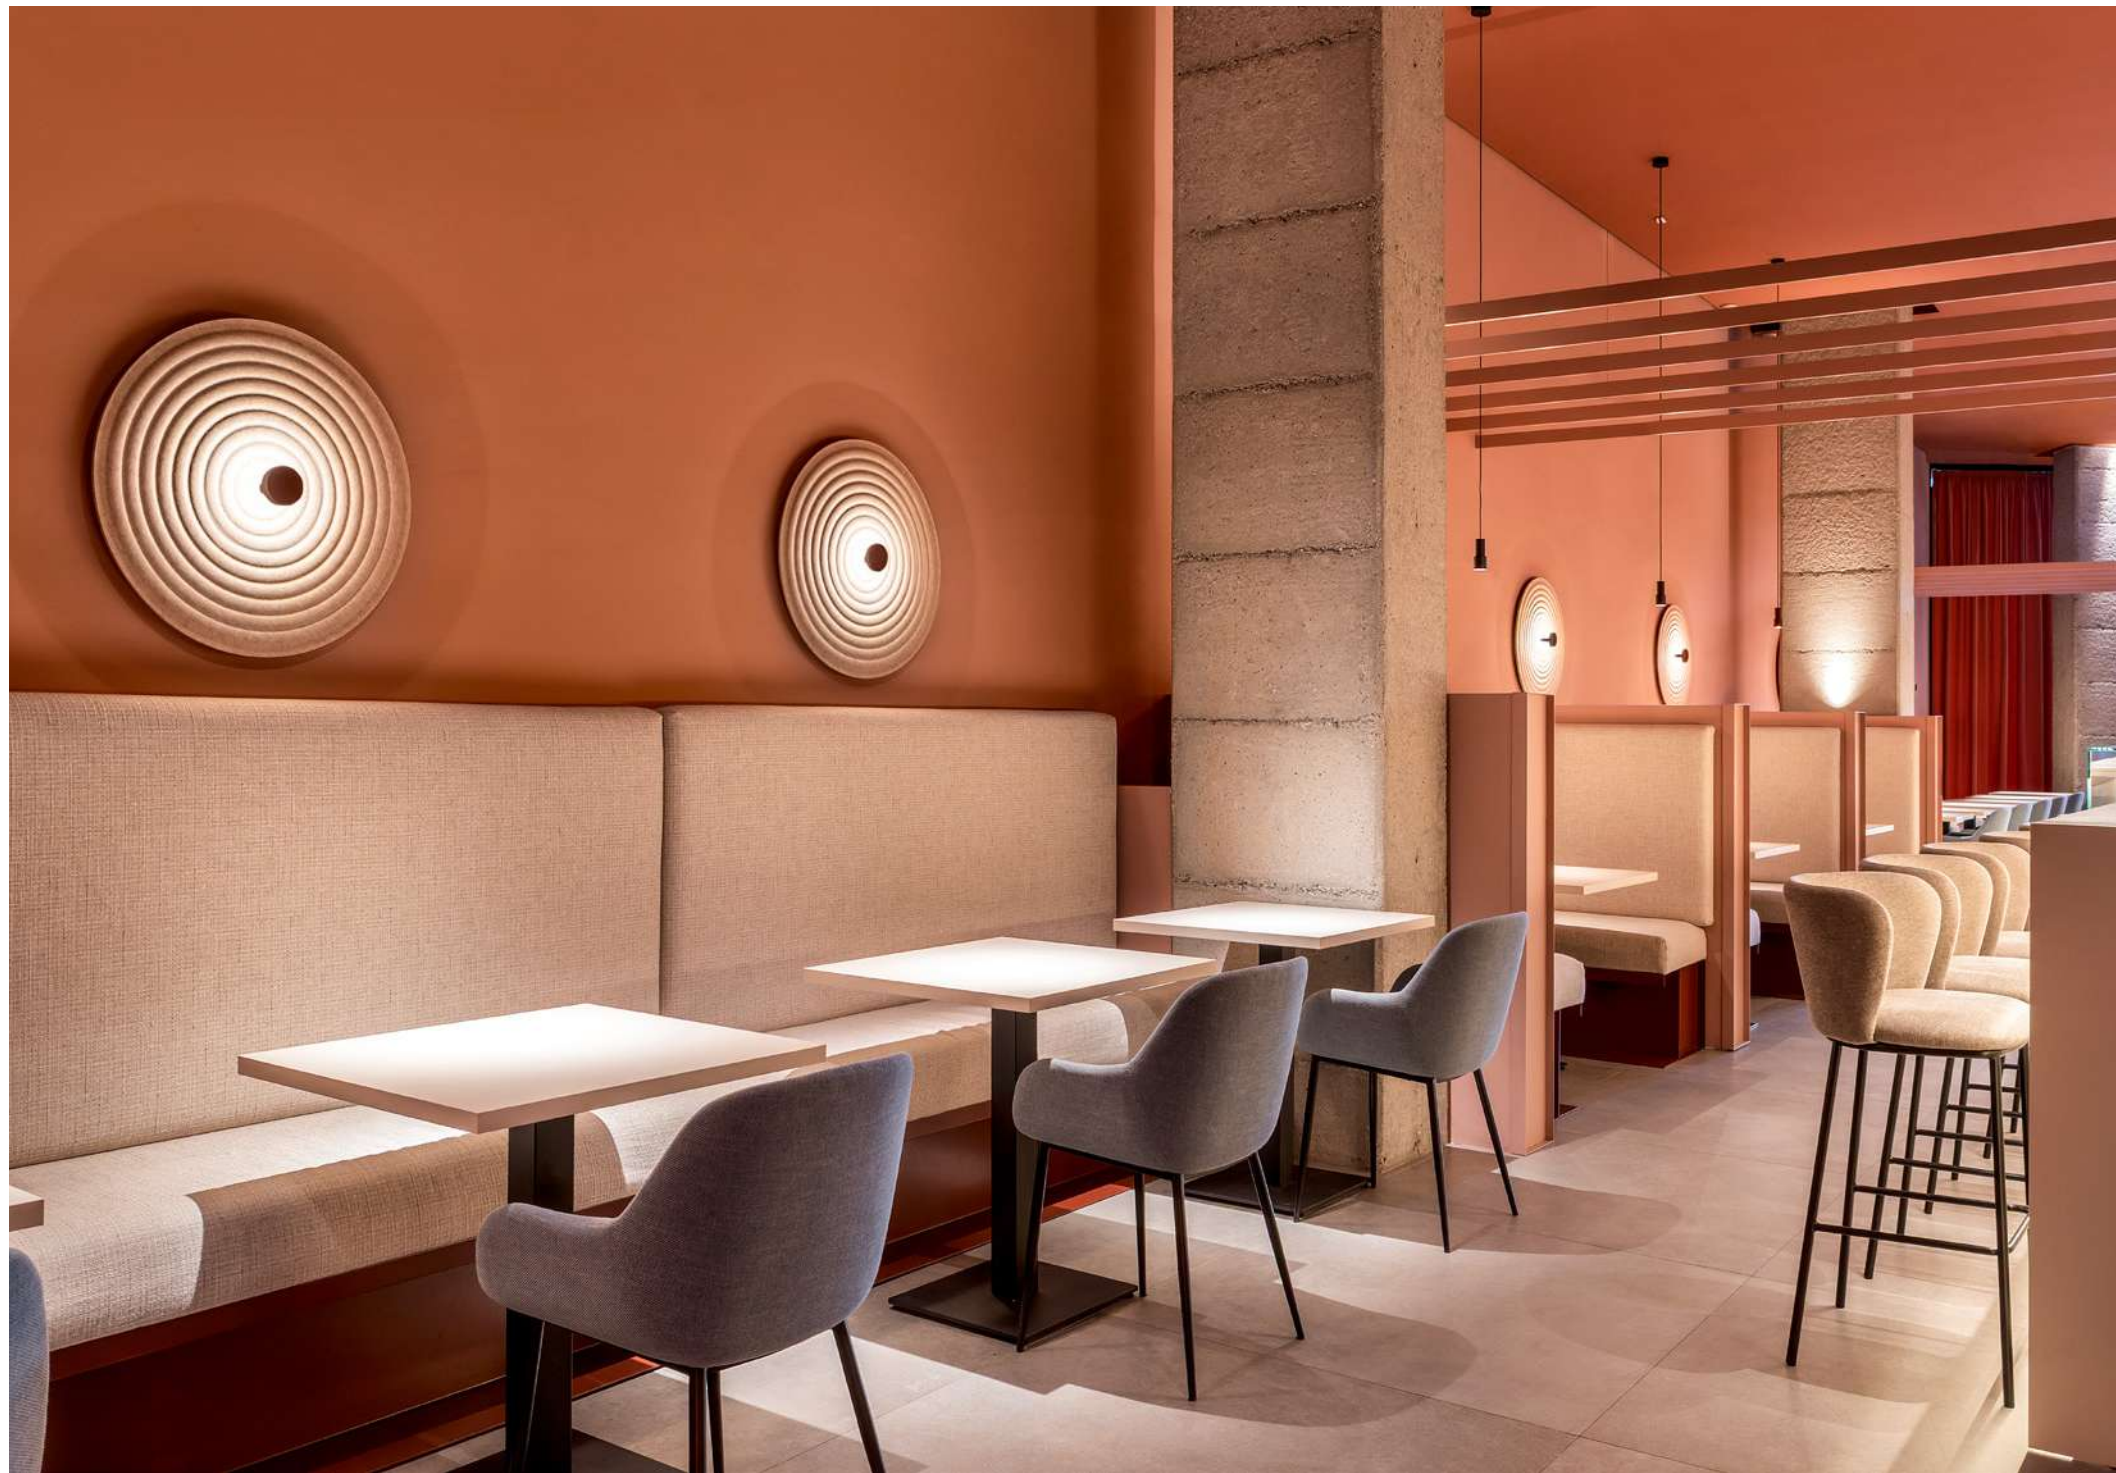




mixology
winner

TAPIS SOFT

Wall surface




3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

⊕ IP20 L80|50K

	CHF	CODE
	412,65	336374WF_
	412,65	336374MF_
	412,65	336374LF_
	412,65	336374OF_
	412,65	336374IF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	440 >90	3
3000K	470 >90	5



4.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

⊕ IP20 L80|50K

	CHF	CODE
	412,65	336474WF_
	412,65	336474MF_
	412,65	336474LF_
	412,65	336474OF_
	412,65	336474IF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	440 >90	3
3000K	470 >90	5



3.1

aluminium | PET felt material
noise absorbing material

	CHF	CODE
	372,60	336300WF0
	372,60	336300MF0
	372,60	336300LF0
	372,60	336300OF0
	372,60	336300IF0



4.1

aluminium | PET felt material
noise absorbing material

	CHF	CODE
	372,60	336400WF0
	372,60	336400MF0
	372,60	336400LF0
	372,60	336400OF0
	372,60	336400IF0

back



Wall surface



Ø260 / 38-43


3.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

	CHF	CODE
	404.35	317778W
	409.90	317778G
	409.90	317778M
	409.90	317778Q
	409.90	317778P
	419.55	317778SG
	419.55	317778CC
	419.55	317778ME
	404.35	317778B
marble	478.90	317778MW
marble	478.90	317778MB

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5







ARGANA RESTAURANT | JOSE LARA INTERIORISMO MADRID | SPAIN





PRIVATE RESIDENCE | UP FOR GRABS INTERIORS UNITED KINGDOM





2.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium



	CHF	CODE
	369,85	317478W_
	372,60	317478G_
	372,60	317478M_
	372,60	317478Q_
	372,60	317478P_
	369,85	317478B_
 marble	460,95	317478MW_
 marble	460,95	317478MB_




3.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium




	CHF	CODE
	419.55	317678W_
	425.05	317678G_
	425.05	317678M_
	425.05	317678Q_
	425.05	317678P_
	419.55	317678B_
 marble	495.45	317678MW_
 marble	495.45	317678MB_





MILES

Wall surface




9.0

LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP20 L80|60K

	CHF	CODE
	494,05	317878W_
	500,95	317878G_
	494,05	317878B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1540 >90	3
3000K	1560 >90	5



12.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP20 L80|60K

	CHF	CODE
	590,65	317978W_
	601,70	317978G_
	590,65	317978B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2110 >90	3
3000K	2130 >90	5





LARRA

Wall surface



1.0

LED TUBE 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

□ IP20 L70|15K

	CHF	CODE
	162,85	1966T8W_
	162,85	1966T8L_
	162,85	1966T8M_
	162,85	1966T8P_
	162,85	1966T8Q_
	162,85	1966T8GM_
	162,85	1966T8B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	700 >90	3
3000K	720 >90	5

2.0

LED TUBE 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

□ IP20 L70|15K

	CHF	CODE
	191,85	1967T8W_
	191,85	1967T8L_
	191,85	1967T8M_
	191,85	1967T8P_
	191,85	1967T8Q_
	191,85	1967T8GM_
	191,85	1967T8B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	800 >90	3
3000K	820 >90	5



back




OFFICE COPTHALL BRIDGE HOUSE | EKHO STUDIO HARROGATE | UNITED KINGDOM

 **DESIGN AWARD 2024**  **winner 2023**

FINLIN

Wall surface

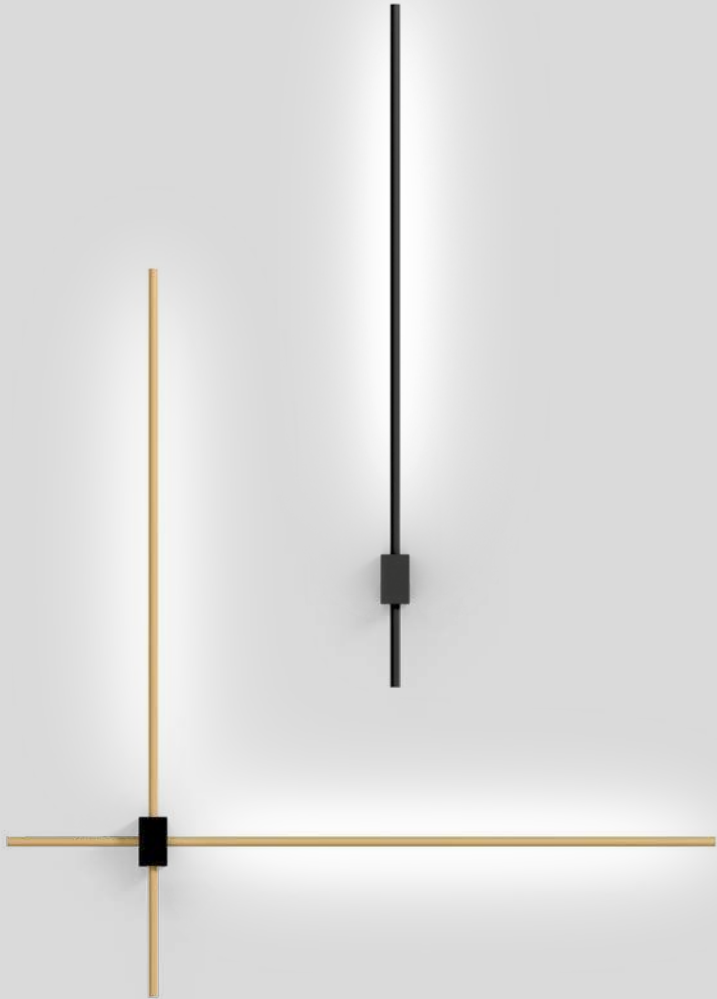


OPTIONAL

spacer 10mm for overlapping

	CHF	CODE
	42,80	900195B0

specs on page 911




1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CHF	CODE
	324,30	370584CH_
	324,30	370584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	485 >90	5



4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

	CHF	CODE
	448,50	370884CH_
	448,50	370884B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	895 >90	3
3000K	965 >90	5





PASTRY SHOP DONATIEN MAÎTRE ECLAIR | STUDIO CARRÉ - PAUL LEVAILLANT PARIS | FRANCE

DESIGN
AWARD
2024

reddot winner 2023

FINLIN

Wall surface



263




433



727



1239



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K

3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K



OPTIONAL

spacer 10mm for overlapping

	CHF	CODE
	42,80	900195B0

specs on page 911

	CHF	CODE
	407,10	370684CH
	407,10	370684B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	895 >90	3
3000K	965 >90	5


	CHF	CODE
	462,30	370784CH
	462,30	370784B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	895 >90	3
3000K	965 >90	5



FINLIN


Wall surface



1.0 ROUND

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

⊕ IP20 L80|50K



OPTIONAL

spacer 10mm for overlapping

	CHF	CODE
	42,80	900196B0

specs on page 911

	CHF	CODE
	462,30	371184CH
	462,30	371184B



LIGHT COLOUR	LUMEN CRI	CODE
2700K	1180 >90	3
3000K	1280 >90	5

 back



FIL SPIN

Wall surface

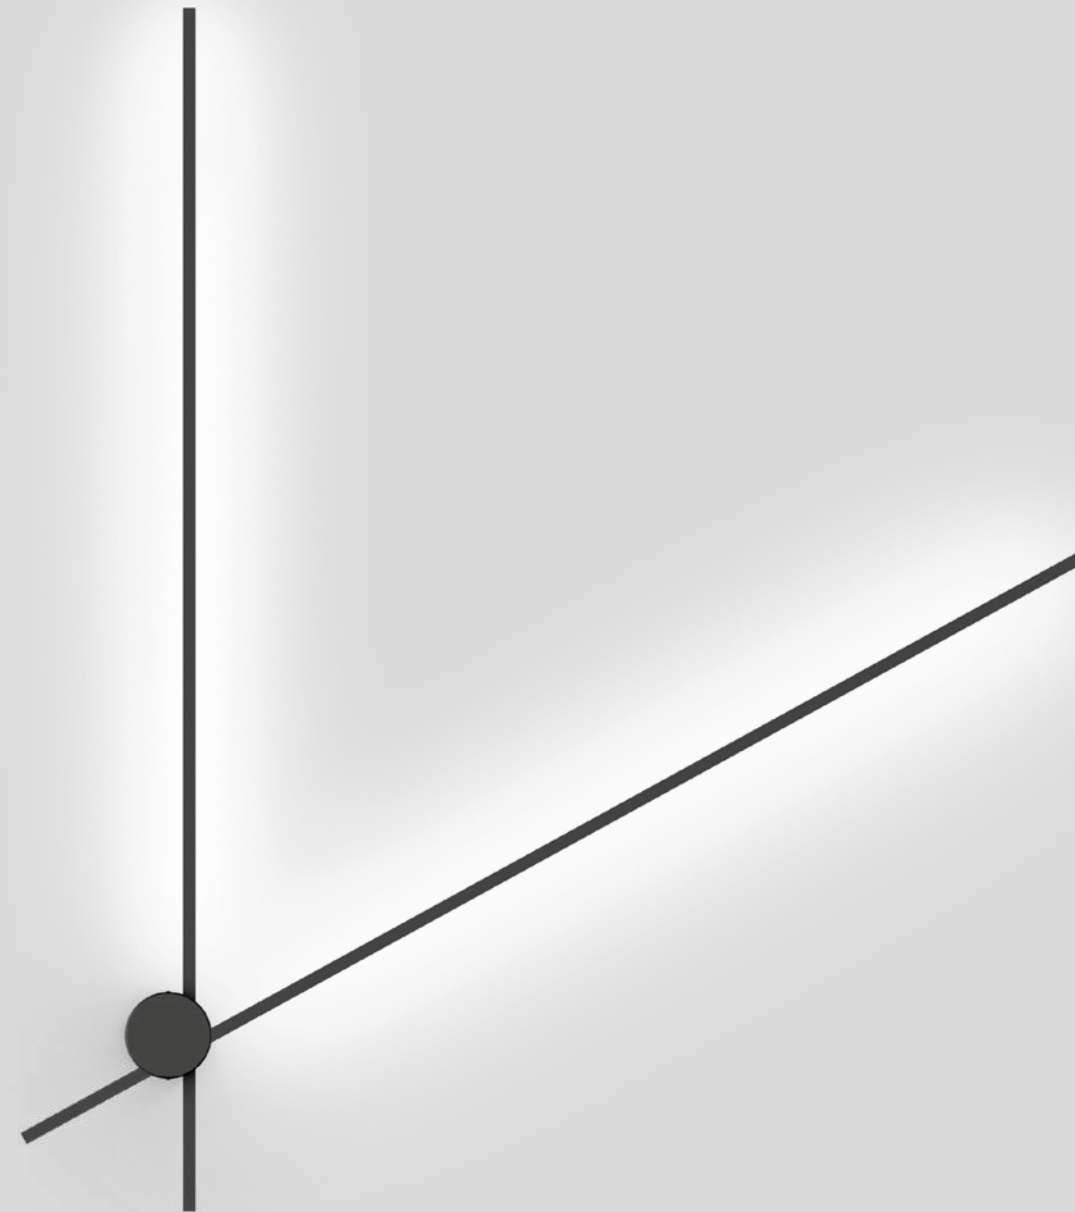

1.0


LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

⊕ IP20 180° L80/100K

2700K | CRI >90 | 2x905lm

CHF	CODE
586,50	254584B3

WEVER & DUCRÉ 680 — 681



back



PRIVATE RESIDENCE | STUDIO PALINPERÄ OY FINLAND



CREATE YOUR OWN VENN
weverducre.com/venn-configurator



S&R CORNELISSEN

VENN

Wall surface



277

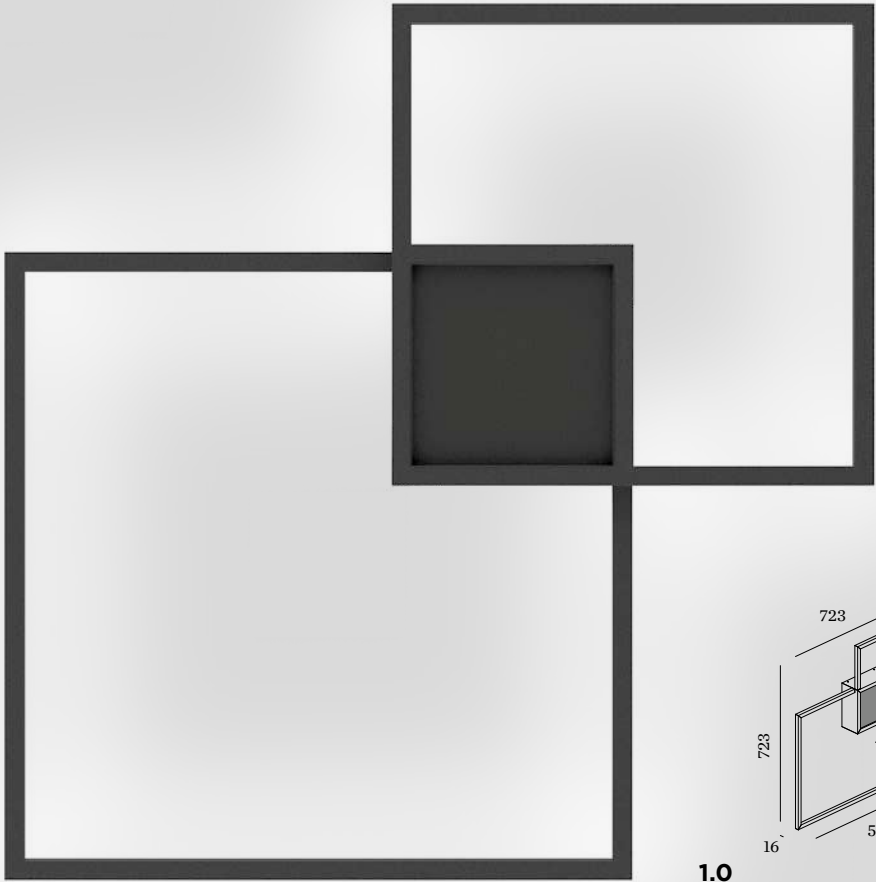


1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover
indirect light

⊕ IP20 L70|55K

	CHF	CODE
	938,40	149184W_
	938,40	149184Q_
	938,40	149184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3410 >90	3
3000K	3510 >90	5




2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover dir./
indirect light

⊕ IP20 L70|55K

	CHF	CODE
	1062,60	149284W_
	1062,60	149284Q_
	1062,60	149284B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	480/3920 >90	3
3000K	495/4035 >90	5



back





PRIVATE RESIDENCE AUSTRIA



MATCH snooze

Wall surface 61 | 137 | 153



1.0

LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off


⊕ IP20 0°-90°|350° ∠ M-30° L80|50K

	CHF	CODE
	273,25	177353W_
	273,25	177353Q_
	273,25	177353B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	330 >90	3
3000K	345 >90	5



PRIVATE RESIDENCE | NORDIC STANDARD SPAIN



MICK snooze


Wall surface



199



333



1.0

LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

⊕ IP20 0°-90°|350° ⚡ M-23° L80|50K

	CHF	CODE
	407,10	159643J_
	407,10	159643K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	185 >90	3
3000K	200 >90	5




SARA snooze


Wall surface



203



365



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. switch on/off

IP20 0°-90°/330°

	CHF	CODE
	213,90	157320W0
	219,45	157320G0
	219,45	157320K0
	213,90	157320B0

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim





	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905



MICK

Wall surface

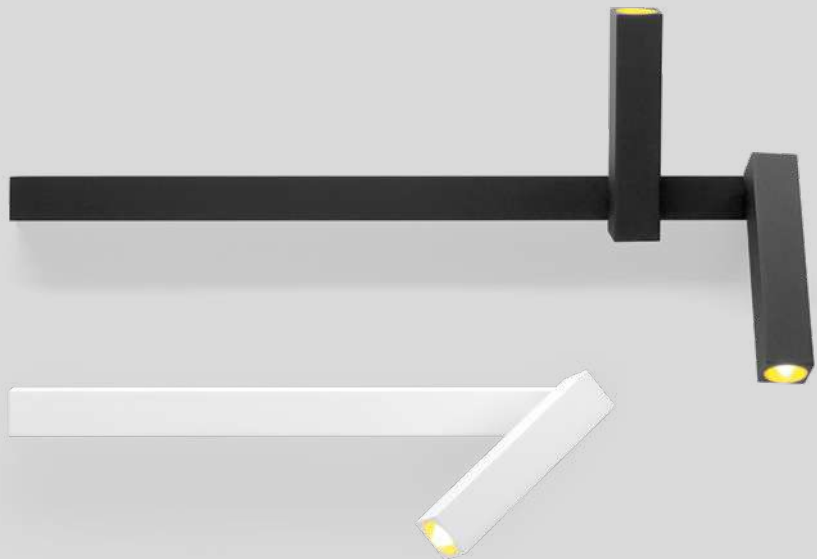

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-Z3° L80|50K

	CHF	CODE
	369,85	159344J_
	369,85	159344K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	235 >90	3
3000K	245 >90	5


2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ⚡ M-Z3° L80|50K

	CHF	CODE
	476,10	159244J_
	476,10	159244K_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x215 >90	3
3000K	2x225 >90	5





DOMINO

Wall surface



1.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

Ⓢ IP20 L80|60K



	CHF	CODE
	371,25	3371A4W_
	371,25	3371A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1180 >80	2
3000K	1190 >80	4



SCAVA

Wall surface

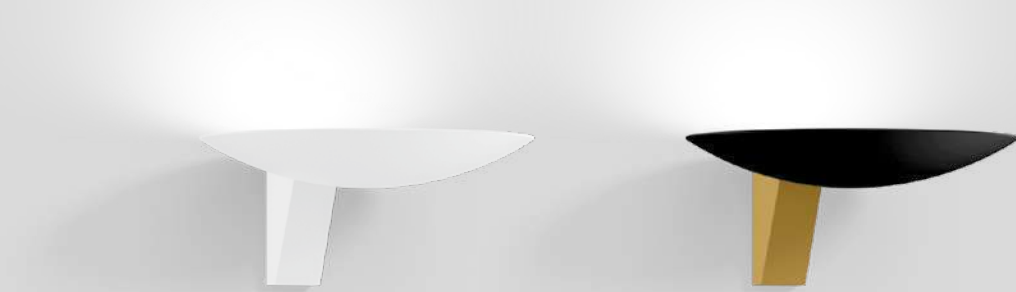

1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PC cover

⊕ IP20 L80|50K

	CHF	CODE
	311,90	350188W_
	316,05	350188GB_
	311,90	350188B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1830 >90	3
3000K	1910 >90	5

back



PRIVATE RESIDENCE BELGIUM



1.0
LED COB 9W | dimmable
220-240VAC | 50-60Hz | incl. driver
glass | aluminium

⊕ IP20 L80/50K

phase-cut dim		CHF	CODE
		369,85	346184WC_
		369,85	346184WW_
		369,85	346184WA_
		369,85	346184WB_
		369,85	346184BC_
		369,85	346184BW_
		369,85	346184BA_
		369,85	346184BB_

DALI-2		CHF	CODE
		411,25	346185WC_
		411,25	346185WW_
		411,25	346185WA_
		411,25	346185WB_
		411,25	346185BC_
		411,25	346185BW_
		411,25	346185BA_
		411,25	346185BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5





PERLEZ IP44


Wall surface



169



271 | 275 | 295



1.0


LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

⊕ IP44 L80/50K

⌚ 50-52

	CHF	CODE
	259,45	192484W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	520 >95	3
3000K	550 >95	5
4000K	580 >95	7



2.0


LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

⊕ IP44 L80/50K

⌚ 50-52

	CHF	CODE
	273,25	192584W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >95	3
3000K	630 >95	5
4000K	665 >95	7



3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

⊕ IP44 L80/50K

⌚ 50-52

	CHF	CODE
	300,85	192684W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	645 >95	3
3000K	665 >95	5
4000K	705 >95	7





PERLEZ CLIP IP44



Wall surface



169



271 | 275 | 295




1.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

⊕ IP44 L80|50K

	CHF	CODE
	269,10	392484W_
LIGHT COLOUR	LUMEN CRI	CODE
3000K	550 >95	5
4000K	580 >95	7




2.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

⊕ IP44 L80|50K

	CHF	CODE
	282,90	392584W_
LIGHT COLOUR	LUMEN CRI	CODE
3000K	630 >95	5
4000K	665 >95	7




3.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

⊕ IP44 L80|50K


	CHF	CODE
	296,70	392684W_
LIGHT COLOUR	LUMEN CRI	CODE
3000K	665 >95	5
4000K	705 >95	7





MIRBA IP44

Wall surface




1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 L80I50K

	CHF	CODE
	273,25	328188W_
	273,25	328188BW_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 375/H 645 >90	3
3000K	L 395/H 670 >90	5




2.0

LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 L80I50K

	CHF	CODE
	328,45	328288W_
	328,45	328288BW_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 535/H 920 >90	3
3000K	L 575/H 960 >90	5



3.0

LED PCB 8/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 L80I50K

	CHF	CODE
	379,50	328388W_
	379,50	328388BW_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	L 730/H 1290 >90	3
3000K	L 770/H 1350 >90	5





MIRBI long IP44


Wall surface



171




297



1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector


⊕ IP44 L80|60K



2.0

LED PCB 8/13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 L80|60K



3.0

LED PCB 13/19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 L80|60K



	CHF	CODE
	338,10	329188W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	255/420 >90	3
3000K	265/435 >90	5

	CHF	CODE
	503,70	329288W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	445/815 >90	3
3000K	460/840 >90	5

	CHF	CODE
	931,50	329388W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	735/1220 >90	3
3000K	755/1250 >90	5




back



RIBELLE IP65

Wall surface



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP65 L80|100K

3000K | CRI >90 | 425lm

	CHF	CODE
	448,50	772184W5
	448,50	772184M5
	448,50	772184B5



825



867



PAVIO IP65

Wall surface

58
Ø150

1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80/100K

3000K | CRI >90 | 525lm

	CHF	CODE
	255,30	351184W5
	255,30	351184Q5
	255,30	351184B5

831

back

WEVER & DUCRÉ 710 – 711

TABLE



DRO
715



DRO
717



CG01
719



MIRRO
721



MATCH
723



ROOMOR
725

FLOOR



DRO
715



FINLIN
727



MATCH
729



DRO
731



MIRRO
733



ROOMOR
735



DRO

Table / Floor



279




373



465



623



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with switch




	CHF	CODE
	255,30	6421G0WB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	CHF	CODE
2700K 340lm	24,85	9010G803
3000K 350lm	24,85	9010G805



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch




	CHF	CODE
	365,70	6422C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

	CHF	CODE
2700K 450lm	14,50	9003C103



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch



	CHF	CODE
	476,10	6423E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim
opal

	CHF	CODE
2700K 800lm	20,05	9003E152



DRO

Table



279



373




465



623



623



2.0


C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch



	CHF	CODE
	489,90	6432COWB0

OPTIONAL

C35 5.5W E14 phase-cut dim opal		
	CHF	CODE
2700K 450lm	14,50	9003C103



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch




	CHF	CODE
	627,90	6433E0WB0

OPTIONAL

A60 9W E27 phase-cut dim opal		
	CHF	CODE
2700K 800lm	20,05	9003E152



PRIVATE RESIDENCE BELGIUM

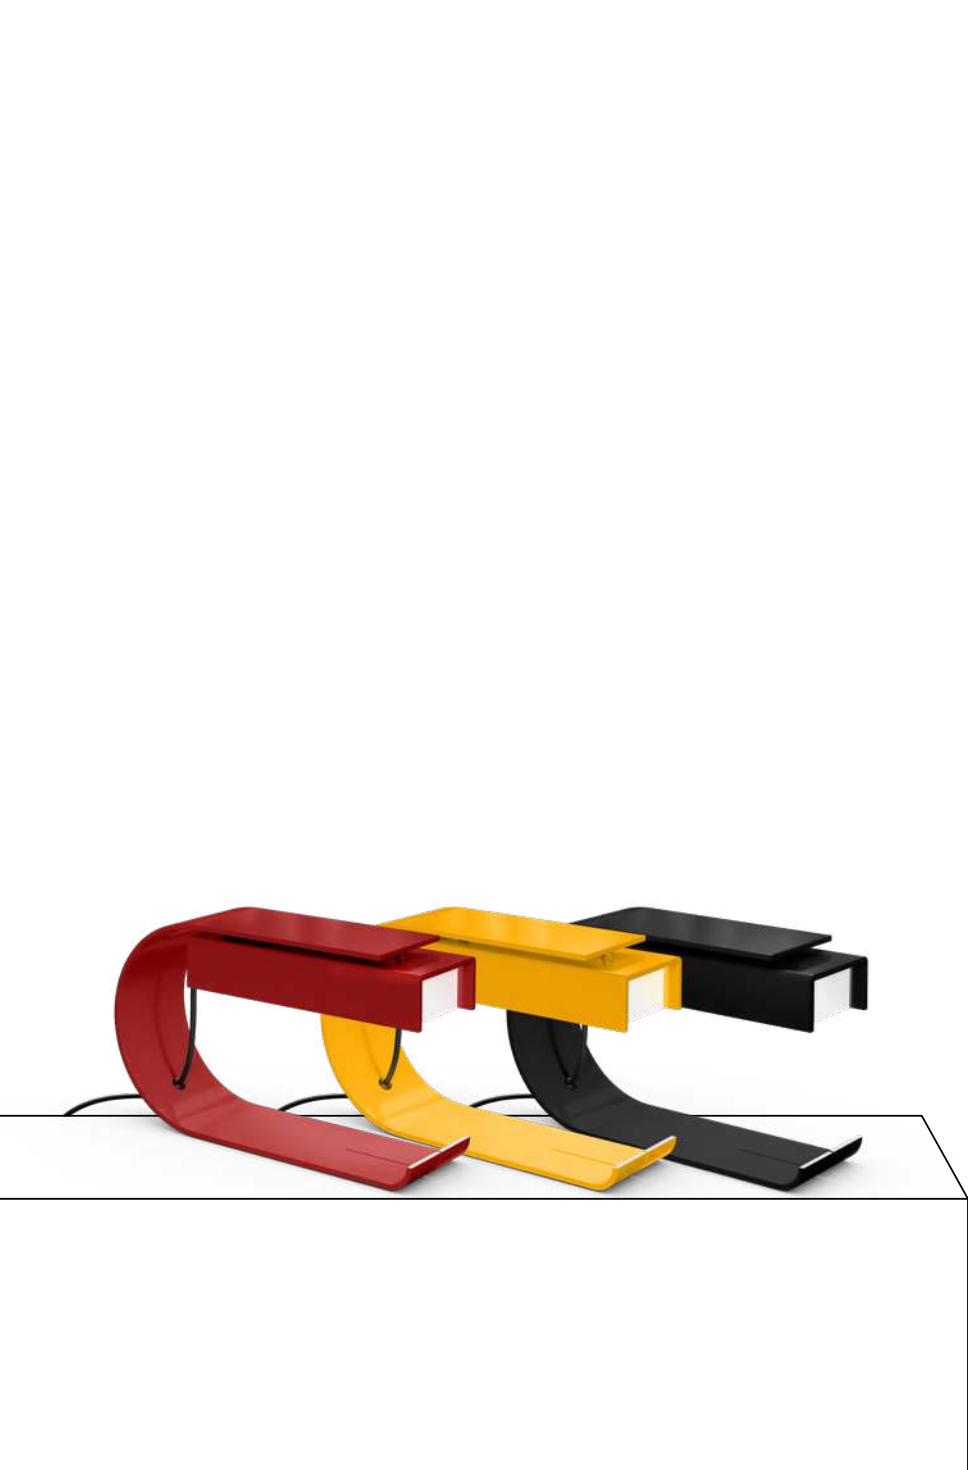


CHRISTOPHE GEVERS



CG01

Table



CG01

T25 max. 6W | E14
220-240VAC | 50-60Hz
steel
cable plug with dimmer switch



	CHF	CODE
	1352,40	4011C0YE0
	1352,40	4011C0RE0
	1352,40	4011C0AU0
	1352,40	4011C0BE0
	1352,40	4011C0B0

OPTIONAL

T25-85 5W | E14 | phase-cut dim
gold tinted

	CHF	CODE
2200K 460lm	40,05	9003C108
2500K 480lm	40,05	9003C107
2700K 500lm	40,05	9003C106



MIRRO


Table



283



467



625



1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective
composite panel
cable plug with dimmer switch



	CHF	CODE
	407,10	6301EOGB0
	407,10	6301EONB0
	407,10	6301EOLB0
	407,10	6301EOBL0


OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2700K 405lm	44,20	9003E139




A60 5.5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 405lm	44,20	9003E140

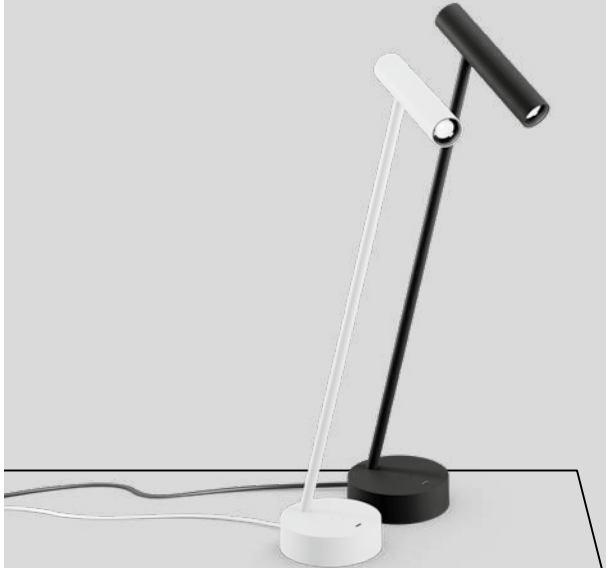

MATCH

Table 61 | 137 | 153



1.0

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
incl. USB-C port

IP20 45°|0°-145° M-30° L80|50K

	CHF	CODE
2700K CRI >90 505lm		
	379,50	477254W3
	379,50	477254B3



HOTEL LOPESAN | EMILIO PELLEJERO FARO | SPAIN


reddot award 2019
winner lighting design



back

ROOMOR

Table



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch
CH and UK variants online

IP20 0°-45°|0°-30°

	CHF	CODE
	361,60	637120GG1
	361,60	637120RR1
	361,60	637120BK1
	354,70	637120BB1

OPTIONAL

	CHF	CODE
2700K 445lm	22,80	901228W3
2700K 440lm	22,80	901228B3
3000K 465lm	22,80	901228W5
3000K 460lm	22,80	901228B5

more lamps and info on page 905




FINLIN

Floor



263



433



673 | 679




1.0

LED PCB 16W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser
cable plug with dimmer switch





IP20 0°-10°/360° L80/50K

2700K | CRI >90 | 1360lm

	CHF	CODE
	545,10	470184W3
	545,10	470184B3




back

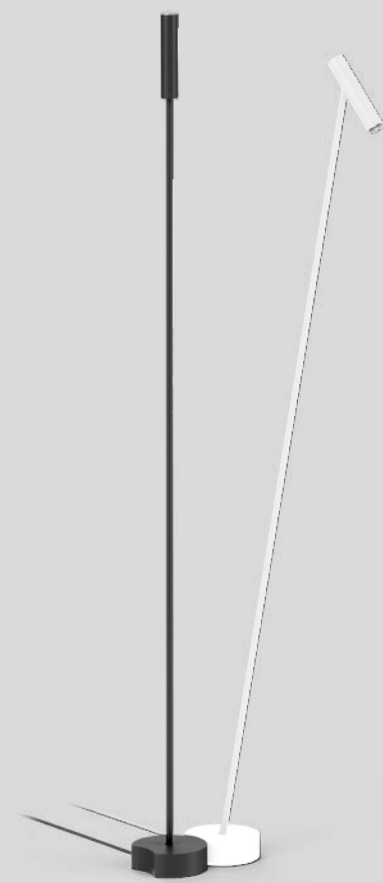


MATCH


Floor 61 | 137 | 153




193




329 | 347




415 | 509



571



589 | 685



1.0

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
integrated dimmer button

IP20 0°-10°|360°|0°-145° M-30° L80|50K

2700K | CRI >90 | 505lm

	CHF	CODE
	448,50	477354W3
	448,50	477354B3



PRIVATE RESIDENCE | ERIBO STIJLBOUWERS BELGIUM

DRO

Floor

279

373

465

623

2500

1650

ø300

ø454

3.0

A60 max. 12W | E27 | dimmable

220-240VAC | 50-60Hz

aluminium | steel

artisanal Italian hand blown glass

cable plug with dimmer switch

IP20

CHF

CODE

821,10

6442E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

CHF

CODE

2700K | 800lm

20,05

9003E152

13&9 DESIGN

back



WEVER & DUCRÉ

730 — 731



MIRRO

Floor



2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective
composite panel
cable plug with dimmer switch



	CHF	CODE
	589,30	6311E0GB0
	589,30	6311E0NB0
	589,30	6311E0LB0
	589,30	6311E0BLO

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 955lm	48,30	9003E157

3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective
composite panel
cable plug with dimmer switch



	CHF	CODE
	810,10	6312E0GB0
	810,10	6312E0NB0
	810,10	6312E0LB0
	810,10	6312E0BLO

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror


	CHF	CODE
2200K 370lm	48,30	9003E156
2700K 410lm	48,30	9003E142

G95 5W | E27 | phase-cut dim
silver mirror

	CHF	CODE
2700K 955lm	48,30	9003E157




reddot award 2019
winner lighting design

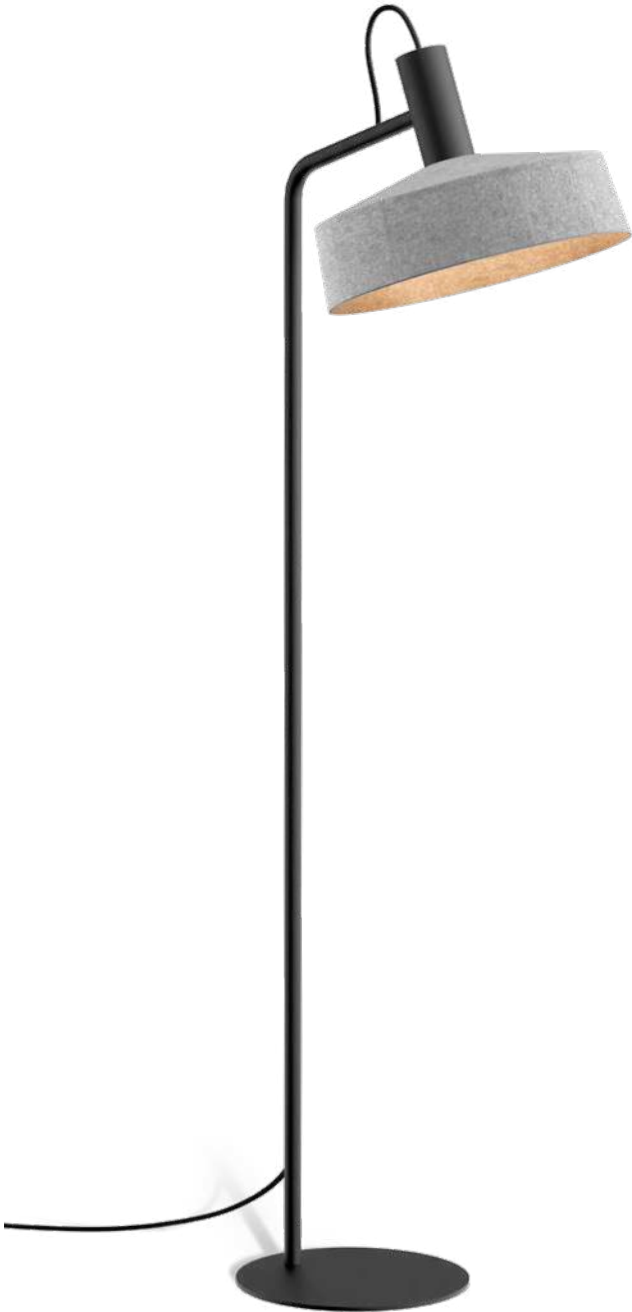

ROOMOR

Floor



1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online


IP20 0°-45°|0°-30°

	CHF	CODE
	692,80	638120BF2
	666,55	638120BK2
	655,50	638120BB2

OPTIONAL

	CHF	CODE
2700K 440lm	22,80	901228B3
3000K 460lm	22,80	901228B5

more lamps and info on page 905



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online

IP20 0°-45°|0°-30°

	CHF	CODE
	799,05	638120BF3
	783,85	638120BK3
	765,90	638120BB3

OPTIONAL

	CHF	CODE
2700K 440lm	22,80	901228B3
3000K 460lm	22,80	901228B5

more lamps and info on page 905

outdoor

Ceiling recessed

738 – 749



RECESSED



DEEP BIJOU
741



DEEP PETIT
743



DEEP
745



TAIO
747



INTRA
749






PRIVATE RESIDENCE | MINDAUGAS LELIŪGA LITHUANIA

DEEP bijou

Outdoor
Ceiling recessed



99 | 157



1.0


LED COB 4W | 500mA | 8V
aluminium

IP65 A-M-30° L80|55K

wire springs 50-52 1.85 4-25

	CHF	CODE
	95,95	165361W_
	95,95	165361Q_
	95,95	165361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	495 >90	5



IC rated



MORE VERSIONS ONLINE
weverducre.com/more-deep-bijou-ip65

ALWAYS USE

driver | IP67

	CHF	CODE
7W 500mA	64,20	90214301


more options and specs on page 899



back




PRIVATE RESIDENCE GREECE



DEEP petit

Outdoor
Ceiling recessed



101 | 159



1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80/50K

wire springs 68-70 1.85 4-25

	CHF	CODE
	132,50	153761W_
	132,50	153761Q_
	132,50	153761B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	590 >90	3
3000K	610 >90	5

ALWAYS USE

driver | 350mA | IP68


	CHF	CODE
17W	95,25	90213602

more options and specs on page 897





MORE VERSIONS ONLINE
weverducre.com/more-deep-ip65



DEEP

Outdoor
Ceiling recessed



105 | 161



73

ø95

1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80I55K

wire springs 86-89 85 4-27

	CHF	CODE
	150,45	184161W_
	150,45	184161Q_
	150,45	184161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485/640 >90	3
3000K	510/690 >90	5

ALWAYS USE

driver | IP68

	CHF	CODE
17W 350mA	95,25	90213602
24W 500mA	102,15	90214702

more options and specs on page 897



TAIO

Outdoor
Ceiling recessed



55

ø77

1.0

LED COB 6/9W | 350/500mA | 18V
aluminium
opal glass convex lens

IP65 W-105° L80/55K g

wire springs 68-73 1.80 4-27

	CHF	CODE
	131,10	180781W
	131,10	180781G
	131,10	180781Q
	131,10	180781B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	340/455 >90	3
3000K	370/495 >90	5

ALWAYS USE


driver | IP68

	CHF	CODE
17W 350mA	95,25	90213602
24W 500mA	102,15	90214702

more options and specs on page 897



IC rated




back



PRIVATE RESIDENCE | KILLIAN GARTNER AUSTRIA

INTRA

Outdoor
Ceiling recessed



1.0 OPAL


LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 L70|60K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 410lm

	CHF	CODE
	186,30	733188W5
	186,30	733188A5
	186,30	733188B5



2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 W-45° L70|50K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 560lm

	CHF	CODE
	186,30	733268W5
	186,30	733268A5
	186,30	733268B5

Ceiling surface / suspended

750 – 777

SURFACE



TRAM
753



TUBE
755



TAIO
757



RAY
759



TRAIN
761



TUBE CARRÉ
763



BOX
765



BLAS 1.0
767



BLAS 2.0
767



ROB
769



ROSS
771



TRADORA
775

SUSPENDED



TRADORA
777





PRIVATE RESIDENCE | ATELIER B AUSTRIA



TRAM

Outdoor
Ceiling surface




1.0
LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65  M-36° L70|55K

	CHF	CODE
	196,00	747768W5
	196,00	747768A5
	196,00	747768Q5
	196,00	747768B5



797

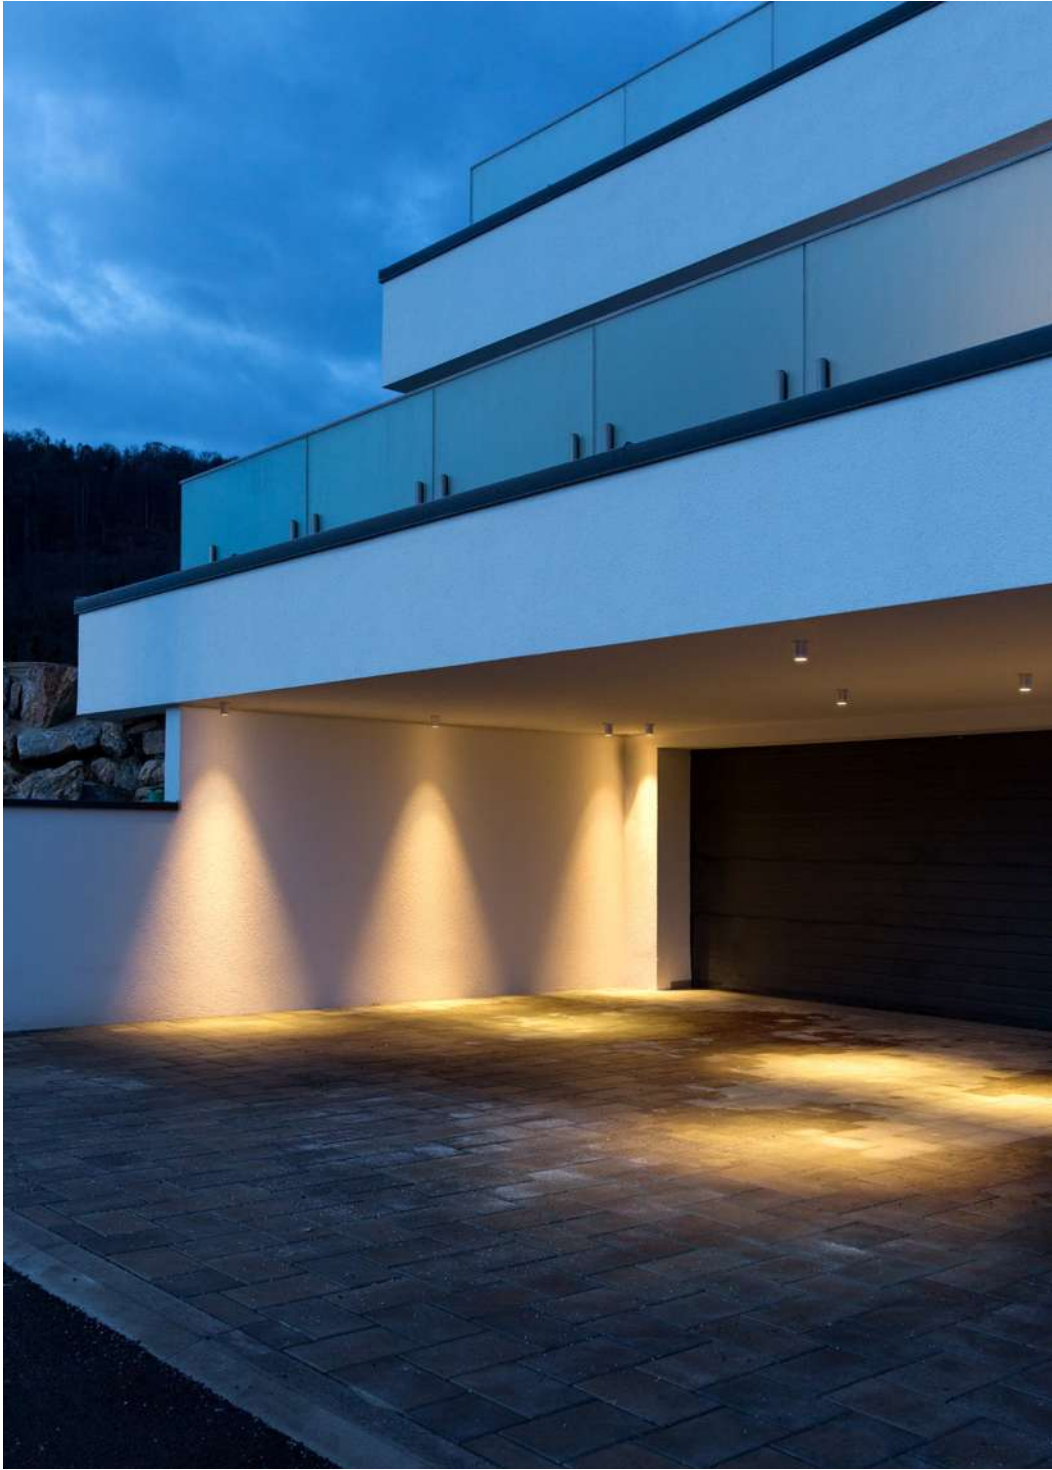

PRIVATE RESIDENCE AUSTRIA



TUBE
Outdoor
Ceiling surface



1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⚡ M-36° L80|60K

3000K | CRI >90 | 620lm

	CHF	CODE
	287,05	734364W5
	287,05	734364D5
	287,05	734364A5
	287,05	734364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

🔊 ⊕ IP65

	CHF	CODE
	162,85	734120W0
	162,85	734120D0
	162,85	734120A0
	162,85	734120Q0
	162,85	734120B0

OPTIONAL

PAR16 3.7W | GU10

	CHF	CODE
 2700K 350lm	17,95	905227S2
 3000K 350lm	17,95	905227S4






PRIVATE RESIDENCE BELGIUM



TAIO

Outdoor
Ceiling surface



1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

⊕ IP65 ⚡ W-105° L80/55K

	CHF	CODE
	273,25	180884W
	273,25	180884A
	273,25	180884Q
	273,25	180884B



LIGHT COLOUR	LUMEN CRI	CODE
2700K	455 >90	3
3000K	510 >90	5



SHOP PHILMODE | ERIC FRANSSENS BEAUFAYS | BELGIUM



RAY
Outdoor
Ceiling surface

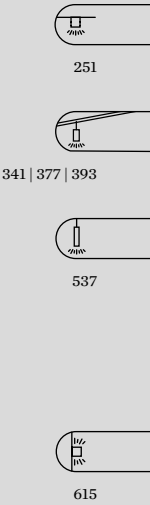

OPTIONAL

inner cover

	CHF	CODE
	31,75	911041W1
	31,75	911041D1
	31,75	911041A1
	31,75	911041B1

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⚡ M-21° L70|50K


	CHF	CODE
	241,50	735458W_
	241,50	735458D_
	241,50	735458A_
	241,50	735458B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	670 >90	3
3000K	700 >90	5
2000-3000K	470 >90	9



TRAIN

Outdoor
Ceiling surface



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⚡ M-36° L70 | 55K


	CHF	CODE
	196,00	718668W5
	196,00	718668A5
	196,00	718668Q5
	196,00	718668B5





807



back

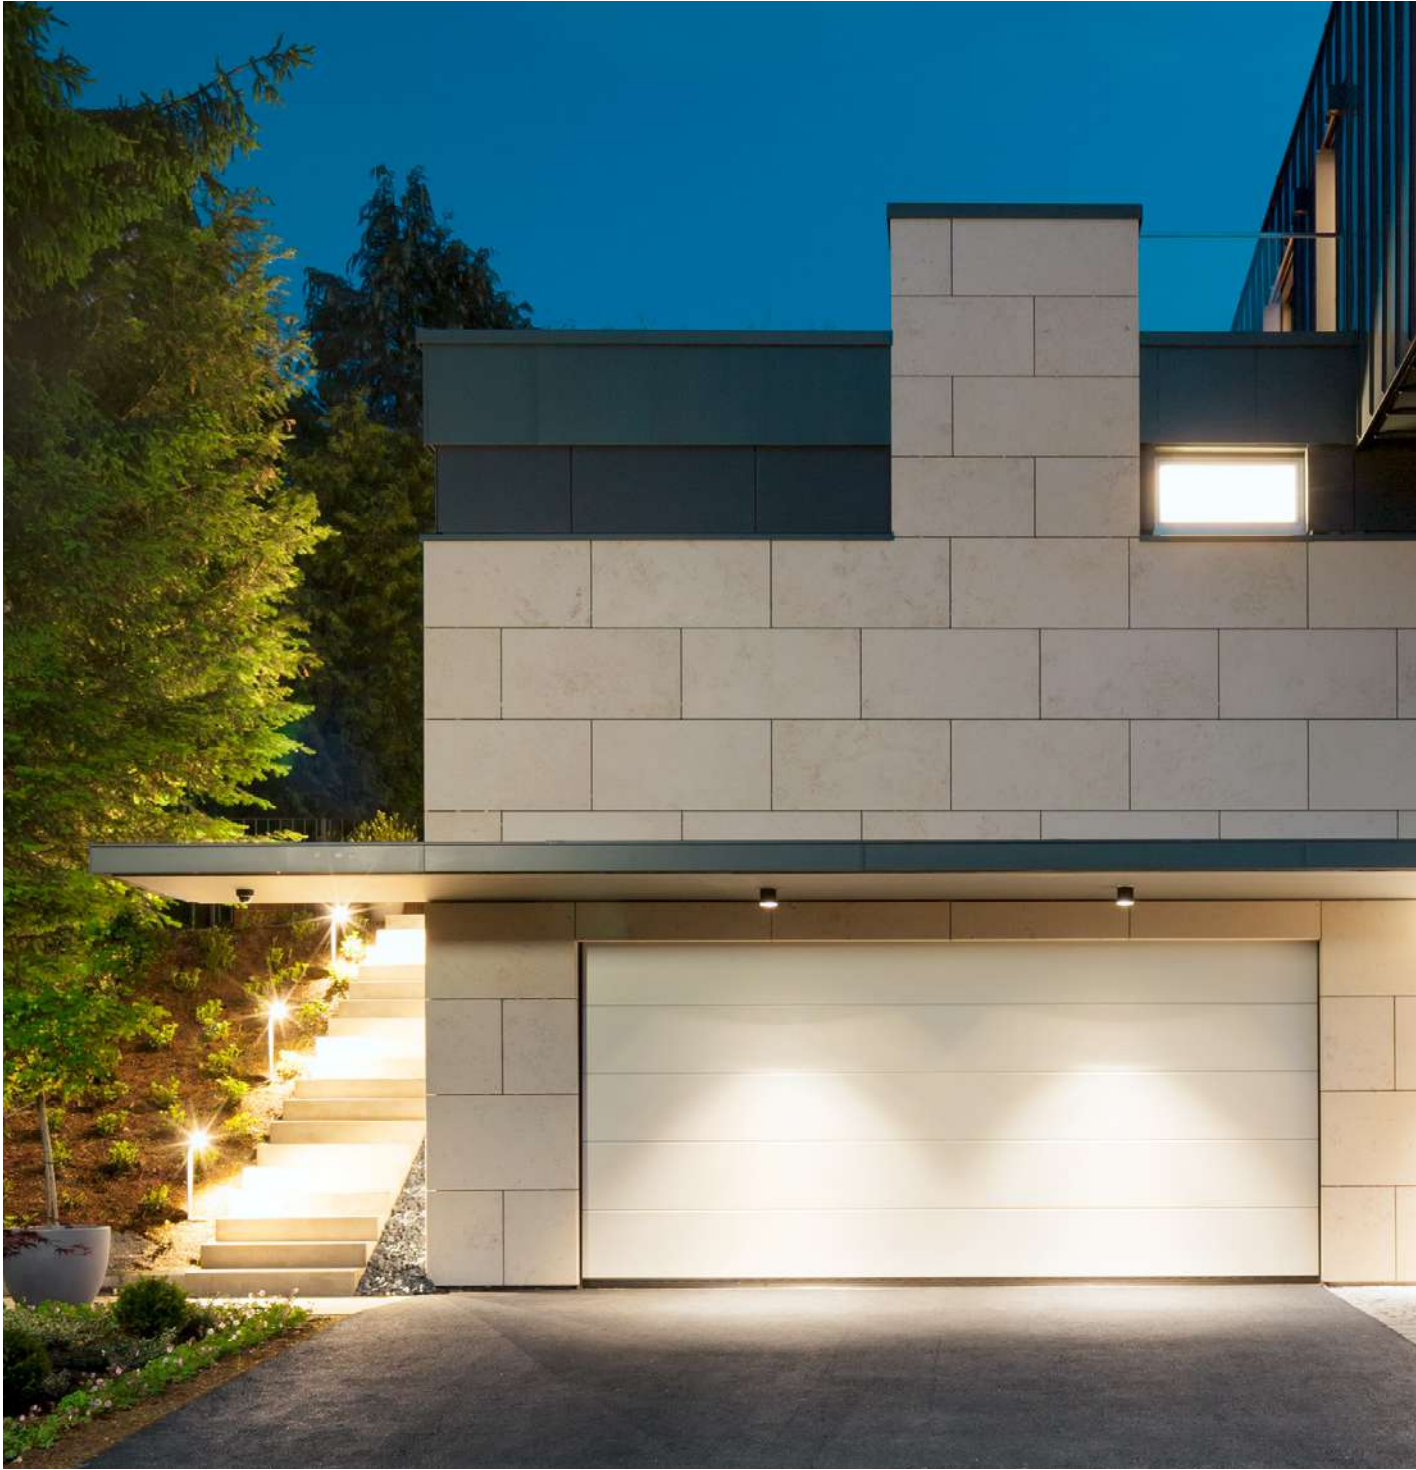

PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA



1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⚡ M-32° L80|60K

3000K CRI >90 720lm		
	CHF	CODE
■	314,65	734464W5
■	314,65	734464D5
■	314,65	734464A5
■	314,65	734464B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

🔊 ⊕ IP65


	CHF	CODE
■	215,30	734220W0
■	215,30	734220D0
■	215,30	734220A0
■	215,30	734220Q0
■	215,30	734220B0

OPTIONAL

	CHF	CODE
■ 2700K 350lm	17,95	905227S2
■ 3000K 350lm	17,95	905227S4



PRIVATE RESIDENCE FRANCE



OPTIONAL

inner reflector

	CHF	CODE
	29,00	911211W1
	29,00	911211D1
	29,00	911211Q1
	29,00	911211B1

inner cover

	CHF	CODE
	31,75	911011W1
	31,75	911011D1
	31,75	911011Q1
	31,75	911011B1

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⚡ M-21° L70|50K

	CHF	CODE
	241,50	735258W_
	241,50	735258D_
	241,50	735258A_
	241,50	735258Q_
	241,50	735258B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >90	3
3000K	620 >90	5
2000-3000K	415 >90	9

BOX

Outdoor
Ceiling surface




235



335



607



815







PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA



BLAS

Outdoor
Ceiling surface



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

⊕ IP65 L80|50K

3000K | CRI >90 | 950lm

	CHF	CODE
	314,65	736387W5
	314,65	736387A5
	314,65	736387Q5
	314,65	736387B5

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

⊕ IP65 L80|50K

3000K | CRI >90 | 950lm

	CHF	CODE
	336,75	736487W5
	336,75	736487A5
	336,75	736487Q5
	336,75	736487B5



clear + frosted
glass







PRIVATE RESIDENCE BELGIUM

ROB

Outdoor
Ceiling surface



301

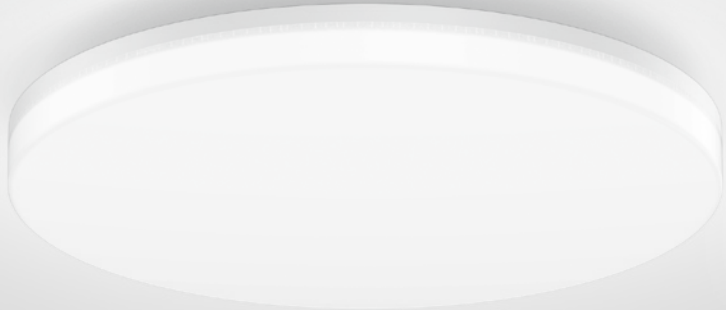


1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 0.70kg

	CHF	CODE
	231,85	701188W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1170 >90	3
3000K	1220 >90	5




2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 1.20kg

	CHF	CODE
	338,10	701288W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1800 >90	3
3000K	1810 >90	5



3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 1.90kg

	CHF	CODE
	462,30	701388W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3340 >90	3
3000K	3360 >90	5




302





3-step output selector






3000K – 6000K colour switch

ROSS

Outdoor
Ceiling surface



307



1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via
dip switch

⊕ IP54 L80|50K

3000K/4000K/6000K CRI >90			960lm/1170lm/1630lm		
	CHF	CODE		CHF	CODE
	109,05	715184W9			

2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via
dip switch

⊕ IP54 L80|50K

3000K/4000K/6000K CRI >90			1270lm/1810lm/2360lm		
	CHF	CODE		CHF	CODE
	178,05	715284W9			

3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via
dip switch

⊕ IP54 L80|50K

3000K/4000K/6000K CRI >90			4350lm/5000lm/5570lm		
	CHF	CODE		CHF	CODE
	310,50	715384W9			

TRADORA
CEILING SUSPENDED
page 777



TRADORA
CEILING SURFACE
page 775



TRADORA
WALL SURFACE
page 823



CLASCO
WALL SURFACE
page 791



classic

collection

OH, HOW ROMANTIC

Wer Belgien besucht hat, kennt die romantischen Landhäuser mit hölzernen Fensterläden, in die man am liebsten sofort einziehen würde. Ihr verspielter historischer Stil macht sie so warm und einladend – mit Elementen von handgefertigten Möbeln bis zu den traditionellen Leuchten der neuen CLASSIC COLLECTION.

Qui a visité la Belgique connaît ces maisons de campagne romantiques aux volets en bois, dans lesquelles on voudrait aussitôt s'installer. Leur style historique et ludique leur confère une atmosphère chaleureuse – des meubles faits main aux luminaires traditionnels de la nouvelle CLASSIC COLLECTION.




weverducre.com/classic-collection



TRADORA

Outdoor
Ceiling surface



777



823

1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

⊕ IP65 L80|50K

2700K | CRI >90 | 350lm



	CHF	CODE
	503,70	760284CL3
	503,70	760284CQ3
	489,90	760284B3

 back



TRADORA

Outdoor
Ceiling suspended



775



823

1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

⊕ IP65 L80|50K

	CHF	CODE
	517,50	760384CL3
	517,50	760384CQ3
	503,70	760384B3

back

GUIDE LIGHTS



RETO 0.8
781



RETO 1.3
781



RETO 2.0
783



ORIS 0.7
785




ORIS 2.0
785



ORIS 0.8
787





ORIS 1.3
787

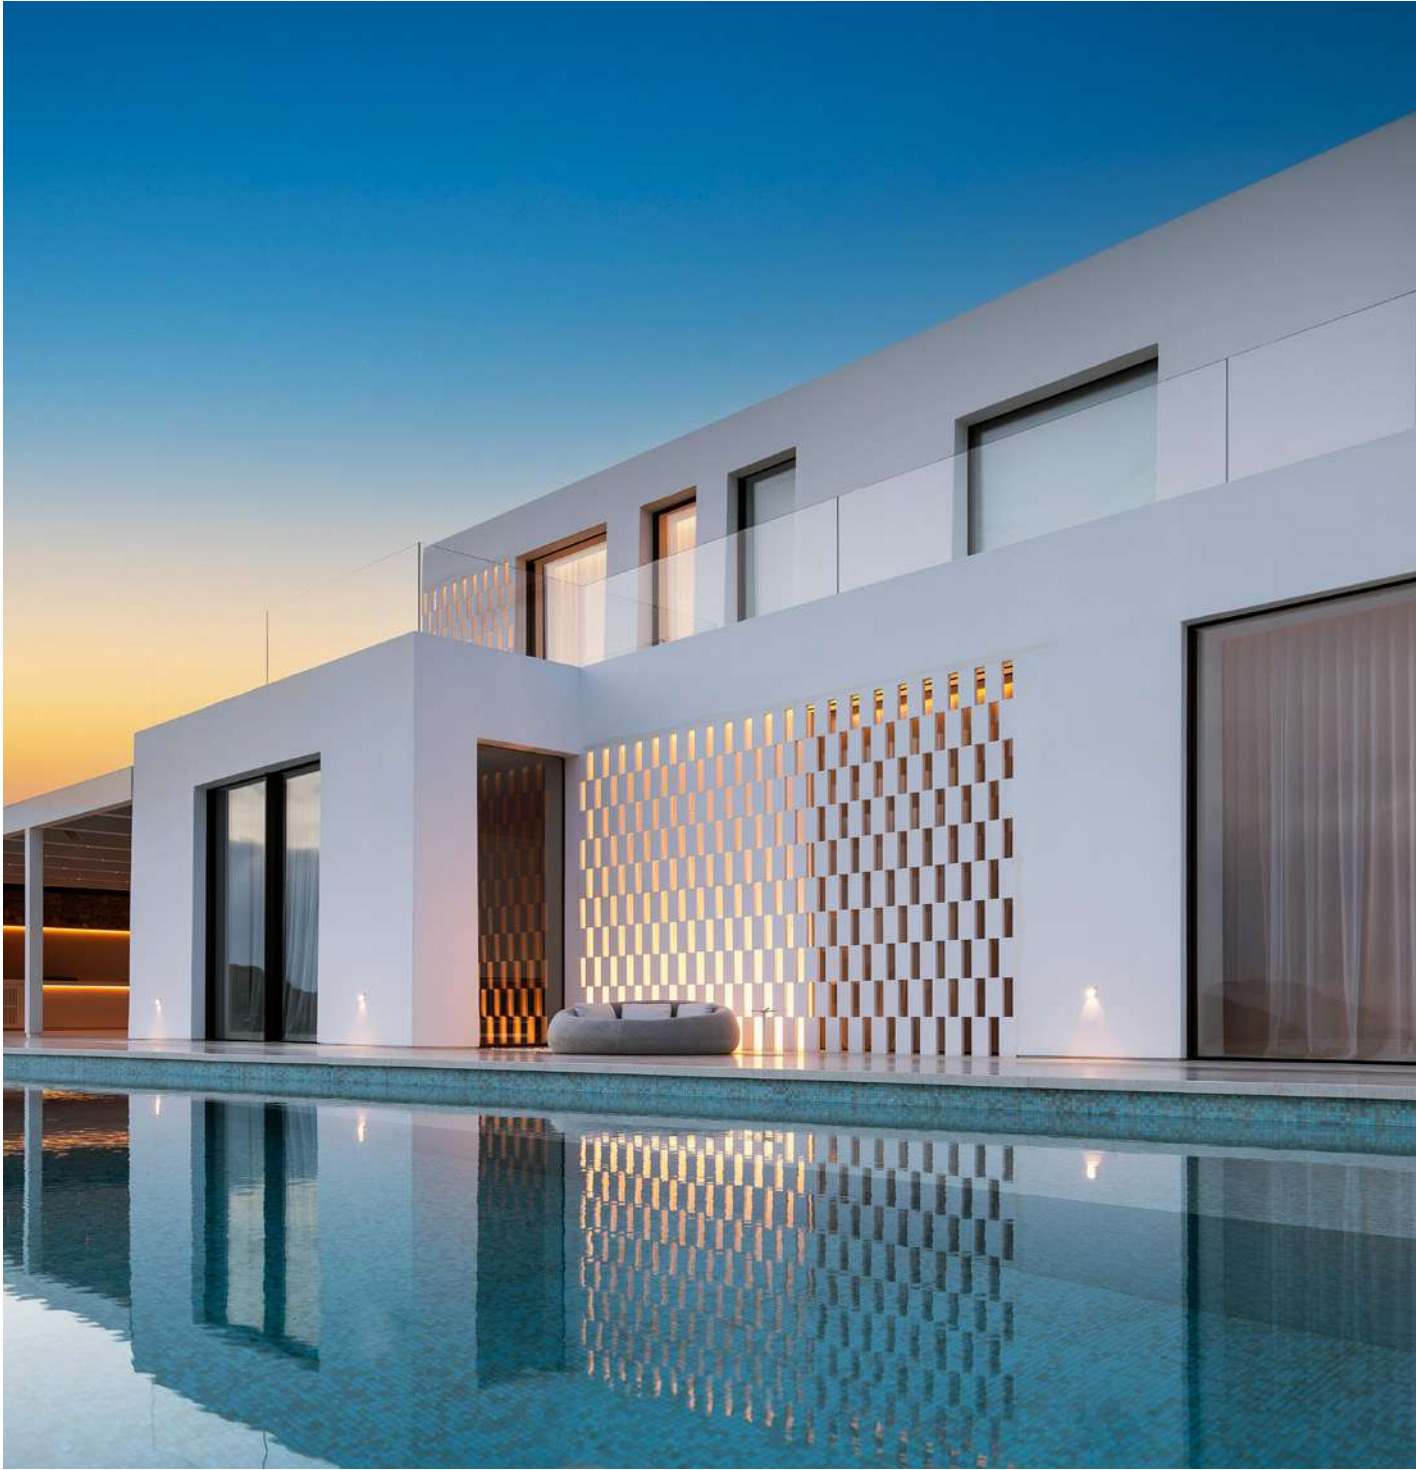

PRIVATE RESIDENCE GREECE

RETO

Outdoor
Wall recessed



0.8

LED PCB 3W | const. volt. | 24V
aluminium

IP65 L80/50K

66x66 40 min. 12

	CHF	CODE
	143,55	7451A2A5
	143,55	7451A2Q5
	143,55	7451A2B5

1.3

LED PCB 5W | const. volt. | 24V
aluminium

IP65 L80/50K

115x117 40 min. 12

	CHF	CODE
	198,75	7452A2A5
	198,75	7452A2Q5
	198,75	7452A2B5

ALWAYS USE

driver | IP67

	CHF	CODE
24V 35W	67,65	90212802
24V 100W	199,55	90212903

specs on page 901

OPTIONAL

recessed housing incl. plasterkit*

	CHF	CODE
	63,50	90012047

concrete housing*

	CHF	CODE
	44,20	90012046

*driver to be placed externally

ALWAYS USE

driver | IP67

	CHF	CODE
24V 35W	67,65	90212802
24V 100W	199,55	90212903

specs on page 901

OPTIONAL


recessed housing incl. plasterkit*

	CHF	CODE
	71,80	90012041

concrete housing*


	CHF	CODE
	53,85	90012040

*driver to be placed externally

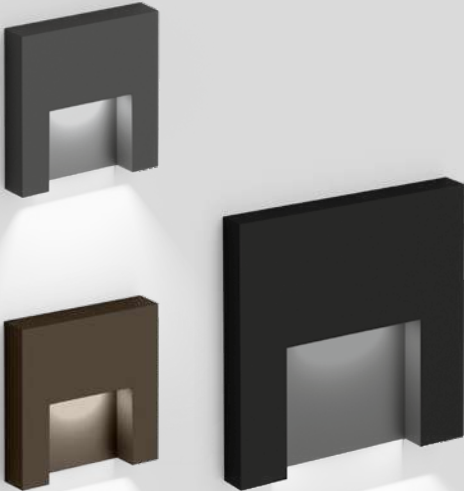




PRIVATE RESIDENCE AUSTRIA

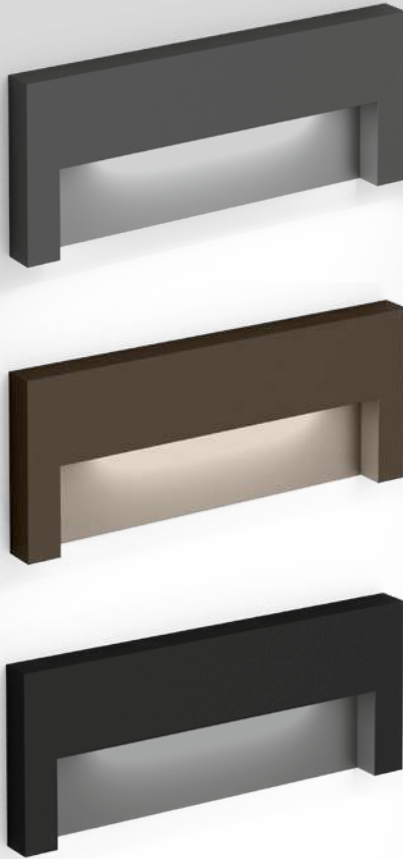

RETO

Outdoor
Wall recessed



2.0

LED PCB 7W | const. volt. | 24V
aluminium

IP65 L80|50K

47x182 40 min. 12

3000K | CRI >90 | 330lm

	CHF	CODE
	241,50	7453A2A5
	241,50	7453A2Q5
	241,50	7453A2B5

ALWAYS USE

driver | IP67

	CHF	CODE
24V 35W	67,65	90212802
24V 100W	199,55	90212903

specs on page 901

OPTIONAL

recessed housing incl. plasterkit*

	CHF	CODE
	62,10	90012039

concrete housing*

	CHF	CODE
	52,45	90012044


*driver to be placed externally



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

ORIS

Outdoor
Wall recessed



0.7

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP65 L70|60K

47x182 40 min. 12

	CHF	CODE
	149,05	7091A1W5
	149,05	7091A1D5
	149,05	7091A1B5

ALWAYS USE

driver | IP66


	CHF	CODE
3W 350mA	48,30	90213101
7W 500mA	64,20	90214301
7W 700mA	50,40	90215301

more options and specs on page 897

OPTIONAL

	CHF	CODE
recessed housing incl. plasterkit	62,10	90012039

	CHF	CODE
concrete housing	52,45	90012044



2.0

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x185 40 min. 12

	CHF	CODE
	182,20	7097A1W5
	182,20	7097A1D5
	182,20	7097A1B5

ALWAYS USE

driver | IP66

	CHF	CODE
3W 350mA	48,30	90213101
7W 500mA	64,20	90214301
7W 700mA	50,40	90215301

more options and specs on page 897

OPTIONAL

	CHF	CODE
recessed housing incl. plasterkit	80,05	90012043



	CHF	CODE
concrete housing	58,00	90012042



PRIVATE RESIDENCE ARTIO STUDIO/MARTA DE LOZOYA SPAIN

ORIS

Outdoor
Wall recessed



0.8

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP65 L70|60K

66x66 11.40 12

3000K | CRI >90 | 90/150lm

	CHF	CODE
	135,25	7094A1W5
	135,25	7094A1A5
	135,25	7094A1Q5
	135,25	7094A1B5

1.3

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x117 11.40 12

3000K | CRI >90 | 145/220lm

	CHF	CODE
	168,40	7096A1W5
	168,40	7096A1D5
	168,40	7096A1A5
	168,40	7096A1Q5
	168,40	7096A1B5

ALWAYS USE

driver | IP66

	CHF	CODE
3W 350mA	48,30	90213101
7W 500mA	64,20	90214301
7W 700mA	50,40	90215301

more options and specs on page 897

OPTIONAL

recessed housing incl. plasterkit

	CHF	CODE
	63,50	90012047

concrete housing

	CHF	CODE
	44,20	90012046

ALWAYS USE

driver | IP66

	CHF	CODE
3W 350mA	48,30	90213101
7W 500mA	64,20	90214301
7W 700mA	50,40	90215301

more options and specs on page 897


OPTIONAL

recessed housing incl. plasterkit

	CHF	CODE
	71,80	90012041

concrete housing

	CHF	CODE
	53,85	90012040

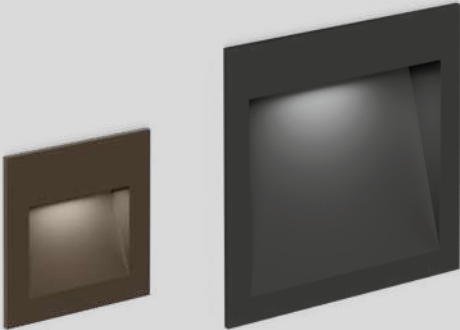

LUMINAIRES



CLASCO
791



KIOSK
793



TRAM
797



TUBE 1.0
799



TUBE 2.0
801



TAIO
803



RAY 1.0 | 2.0
805



RAY 4.0
805



TRAIN
807



CENTRAL
809



TUBE CARRÉ 1.0
811



TUBE CARRÉ 2.0
813



BOX 1.0 | 2.0
815



BOX 4.0
815



TAPE
817



PALOS 1.0
819



PALOS 2.0
819



PALOS 3.0
819



SWAM
821



TRADORA
823



RIBELLE
825



BLAS 1.0
827



BLAS 2.0
827

SPOT LIGHTS



X-BEAM
829



X-BEAM ROUND
829

GUIDE LIGHTS



PAVIO
831



RETO ROUND
833



RETO
835



CLASCO

Outdoor
Wall surface



1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⚡ W-105° L80|50K



	CHF	CODE
	255,30	759174CL
	245,65	759174A
	255,30	759174AB
	255,30	759174CQ
	245,65	759174Q
	245,65	759174B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	505 >90	3
3000K	520 >90	5



KIOSK

Outdoor
Wall surface



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⌂ L80/50K

	CHF	CODE
	311,90	707174W_
	311,90	707174A_
	311,90	707174Q_
	311,90	707174B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x500 >90	5

2.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⌂ L80/100K

	CHF	CODE
	434,70	707574W_
	434,70	707574A_
	434,70	707574Q_
	434,70	707574B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x960 >90	3
3000K	2x1000 >90	5



back







PRIVATE RESIDENCE | ARCH & LIVING - THE ART OF HOME AUSTRIA





PRIVATE RESIDENCE AUSTRIA

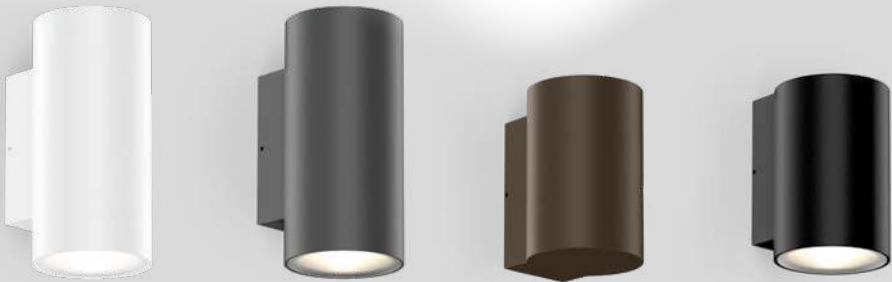


1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ▼ ▲ M-36° L70|55K

3000K | CRI >90 | 555lm

	CHF	CODE
	231,85	747568W5
	231,85	747568A5
	231,85	747568Q5
	231,85	747568B5



2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⏸ ▲ M-36° L70|55K

3000K | CRI >90 | 2x360lm

	CHF	CODE
	300,85	747668W5
	300,85	747668A5
	300,85	747668Q5
	300,85	747668B5






753





TUBE

Outdoor
Wall surface

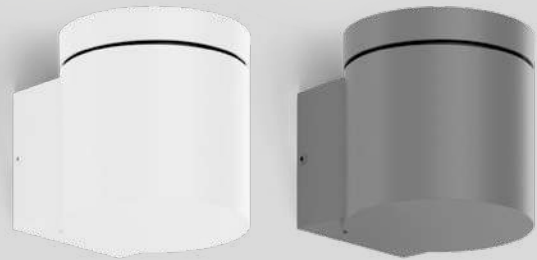

1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ▼ ▲ M-36° L80|60K

3000K | CRI >90 | 635lm

	CHF	CODE
	259,45	711364W5
	259,45	711364D5
	259,45	711364A5
	259,45	711364B5

1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ▼ ▲

	CHF	CODE
	129,75	711120W0
	129,75	711120D0
	129,75	711120A0
	129,75	711120Q0
	129,75	711120B0

OPTIONAL

PAR16 3.7W | GU10

	CHF	CODE
2700K 350lm	17,95	905227S2
3000K 350lm	17,95	905227S4





755





TUBE

Outdoor
Wall surface



2.0 LED

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⏻ M-36° L80|60K

3000K | CRI >90 | 2x635lm

	CHF	CODE
	397,45	711464W5
	397,45	711464D5
	397,45	711464A5
	397,45	711464B5

2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⏻

	CHF	CODE
	176,65	711220W0
	176,65	711220D0
	176,65	711220A0
	176,65	711220Q0
	176,65	711220B0


OPTIONAL

PAR16 3.7W | GU10


	CHF	CODE
2700K 350lm	17,95	905227S2
3000K 350lm	17,95	905227S4




W




D



Q



A





B



PRIVATE RESIDENCE | GC ARCHITECTEN BELGIUM

TAIO

Outdoor
Wall surface



1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

⊕ IP65 ▽ ▲ W-105° L80/55K

	CHF	CODE
	255,30	180584W_
	255,30	180584A_
	255,30	180584Q_
	255,30	180584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	435 >90	3
3000K	490 >90	5


2.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

⊕ IP65 ⏸ ▲ W-105° L80/55K


	CHF	CODE
	393,30	180684W_
	393,30	180684A_
	393,30	180684Q_
	393,30	180684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x435 >90	3
3000K	2x490 >90	5





LOXONE VERSIONS ONLINE
weverducre.com/more-ray-wall

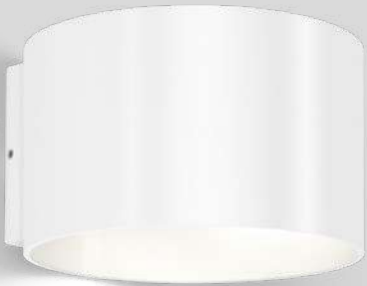

1.0


LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ▼ ▲ L80|55K

	CHF	CODE
	273,25	749168W_
	273,25	749168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5



2.0


LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⏸ L80|55K

	CHF	CODE
	302,25	749148W_
	302,25	749148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5



4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⏸ L80|55K

	CHF	CODE
	322,25	749248W_
	322,25	749248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5

RAY

Outdoor
Wall surface



251



341 | 377 | 393



537



615



759



804



805



806



807



808



809



810



811





812



TRAIN

Outdoor
Wall surface

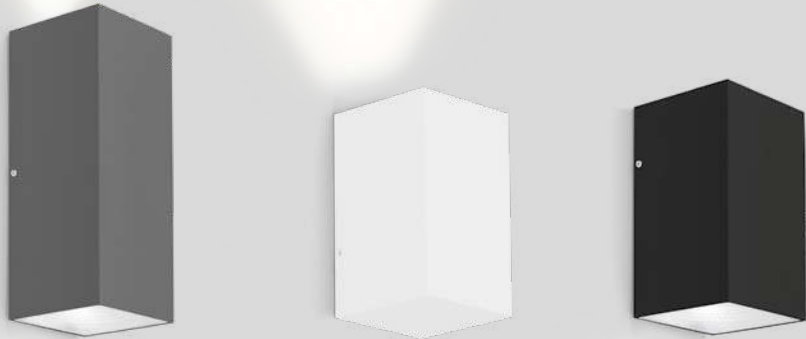


1.0 NARROW

LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium
narrow up or narrow down lens

⊕ IP65 ▼ ▲ W-55°x5° L80|60K

3000K | CRI >80 | 170lm

	CHF	CODE
■	245,65	718143B4




1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ▼ ▲ M-38° L70|55K

3000K | CRI >90 | 530lm

	CHF	CODE
■	231,85	718868W5
■	231,85	718868A5
■	231,85	718868B5




2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⏸ ▲ M-38° L70|55K

3000K | CRI >90 | 2x375lm

	CHF	CODE
■	300,85	718968W5
■	300,85	718968A5
■	300,85	718968B5



761







PRIVATE RESIDENCE | OLSTE & HOPROM BELGIUM

CENTRAL

Outdoor
Wall surface



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ▼ ⚡ L80/60K

3000K | CRI >90 | 620lm

	CHF	CODE
White	300,85	313774W5
Dark Grey	300,85	313774A5
Medium Grey	300,85	313774Q5
Black	300,85	313774B5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⌂ L80/60K

3000K | CRI >90 | 2x330lm




	CHF	CODE
White	351,90	313874W5
Dark Grey	351,90	313874A5
Medium Grey	351,90	313874Q5
Black	351,90	313874B5



PRIVATE RESIDENCE | TRANSFORM ARCHITECTUUR BELGIUM

TUBE CARRÉ

Outdoor
Wall surface

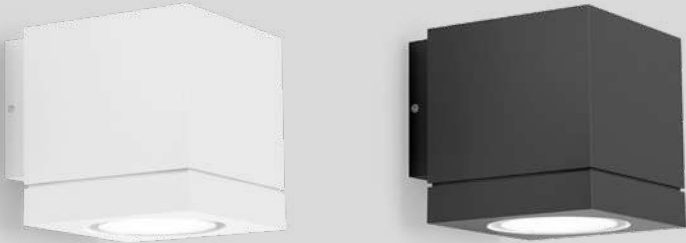

1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ▼ ▲ ⚡ M-32° L80/60K

3000K CRI >90 715lm		
	CHF	CODE
	287,05	744364W5
	287,05	744364D5
	287,05	744364A5
	287,05	744364B5

1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

🔊 ⊕ IP65 ▼ ▲



	CHF	CODE
	187,70	744120W0
	187,70	744120D0
	187,70	744120A0
	187,70	744120Q0
	187,70	744120B0

OPTIONAL

PAR16 3.7W GU10		
	CHF	CODE
 2700K 350lm	17,95	905227S2
 3000K 350lm	17,95	905227S4



PRIVATE RESIDENCE | MAA ARCHITECTURE STUDIO & ZPLUS ARCHITECTURE BELGIUM






2.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⌂ M-36° L80/60K

3000K | CRI >90 | 2x745lm

	CHF	CODE
	426,45	744464W5
	426,45	744464D5
	426,45	744464A5
	426,45	744464B5



TUBE CARRÉ

Outdoor
Wall surface

2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⌂

	CHF	CODE
	247,05	744220W0
	247,05	744220D0
	247,05	744220A0
	247,05	744220Q0
	247,05	744220B0

OPTIONAL

PAR16 3.7W | GU10

	CHF	CODE
 2700K 350lm	17,95	905227S2
 3000K 350lm	17,95	905227S4





763






PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN



MORE VERSIONS + LOXONE ONLINE
weverducre.com/more-box-wall



1.0


LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⚡ L80|55K

	CHF	CODE
	273,25	748168W_
	273,25	748168D_
	273,25	748168A_
	273,25	748168Q_
	273,25	748168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5



2.0


LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⚡ L80|55K

	CHF	CODE
	302,25	748148W_
	302,25	748148D_
	302,25	748148A_
	302,25	748148Q_
	302,25	748148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5



4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 ⚡ L80|55K

	CHF	CODE
	322,95	748248W_
	322,95	748248D_
	322,95	748248Q_
	322,95	748248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5

BOX

Outdoor
Wall surface



235



335



607



765





PRIVATE RESIDENCE AUSTRIA

TAPE

Outdoor
Wall surface

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80/60K

3000K | CRI >90 | 425lm

	CHF	CODE
	411,25	722174W5
	411,25	722174D5
	411,25	722174A5
	411,25	722174B5

WEVER & DUCRÉ 816 — 817






PRIVATE RESIDENCE | BAUBUREAU OG 27 SWITZERLAND

PALOS

Outdoor
Wall surface




1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	365,70	4161A4A_
	365,70	4161A4Q_
	365,70	4161A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	680 >80	2
3000K	700 >80	4




2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	452,65	4162A4A_
	452,65	4162A4Q_
	452,65	4162A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x600 >80	2
3000K	2x620 >80	4



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	310,50	4163A4A_
	310,50	4163A4Q_
	310,50	4163A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	745 >80	2
3000K	770 >80	4







PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR THE NETHERLANDS

SWAM

Outdoor
Wall surface




1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 L80|60K

2700K | CRI >90 | 410lm

	CHF	CODE
	329,85	746278Q3
	342,25	746278K3
	329,85	746278B3



2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 L80|60K

2700K | CRI >90 | 670lm


	CHF	CODE
	390,55	746378Q3
	405,75	746378K3
	390,55	746378B3





TRADORA

Outdoor
Wall surface



775



777



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

⊕ IP65 L80|50K

2700K | CRI >90 | 350lm


	CHF	CODE
	503,70	760184CL3
	503,70	760184CQ3
	489,90	760184B3

 back



RIBELLE

Outdoor
Wall surface



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP65 L80/100K

	CHF	CODE
	448,50	772184A
	448,50	772184Q



LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	425 >90	5



back



PRIVATE RESIDENCE BELGIUM



767

1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

⊕ IP65 L80/50K

3000K | CRI >90 | 950lm

	CHF	CODE
	314,65	736387W5
	314,65	736387B5

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

⊕ IP65 L80/50K



3000K | CRI >90 | 950lm

	CHF	CODE
	336,75	736487W5
	336,75	736487B5








SHOWROOM CHILLOUT AREA GRAZ | AUSTRIA



X-BEAM

Outdoor
Wall surface



OPTIONAL

snoot	CHF	CODE
	48,30	90019023

snoot round	CHF	CODE
	476,10	700374D4
	476,10	700374A4
	476,10	700374B4

specs on page 911

1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

☐ IP65 ▽ ▲ 0-110° ⚡ W-108° L80|60K

3000K | CRI >80 | 1590lm

	CHF	CODE
	476,10	700374D4
	476,10	700374A4
	476,10	700374B4

1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

☐ IP65 ▽ ▲ 0-110° ⚡ W-108° L80|60K


3000K | CRI >80 | 1520lm

	CHF	CODE
	476,10	700474A4
	476,10	700474Q4
	476,10	700474B4



PAVIO

Outdoor
Wall surface

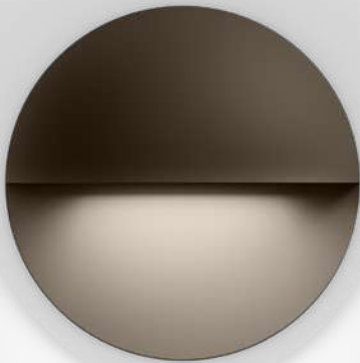


1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|100K

	CHF	CODE
	255,30	351184W5
	255,30	351184Q5
	255,30	351184B5






PRIVATE RESIDENCE SPAIN

RETO ROUND

Outdoor
Wall surface

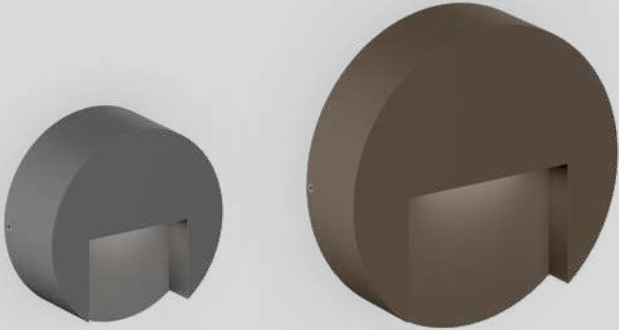

0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|100K

3000K | CRI >90 | 105lm

	CHF	CODE
	218,05	7457A4A5
	218,05	7457A4Q5
	218,05	7457A4B5

1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|100K

3000K | CRI >90 | 160lm



	CHF	CODE
	273,25	7458A4A5
	273,25	7458A4Q5
	273,25	7458A4B5



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

RETO

Outdoor
Wall surface

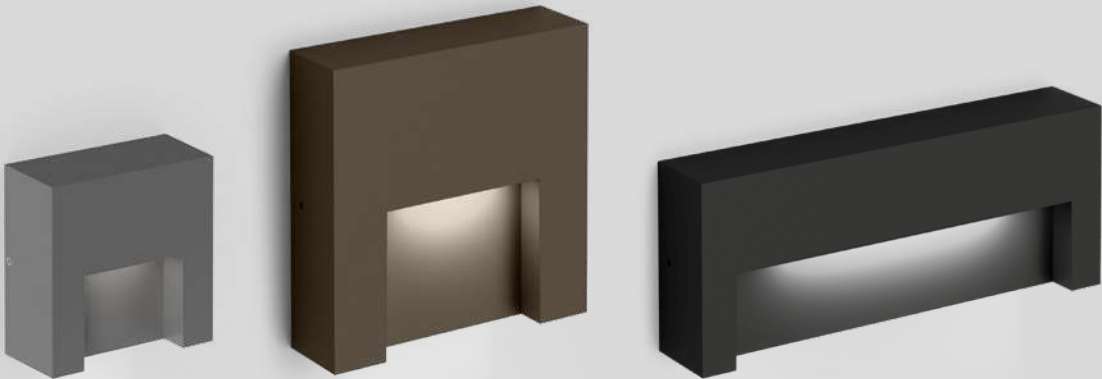


0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|100K

3000K | CRI >90 | 105lm

	CHF	CODE
	218,05	7454A4A5
	218,05	7454A4Q5
	218,05	7454A4B5




1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|50K

3000K | CRI >90 | 160lm

	CHF	CODE
	273,25	7455A4A5
	273,25	7455A4Q5
	273,25	7455A4B5



2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|50K

3000K | CRI >90 | 335lm

	CHF	CODE
	259,45	7456A4A5
	259,45	7456A4Q5
	259,45	7456A4B5



RECESSED



BLINK TRIMLESS
839



BLINK
839



CARD 0.1
843



CARD 0.2
843



MAP
845



MAP ASYM
849



CHART
851



CHART ASYM
853





PRIVATE RESIDENCE GREECE

BLINK

Outdoor
trimless | Floor recessed



1.0 TRIMLESS

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80/S0K

	CHF	CODE
	300,85	721261B5

1.0

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80/S0K

47-49

	CHF	CODE
	282,90	721161B5

ALWAYS USE

driver 500mA	CHF	CODE
7W dim	35,20	90224301
7W IP67	64,20	90214301

more options and specs on page 898

ALWAYS USE


driver 500mA	CHF	CODE
7W dim	35,20	90224301
7W IP67	64,20	90214301

more options and specs on page 898

ALWAYS USE


recessed ground housing | polyamide

137 JTL110



	CHF	CODE
	34,50	90012201

137 JTL110



	CHF	CODE
	34,50	90012201





BLINK

Outdoor
trimless | Floor recessed



2.0 TRIMLESS

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80/50K

	CHF	CODE
3000K CRI >90 700lm	329,85	721461B5

ALWAYS USE

driver 500mA	CHF	CODE
20W dim	62,80	90224602
24W IP68	102,15	90214702

more options and specs on page 898

ALWAYS USE

recessed ground housing | polyamide

137 TL130



	CHF	CODE
46,95	90012202	

2.0

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80/50K

84-86

	CHF	CODE
3000K CRI >90 700lm	316,05	721361B5

ALWAYS USE

driver 500mA	CHF	CODE
20W dim	62,80	90224602
24W IP68	102,15	90214702

more options and specs on page 898

OPTIONAL

recessed ground housing | polyamide

137 TL130



	CHF	CODE
46,95	90012202	




back



CARD

Outdoor
Floor recessed



O.1

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass


IP67 IK07 N-16° L70|60K

22-24 60

3000K CRI >80 90lm	
CHF	CODE
118,70	750141I4

ALWAYS USE

driver IP66	
CHF	CODE
3W 350mA 48,30	90213101
more options and specs on page 897	



O.2

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 N-16° L70|60K

22-24 60

3000K CRI >80 90lm	
CHF	CODE
146,30	750241I4

ALWAYS USE

driver IP66	
CHF	CODE
3W 350mA 48,30	90213101
more options and specs on page 897	






PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

MAP

Outdoor
Floor recessed




0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

☐ IP67 IK08 ⚡ W-43° L70|55K

⌈ TL100

	CHF	CODE
	282,90	751168I5



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

☐ IP67 IK08 ⚡ M-35° L70|55K


⌈ TL135

	CHF	CODE
	314,65	751268I5

OPTIONAL

recessed ground housing | polyamide

⌚ 137 ⌈ TL110



	CHF	CODE
	34,50	90012201

OPTIONAL

recessed ground housing | polyamide

⌚ 137 ⌈ TL130




	CHF	CODE
	46,95	90012202





MAP

Outdoor
Floor recessed



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

□ IP67 IK08 ∠ W-44° L70|55K


⌈⌋ L120

	CHF	CODE
	383,65	751368I5


OPTIONAL

recessed ground housing | polyamide

⌚ 190 ⌈⌋ L158



	CHF	CODE
	64,90	90012203



1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

□ IP67 IK09 ∠ M-38° L70|55K


⌈⌋ L185

	CHF	CODE
	565,80	751468I5

OPTIONAL

recessed ground housing | polyamide

⌚ 220 ⌈⌋ L184



	CHF	CODE
	84,20	90012204





PRIVATE RESIDENCE OBUMEX – STEENOVÉN BELGIUM

MAP ASYM

Outdoor
Floor recessed



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K

160

3000K CRI >90 565lm	
CHF	CODE
411,25	7515A8I5



1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K


185

3000K CRI >90 845lm	
CHF	CODE
607,20	7516A8I5

OPTIONAL

recessed ground housing | polyamide

190 158




CHF	CODE
64,90	90012203

OPTIONAL

recessed ground housing | polyamide

220 184



CHF	CODE
84,20	90012204






PRIVATE RESIDENCE FRANCE



CHART

Outdoor
Floor recessed



0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

☐ IP67 IK08 $\angle$ W-43° L70|55K


⌈⌋ 118

3000K CRI >90 310lm	
CHF	CODE
287,05	752168I5


OPTIONAL

recessed ground housing | polyamide

⌚ 137 ⌈⌋ 110



CHF	CODE
34,50	90012201



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

☐ IP67 IK08 $\angle$ M-35° L70|55K


⌈⌋ 135

3000K CRI >90 640lm	
CHF	CODE
322,95	752268I5


OPTIONAL

recessed ground housing | polyamide

⌚ 137 ⌈⌋ 130



CHF	CODE
46,95	90012202



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

☐ IP67 IK08 $\angle$ W-44° L70|55K


⌈⌋ 175

3000K CRI >90 995lm	
CHF	CODE
393,30	752368I5


OPTIONAL

recessed ground housing | polyamide

⌚ 190 ⌈⌋ 158



CHF	CODE
64,90	90012203



1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

☐ IP67 IK09 $\angle$ M-38° L70|55K


⌈⌋ 185

3000K CRI >90 1260lm	
CHF	CODE
586,50	752468I5

OPTIONAL

recessed ground housing | polyamide

⌚ 220 ⌈⌋ 184




CHF	CODE
84,20	90012204



CHART ASYM

Outdoor
Floor recessed



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K


160

	CHF	CODE
	420,90	7525A8I5


OPTIONAL

recessed ground housing | polyamide

190 158



	CHF	CODE
	64,90	90012203



1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K


185

	CHF	CODE
	627,90	7526A8I5

OPTIONAL

recessed ground housing | polyamide

220 184



	CHF	CODE
	84,20	90012204



LUMINAIRES

- 

KIOSK 1.1
857
- 

KIOSK 1.2
857
- 

KIOSK 1.3
857
- 

SWAM
859
- 

SWAM
859

PROJECTORS

- 

STIPO 1.0
863
- 

STIPO 4.0
863
- 

X-BEAM
865
- 

X-BEAM ROUND
865

BOLLARDS

- 

RIBELLE
867
- 

GATE ROUND 1.0
869
- 

GATE ROUND 2.0
869
- 

GATE CARRÉ 1.0
871
- 

GATE CARRÉ 2.0
871

- 

PALOS ROUND
873
- 

PALOS CARRÉ
877
- 

LINUS
881

PLUG & PLAY

- 

GEO 1.0
885
- 

GEO 2.0
885
- 

REED 1.0
887
- 

REED 2.0
887
- 

POLA 2.0
889

- 

POLA 2.1
889






PRIVATE RESIDENCE SPAIN



KIOSK

Outdoor
Floor surface



1.1

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|50K

3000K CRI >90 395lm		
	CHF	CODE
■	242,90	7072A4A5
■	242,90	7072A4Q5

ALWAYS USE


pole incl. ground spike		
	CHF	CODE
400	157,35	910101_0
600	172,50	910102_0
800	190,45	910103_0

	CODE
■	A
■	Q

order fixation separately

OPTIONAL

ground fixation plate		
	CHF	CODE
■	30,40	90019019



1.2

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|50K

3000K CRI >90 2x380lm		
	CHF	CODE
■	273,25	7073A4A5
■	273,25	7073A4Q5

ALWAYS USE


pole incl. ground spike		
	CHF	CODE
400	157,35	910101_0
600	172,50	910102_0
800	190,45	910103_0

	CODE
■	A
■	Q

order fixation separately

OPTIONAL

ground fixation plate		
	CHF	CODE
■	30,40	90019019



1.3

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|50K

3000K CRI >90 3x375lm		
	CHF	CODE
■	328,45	7074A4A5
■	328,45	7074A4Q5

ALWAYS USE

pole incl. ground spike		
	CHF	CODE
400	157,35	910101_0
600	172,50	910102_0
800	190,45	910103_0

	CODE
■	A
■	Q

order fixation separately

OPTIONAL

ground fixation plate		
	CHF	CODE
■	30,40	90019019






PRIVATE RESIDENCE AUSTRIA



SWAM

Outdoor
Floor surface



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 L80|60K

2700K | CRI >90 | 310lm

	CHF	CODE
	379,50	746178Q3
	390,55	746178K3
	379,50	746178B3

ALWAYS USE

straight pole | incl. ground spike

	CHF	CODE
400	142,15	910090_0
600	158,70	910091_0
800	176,65	910092_0


	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CHF	CODE
	30,40	90019019



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 L80|60K

2700K | CRI >90 | 310lm

	CHF	CODE
	379,50	746178Q3
	390,55	746178K3
	379,50	746178B3

ALWAYS USE

curved pole | incl. ground spike

	CHF	CODE
400	196,00	910093_0
600	198,75	910094_0
800	213,90	910095_0

	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CHF	CODE
	30,40	90019019






HOTEL BRITANNIA | S-CONSULTANCY KNOKKE-HEIST | BELGIUM






SHOWROOM CHILLOUT AREA GRAZ | AUSTRIA



STIPO

Outdoor
Floor surface




1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

☐ IP65 135° ▲ M-38° L70|55K

3000K CRI >90 450lm		
	CHF	CODE
■	274,65	737168A5
■	274,65	737168Q5




2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

☐ IP65 135° ▲ M-38° L70|55K

3000K CRI >90 500lm		
	CHF	CODE
■	271,90	737268A5
■	271,90	737268Q5




3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

☐ IP65 135° ▲ M-38° L70|55K

3000K CRI >90 450lm		
	CHF	CODE
■	270,50	737368A5
■	270,50	737368Q5



4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

☐ IP65 135° ▲ M-38° L70|55K

3000K CRI >90 500lm		
	CHF	CODE
■	267,75	737468A5
■	267,75	737468Q5

ALWAYS USE

pole

	CHF	CODE
200	46,95	910062_0
400	52,45	910064_0
600	56,60	910066_0

	CODE
■	A
■	Q

order spike separately

OPTIONAL

ground spike

	CHF	CODE
■	37,30	90013106

OPTIONAL

ground spike

	CHF	CODE
■	37,30	90013106

OPTIONAL

ground spike

	CHF	CODE
■	37,30	90013106

ALWAYS USE

pole

	CHF	CODE
200	46,95	910062_0
400	52,45	910064_0
600	56,60	910066_0

	CODE
■	A
■	Q

order spike separately

OPTIONAL

ground spike

	CHF	CODE
■	37,30	90013106






PRIVATE RESIDENCE GREECE

X-BEAM

Outdoor
Floor surface



OPTIONAL

ground spike



	CHF	CODE
	40,05	90013115

snoot

	CHF	CODE
	48,30	90019023

snoot round

	CHF	CODE
	48,30	90019031



1.0

LED COB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

☐ IP65 0-110° ⚡ W-108° L80|60K

3000K | CRI >80 | 1590lm

	CHF	CODE
	476,10	700374D4
	476,10	700374A4
	476,10	700374B4



1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

☐ IP65 0-110° ⚡ W-108° L80|60K

3000K | CRI >80 | 1520lm

	CHF	CODE
	476,10	700474A4
	476,10	700474Q4
	476,10	700474B4



829




back



RIBELLE

Outdoor
Floor surface

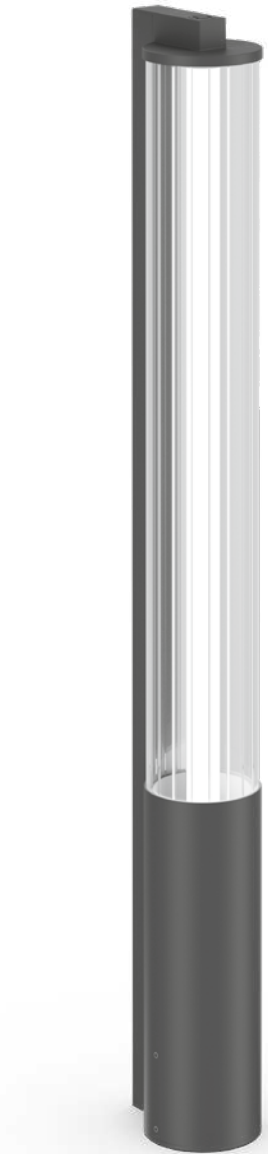


1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP65 L80/100K

	CHF	CODE
	524,40	772284A
	524,40	772284Q

LIGHT COLOUR	LUMEN CRI	CODE
2700K	590 >90	3
3000K	610 >90	5



2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

⊕ IP65 L80/100K



	CHF	CODE
	614,10	772384A
	614,10	772384Q

LIGHT COLOUR	LUMEN CRI	CODE
2700K	590 >90	3
3000K	610 >90	5



GATE ROUND

Outdoor
Floor surface



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

⊕ IP65 L80|50K

	CHF	CODE
	213,90	7581A4A_
	213,90	7581A4Q_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >80	2
3000K	420 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
250	80,05	910121_0
450	95,25	910122_0
650	121,45	910123_0

	CODE
	A
	Q

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

⊕ IP65 L80|50K

	CHF	CODE
	255,30	7582A4A_
	255,30	7582A4Q_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x290 >80	2
3000K	2x305 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
250	80,05	910124_0
450	95,25	910125_0
650	121,45	910126_0

	CODE
	A
	Q

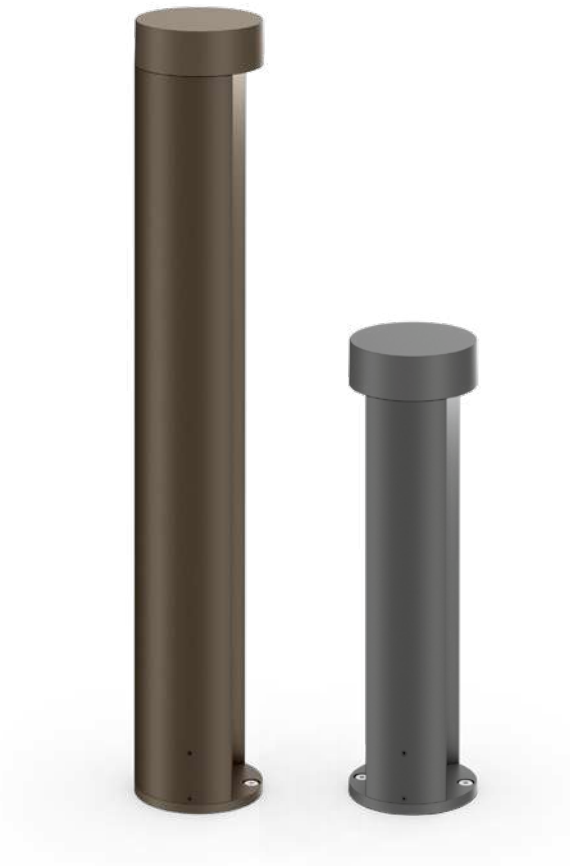



back





GATE CARRÉ

Outdoor
Floor surface



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

⊕ IP65 L80|50K

	CHF	CODE
	218,05	7583A4A_
	218,05	7583A4Q_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >80	2
3000K	420 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
250	91,10	91011L_0
450	106,30	910112_0
650	132,50	910113_0

	CODE
	A
	Q

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

⊕ IP65 L80|50K

	CHF	CODE
	259,45	7584A4A_
	259,45	7584A4Q_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x290 >80	2
3000K	2x305 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
250	91,10	910114_0
450	106,30	910115_0
650	132,50	910116_0

	CODE
	A
	Q

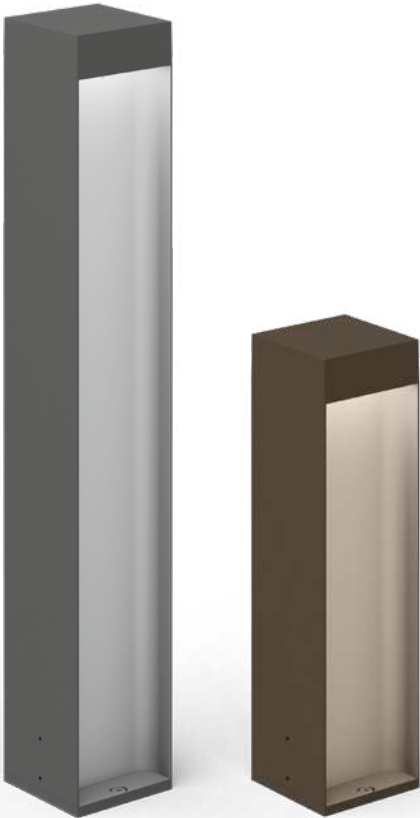

 back





PRIVATE RESIDENCE BELGIUM

PALOS ROUND

Outdoor
Floor surface



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	300,85	4166A4A_
	300,85	4166A4Q_
	300,85	4166A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	680 >80	2
3000K	700 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
170	135,25	910013_0
270	149,05	910014_0
470	169,75	910016_0
670	187,70	910018_0
870	213,90	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	300,85	4166A4A_
	300,85	4166A4Q_
	300,85	4166A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	680 >80	2
3000K	700 >80	4

ALWAYS USE

pole with concrete fixation

	CHF	CODE
170	171,15	910073_0
270	187,70	910074_0
470	204,25	910076_0
670	223,60	910078_0
870	259,45	910070_0

	CODE
	A
	Q
	B

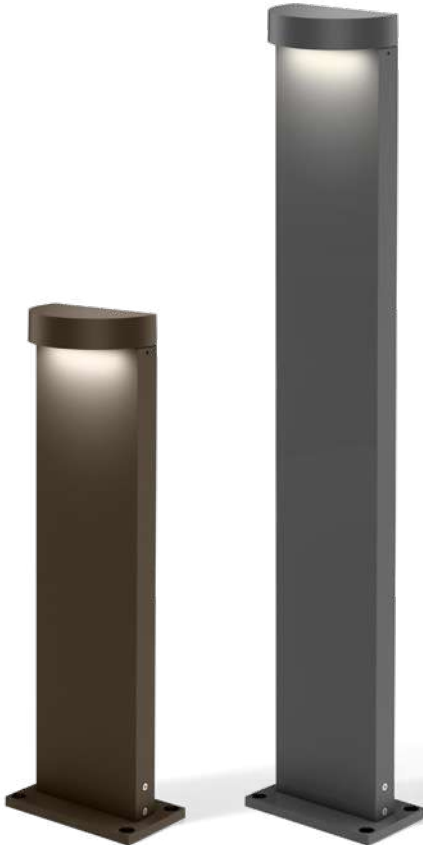


back



PALOS ROUND

Outdoor
Floor surface



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	411,25	4167A4A_
	411,25	4167A4Q_
	411,25	4167A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x655 >80	2
3000K	2x675 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
170	135,25	910013_0
270	149,05	910014_0
470	169,75	910016_0
670	187,70	910018_0
870	213,90	910010_0

	CODE
	A
	Q
	B



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	411,25	4167A4A_
	411,25	4167A4Q_
	411,25	4167A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x655 >80	2
3000K	2x675 >80	4

ALWAYS USE

pole with concrete fixation

	CHF	CODE
170	171,15	910073_0
270	187,70	910074_0
470	204,25	910076_0
670	223,60	910078_0
870	259,45	910070_0

	CODE
	A
	Q
	B

back






PRIVATE RESIDENCE | OPEN ARCHITECTES BELGIUM

PALOS CARRÉ

Outdoor
Floor surface



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	300,85	4164A4A_
	300,85	4164A4Q_
	300,85	4164A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	680 >80	2
3000K	700 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
170	135,25	910013_0
270	149,05	910014_0
470	169,75	910016_0
670	187,70	910018_0
870	213,90	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K g

	CHF	CODE
	300,85	4164A4A_
	300,85	4164A4Q_
	300,85	4164A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	680 >80	2
3000K	700 >80	4

ALWAYS USE

pole with concrete fixation

	CHF	CODE
170	171,15	910073_0
270	187,70	910074_0
470	204,25	910076_0
670	223,60	910078_0
870	259,45	910070_0


	CODE
	A
	Q
	B





PALOS CARRÉ

Outdoor
Floor surface



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	411,25	4165A4A_
	411,25	4165A4Q_
	411,25	4165A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x655 >80	2
3000K	2x675 >80	4

ALWAYS USE

pole with fixation plate

	CHF	CODE
170	135,25	910013_0
270	149,05	910014_0
470	169,75	910016_0
670	187,70	910018_0
870	213,90	910010_0

	CODE
	A
	Q
	B



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 L80|60K

	CHF	CODE
	411,25	4165A4A_
	411,25	4165A4Q_
	411,25	4165A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x655 >80	2
3000K	2x675 >80	4

ALWAYS USE

pole with concrete fixation

	CHF	CODE
170	171,15	910073_0
270	187,70	910074_0
470	204,25	910076_0
670	223,60	910078_0
870	259,45	910070_0


	CODE
	A
	Q
	B

back



819




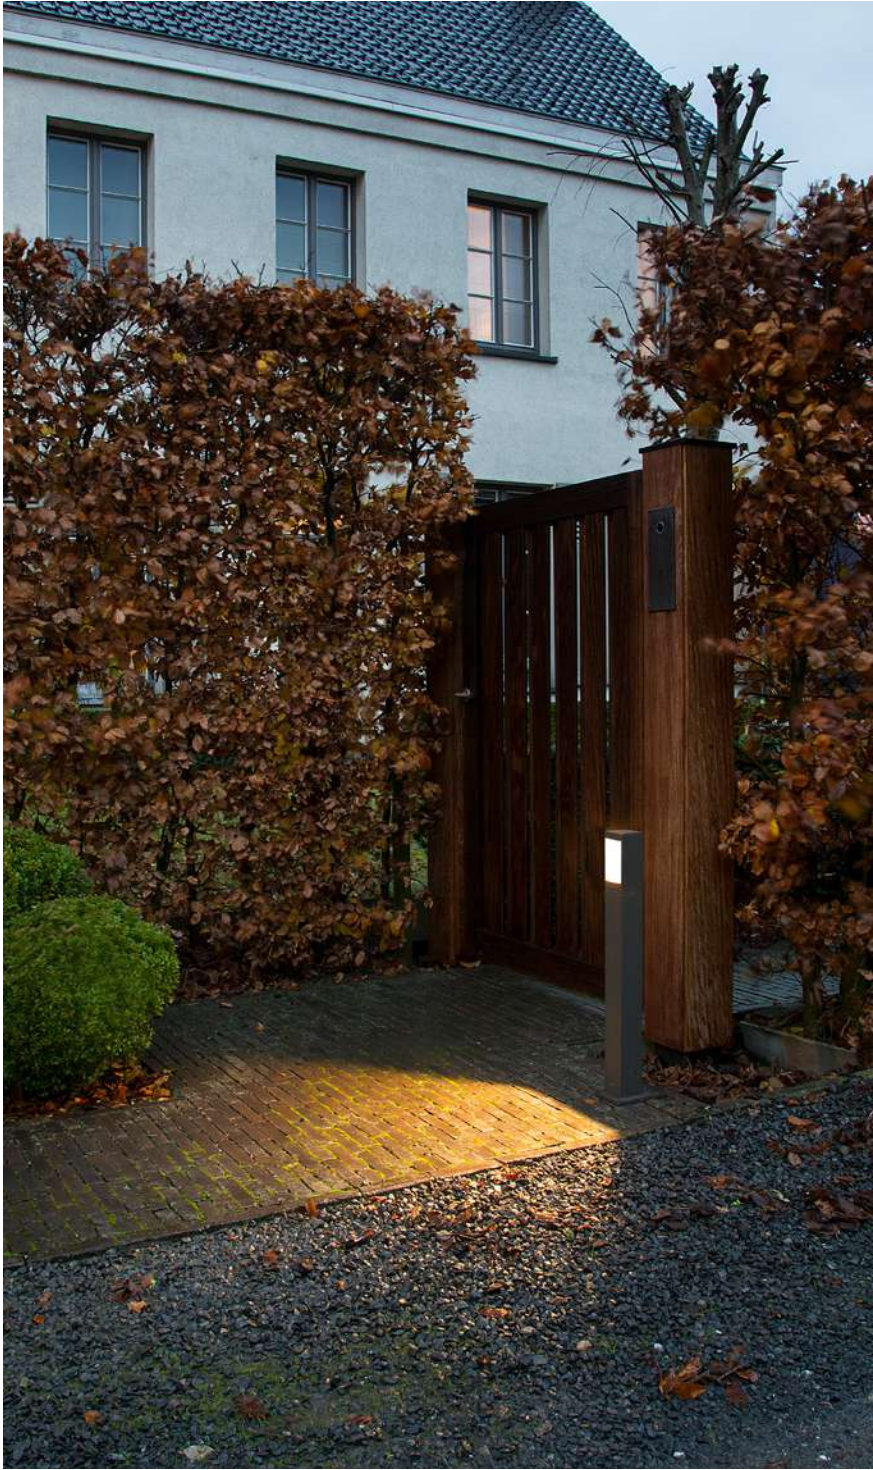

PRIVATE RESIDENCE BELGIUM

LINUS

Outdoor
Floor surface



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP65 L70|50K

	CHF	CODE
	233,25	726378D5
	233,25	726378A5
	233,25	726378Q5

ALWAYS USE


	CHF	CODE
150	114,55	910024_0
350	150,45	910026_0
550	191,85	910028_0

	CODE
	D
	A
	Q

OPTIONAL

	CHF	CODE
ground spike		
	85,60	90013103

	CHF	CODE
ground fixation		
	85,60	90013302

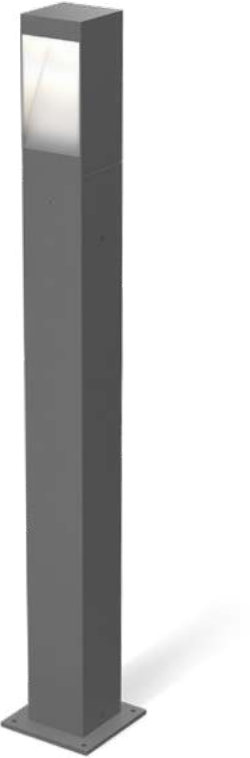

driver

ONE DRIVER IS ALL YOU NEED

Sie setzen Fassaden in Szene, beleuchten den Garten und machen Wege im Dunkeln sichtbar – moderne Outdoor-Leuchten sind echte Alleskönner. Mit dem 24V Plug & Play Connector System gelingt die Installation besonders leicht: Steckdose, passender Treiber und schon lassen sich mehrere Leuchten anschließen.

Elles mettent les façades en valeur, éclairent le jardin et rendent les allées visibles la nuit – les luminaires extérieurs modernes sont de véritables polyvalents. Avec le système 24V Plug & Play, l'installation est simple : une prise, un driver adapté et plusieurs luminaires se connectent facilement.




weverducre.com/24V-plugplay

1

CHOOSE YOUR
LUMINAIRES



GEO
page 885



REED
page 887



POLA
page 889

Two, three, four, or even more, the choice is yours! The number of lights and the sum of their individual wattages is the first thing you need to know to get started with your Plug & Play Connector System.

GOOD TO KNOW

24V Plug & Play Connector System recommends adding 2 or more luminaires to the driver.

2

DEFINE THE
DISTANCE
BETWEEN
DRIVER AND
LUMINAIRE



Adjacent or far away. The distance between the driver and the first light is very important as it determines the further options of your 24V Plug & Play Connector System lighting solution. You can find detailed information about your options at weverducre.com/24V-cable-length

GOOD TO KNOW

Each driver is supplied with two 2.5m cables, one for each side.

3



CHOOSE YOUR
DRIVER AND
SET UP YOUR
LUMINAIRES

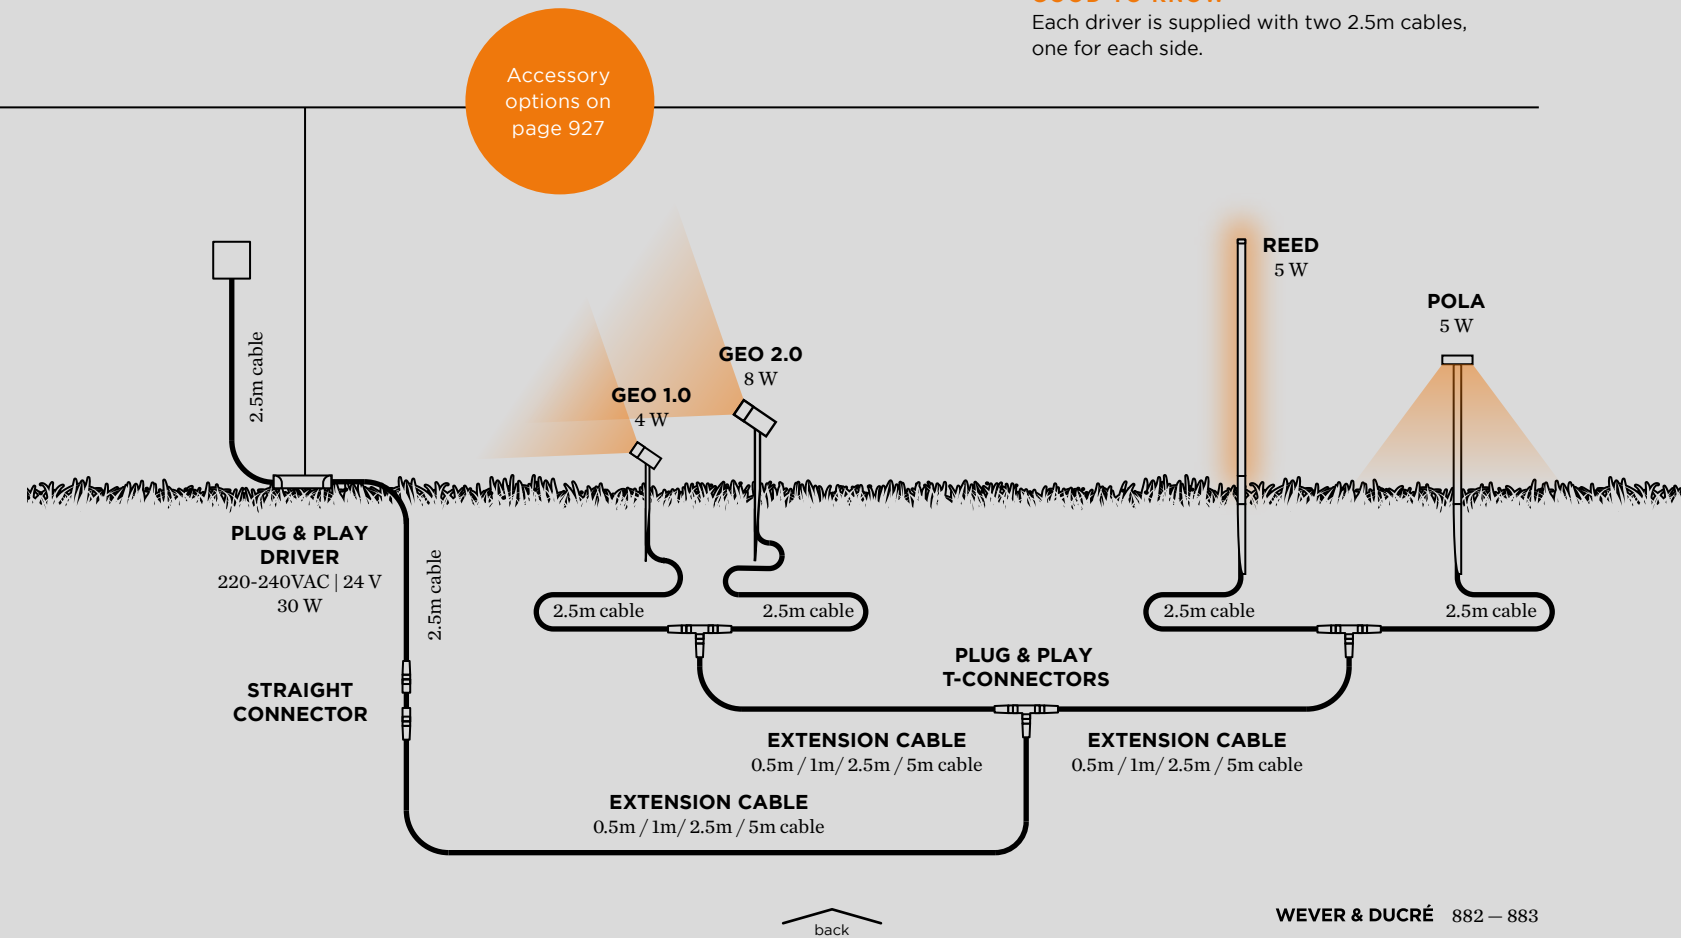



GEO

Outdoor
Floor surface



ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

CHF	CODE
13,15	90014504


Plug & Play t-connector IP67
3x 24V female connector

CHF	CODE
21,40	90014501

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	CHF	CODE
0.5m	22,10	90014505
1m	35,90	90014506
2.5m	52,45	90014502
5m	80,05	90014503



1.0

LED PCB 4W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-30° L80|50K


2700K | CRI >90 | 245lm

	CHF	CODE
	178,05	767562A3
	178,05	767562Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CHF	CODE
30W	136,65	90018014
75W	164,25	90018015



2.0

LED PCB 8W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-33° L80|50K


2700K | CRI >90 | 440lm

	CHF	CODE
	317,40	767662A3
	317,40	767662Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CHF	CODE
30W	136,65	90018014
75W	164,25	90018015



back





PRIVATE RESIDENCE AUSTRIA

REED

Outdoor
Floor surface



ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

CHF	CODE
13,15	90014504


Plug & Play t-connector IP67
3x 24V female connector

CHF	CODE
21,40	90014501

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	CHF	CODE
0.5m	22,10	90014505
1m	35,90	90014506
2.5m	52,45	90014502
5m	80,05	90014503



1.0

LED PCB 5W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K


2700K | CRI >90 | 330lm

	CHF	CODE
	196,00	770182A3
	196,00	770182Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CHF	CODE
30W	136,65	90018014
75W	164,25	90018015



2.0

LED PCB 6W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K

2700K | CRI >90 | 395lm



	CHF	CODE
	237,40	770282A3
	237,40	770282Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CHF	CODE
30W	136,65	90018014
75W	164,25	90018015



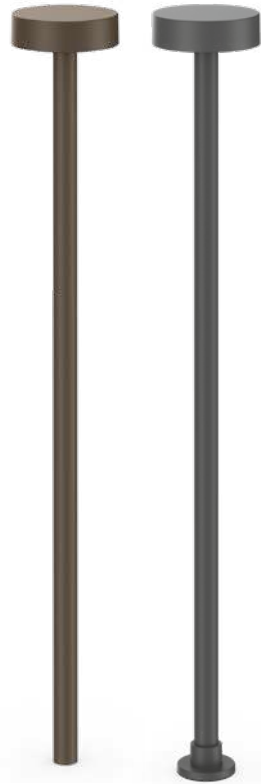

ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

CHF	CODE
13,15	90014504


Plug & Play t-connector IP67
3x 24V female connector

CHF	CODE
21,40	90014501

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	CHF	CODE
0.5m	22,10	90014505
1m	35,90	90014506
2.5m	52,45	90014502
5m	80,05	90014503



2.0

LED PCB 5W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K


2700K | CRI >90 | 250lm

	CHF	CODE
	273,25	7381A2A3
	273,25	7381A2Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CHF	CODE
30W	136,65	90018014
75W	164,25	90018015



2.1

LED PCB 5W | 24V | fixation plate
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K

2700K | CRI >90 | 250lm


	CHF	CODE
	270,50	7382A2A3
	270,50	7382A2Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CHF	CODE
30W	136,65	90018014
75W	164,25	90018015



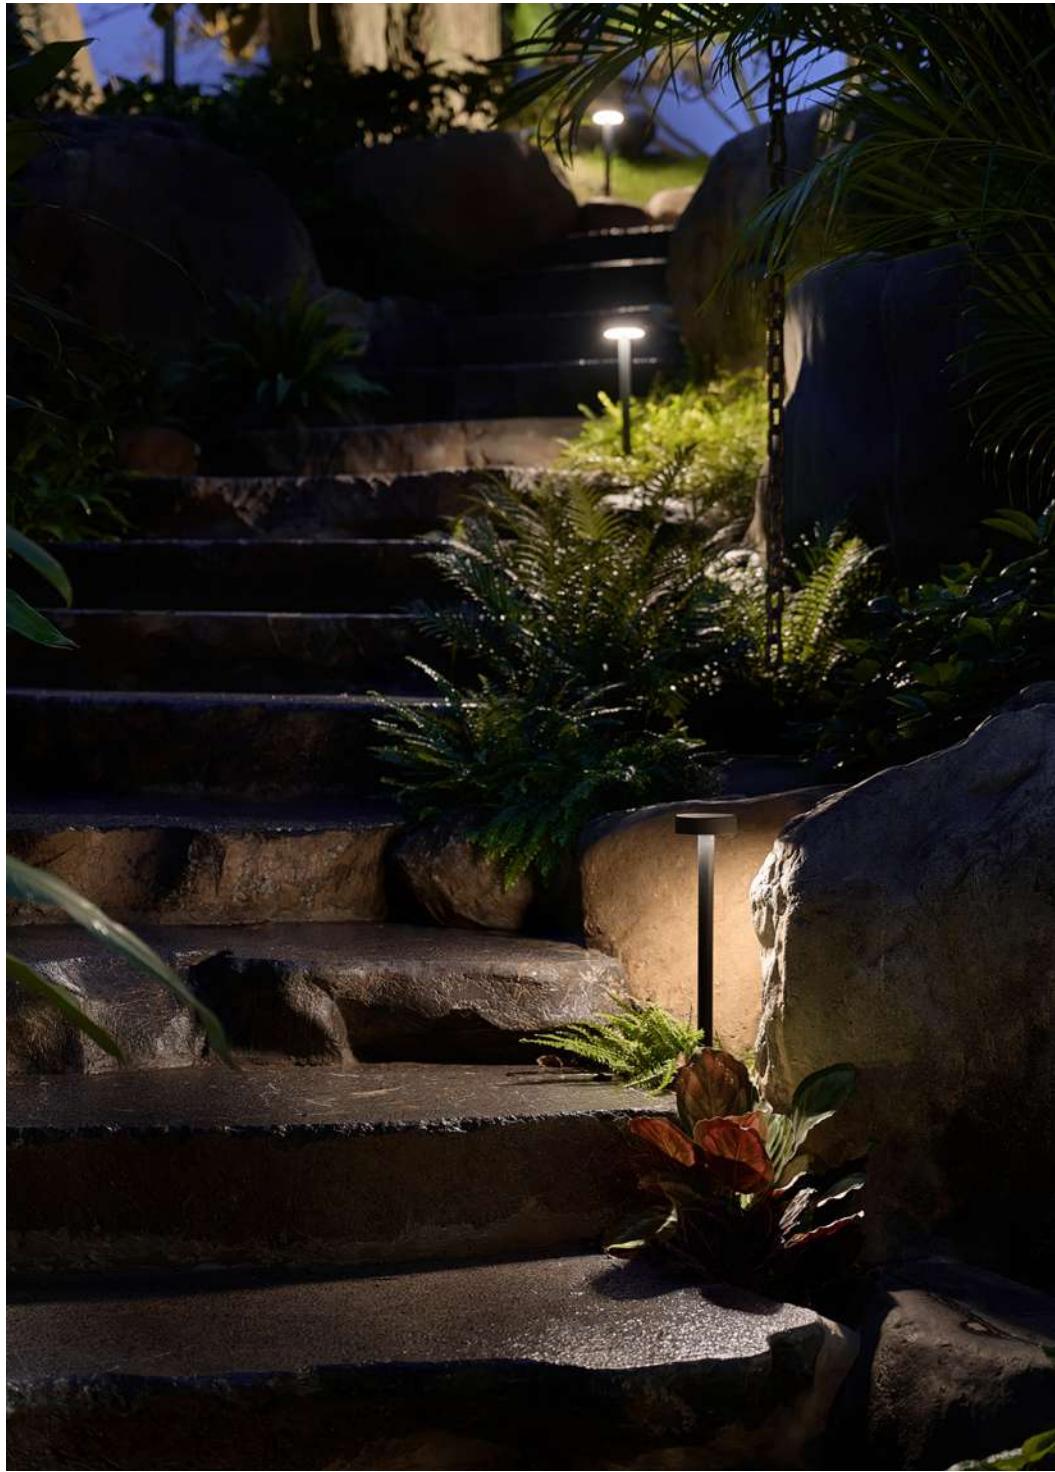


PRIVATE RESIDENCE | WORKLOUNGE 03- VIETNAM



access


sories



easy and fast installation with quick connectors pre assembled on our drivers and modules

DRIVER 180mA 7.5W DIM


7.5W | 180mA | 27-42V | phase-cut dim
220-240VAC | precabled 150mm wire
and quick connector to luminaire
50-60Hz
L/W/H 68x33x22
☐ IP20 **CE**



CHF	CODE
45,55	90226202

DRIVER 180mA 7.2W DALI


7.2W | 180mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz
L/W/H 166x29x21
☐ IP20 **CE**



CHF	CODE
89,05	90246301

DRIVER 250mA 5W DIM

5W | 250mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26
☐ IP20 **CE**



CHF	CODE
45,55	90226403W

DRIVER 250mA 5W DIM


5W | 250mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz
L/W/H 68x33x22
☐ IP20 **CE**



CHF	CODE
45,55	90226201

DRIVER 250mA 5W DIM


5W | 250mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz
L/W/H 68x33x22
☐ IP20 **CE**



CHF	CODE
1 pc. 56,60	90226201W
20 pcs. 905,30	90226201WM

DRIVER 250mA 10.5W DIM


10.5W | preset at 250mA | 26-42V
phase-cut dim | 220-240VAC
50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 **CE**



CHF	CODE
45,55	90226501

DRIVER 200mA 10W DIM


10W | 200mA | 30-42V | phase-cut dim
220-240VAC
50-60Hz | 10-100%
L/W/H 85x22x41
☐ IP20 **CE**



CHF	CODE
45,55	90226402

DRIVER 200mA 8W DALI


8W | 200mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz | 1-100%
L/W/H 166x29x21
☐ IP20 **CE**



CHF	CODE
89,05	90246302

DRIVER 250mA 10W DALI


10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | 50-60Hz
L/W/H 166x29x21
☐ IP20 **CE**



CHF	CODE
89,05	90246403

DRIVER 250mA 10W DALI

10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | wire through
50-60Hz
L/W/H 185x30x21
☐ IP20 **CE**





CHF	CODE
1 pc. 100,05	90246403W
20 pcs. 1600,80	90246403WM



DRIVER 350mA 3.5W

3.5W | 350mA | 2.7-10V
220-240VAC | 50-60Hz

L/W/H 65x29x18





CHF	CODE
46,95	90213102

DRIVER 350mA 6W

6W | 350mA | 8.6-18V
100-240VAC | precabled with quick
connector to luminaire | 50-60Hz

L/W/H 66x39x22





CHF	CODE
35,20	90213303

DRIVER 350mA 6W

6W | 350mA | 8.6-18V
100-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz

L/W/H 66x39x22



	CHF	CODE
1 pc.	46,25	90213303W
20 pcs.	739,70	90213303WM

DRIVER 350mA 7.7W

7.7W | 350mA | 3-22V
200-240VAC | 50-60Hz

L/W/H 68x35x21




CHF	CODE
48,30	90213202

DRIVER 350mA 7W DIM

7W | 350mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | wire through
50-60Hz

L/W/H 96x45x26




CHF	CODE
49,00	90223407W

DRIVER 350mA 7W DIM

7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz

L/W/H 68x33x22




CHF	CODE
46,25	90223301

DRIVER 350mA 7W DIM

7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz

L/W/H 68x33x22





	CHF	CODE
1 pc.	57,30	90223301W
20 pcs.	916,35	90223301WM

DRIVER 350mA 10W DIM

10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz

L/W/H 115x41x25





CHF	CODE
49,00	90223406

DRIVER 350mA 10W DIM

10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled 150mm wire
and quick connector to luminaire

3 pole wire through box | 50-60Hz

L/W/H 115x41x25




	CHF	CODE
1 pc.	60,05	90223406W
20 pcs.	960,50	90223406WM

DRIVER 350mA 10W DIM

10W | 350mA | 14-28V | 1-10V
phase-cut dim | 220-240VAC | 50-60Hz
10-100%

L/W/H 102x51x30





CHF	CODE
42,10	90223401

DRIVER 350mA 13W DIM

13W | 350mA | 26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 138x44x30




CHF	CODE
58,65	90223404

DRIVER 350mA 14.7W DIM

14.7W | 350mA | 26-42V | phase-cut dim
220-240VAC | 50-60Hz
10-100%

L/W/H 125x41x23




CHF	CODE
51,75	90223504

DRIVER 350mA 4.2W IP66

4.2W | 350mA | 3-12V
90-264VAC | 50-60Hz

L/W/H 38x29x23




CHF	CODE
48,30	90213101

DRIVER 350mA 17W IP68

17W | 350mA | 5-49V
220-240VAC | 50-60Hz

L/W/H 122x54x20




CHF	CODE
95,25	90213602

DRIVER 350mA 4.5W DIM IP44

4.5W | 350mA | 8-13V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%

L/W/H 38x30x20



CHF	CODE
45,55	90223101

DRIVER 350/500/700mA 17.5-20W

350/500/700mA output selection


17.5W | 350mA | 25-50V

20W | 500mA | 20-40V

20W | 700mA | 14-28.5V

220-240VAC | 50-60Hz

L/W/H 102x51x30



CHF	CODE
53,85	90218601

DRIVER 350/500/700mA 17-32W DIM

350/500/700mA | dipswitch selection

17W | 350mA | 2-47V



24W | 500mA | 2-47V

32W | 700mA | 2-46V

phase-cut dim | not for ambient dim

220-240VAC | 50-60Hz | push dim

L/W/H 166x46x34




CHF	CODE
85,60	90228801



DRIVER 500mA 6W


6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21



CHF	CODE
45,55	90214201

DRIVER 500mA 10W


10W | 500mA | 13-20V
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz
L/W/H 60x39x20



CHF	CODE
35,20	90214406

DRIVER 500mA 10W


10W | 500mA | 13-20V
220-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz
L/W/H 60x39x20



	CHF	CODE
1 pc.	46,25	90214406W
20 pcs.	739,70	90214406WM

DRIVER 500mA 6.5W DIM


6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23



CHF	CODE
35,20	90224301

DRIVER 500mA 10W DIM


10W | 500mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26



CHF	CODE
51,75	90224404W

DRIVER 500mA 10W DIM


10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz
L/W/H 115x41x25



CHF	CODE
51,75	90224403

DRIVER 500mA 10W DIM


10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz
L/W/H 115x41x25



	CHF	CODE
1 pc.	62,80	90224403W
20 pcs.	1004,65	90224403WM

DRIVER 500mA 19W DIM

19W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30



CHF	CODE
62,80	90224602

DRIVER 500mA 10W 1-10V DIM


10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 102x51x30



CHF	CODE
49,00	90234401

DRIVER 500mA 15W DALI


15W | 500mA | 10-31V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 166x29x21



CHF	CODE
89,05	90244501

DRIVER 500mA 15W DALI


15W | 500mA | 10-31V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 185x30x21



	CHF	CODE
1 pc.	100,05	90244501W
20 pcs.	1600,80	90244501WM

DRIVER 500mA 24W DALI


24W | preset at 500mA | 6-49V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to
luminaire | 50-60Hz | 1-100%
L/W/H 143x43x30



CHF	CODE
92,50	90244701

DRIVER 500mA 7W IP67


7W | 500mA | 5-14.5V
100-240VAC | 47-63Hz
L/W/H 57x41x24



CHF	CODE
64,20	90214301

DRIVER 500mA 24W IP68

24W | 500mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26



CHF	CODE
102,15	90214702



DRIVER 700mA 6W


6W | 700mA | 3-8.4V
230-240VAC | 50-60Hz
L/W/H 68x35x21
IP20 CE U



CHF	CODE
47,65	90215203

DRIVER 700mA 10W DIM


10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 CE



CHF	CODE
51,75	90225402

DRIVER 700mA 14W DIM


14W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 CE



CHF	CODE
53,85	90225502

DRIVER 700mA 20W DIM


20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20 CE



CHF	CODE
62,80	90225604

DRIVER 700mA 25W DIM

25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 145x51x30
IP20 CE



CHF	CODE
65,55	90225701

DRIVER 24V/15W


15W | 24V
220-240VAC | 50-60Hz
L/W/H 107x33x22
IP20 CE



CHF	CODE
53,85	90212501

DRIVER 24V/25W


2.4-25W | 24V | phase-cut dim | trailing edge only
220-240VAC | 50-60Hz
L/W/H 128x52x30
IP20 CE



CHF	CODE
63,50	90222701

DRIVER 24V/35W


35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
IP20 CE



CHF	CODE
58,00	90212801

DRIVER 24V/50W


12-50W | 24V | phase-cut dim | trailing edge only
220-240VAC | 50-60Hz
L/W/H 166x52x32
IP20 CE



CHF	CODE
93,85	90222901

DRIVER 24V/100W


100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20 CE



CHF	CODE
101,85	90212902

DRIVER 24V/100W DALI


100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20 CE



CHF	CODE
213,90	90242901

DRIVER 700mA 30W DIM


30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20 CE



CHF	CODE
65,55	90225702

DRIVER 700mA 28W DALI


28W | preset at 700mA | 6-40V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to luminaire | 50-60Hz | 1-100%
L/W/H 97x43x30
IP20 CE



CHF	CODE
92,50	90245704

DRIVER 700mA 7W IP67


7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.07kg CE U



CHF	CODE
50,40	90215301

DRIVER 24V/35W IP67


35W | 24V
100-277VAC | 50-60Hz
L/W/H 199x42x43
IP67 CE



CHF	CODE
67,65	90212802

DRIVER 24V/100W IP67

100W | 24V
100-277VAC | 50-60Hz
L/W/H 178x68x39
IP67 CE




CHF	CODE
199,55	90212903



WIRE THROUGH
CONNECTOR BOX


3 pole
L/W/H 105x58x30
☐ IP20 ⤴ min.66 Ⓢ Ⓡ



CHF	CODE
20,70	90059145

WIRE THROUGH
CONNECTOR BOX

3 pole + DALI
L/W/H 105x58x30
☐ IP20 ⤴ min.66 Ⓢ Ⓡ



CHF	CODE
24,15	90059146


WIRE THROUGH
CONNECTOR BOX

3 pole IP68 | quick IP connection box
with Gel included
L/W/H 90x43x20
☐ IP68 ⤴ min.48 Ⓢ Ⓡ

CHF	CODE
49,70	90059149

PAR16 FLAT HEAD


PAR16 | GU10
220-240VAC | 50-60Hz
IP20 Ⓢ



CHF	CODE
11,05	90059125

CONNECTION BOX 3P
PAR16

incl. strain relief | 3 pole push
connector | incl. PAR16 socket
incl. through-wiring
L/W/H 75x35x25




CHF	CODE
16,60	90059126

DALI TO PHASE-CUT
DIMMING MODULE

for converting a DALI signal to
phase-cut dim | for max. 20 devices
LED | 10-300W | 230V
L/W/H 120x30x22
☐ IP20 Ⓢ

DIMMER DIN RAIL

max. 200W LED | 230V
phase-cut dim
L/W/H 17x55x90
IP30 Ⓢ




CHF	CODE
309,15	90270901

CHF	CODE
218,05	90019018

DIMMER FOR SWITCH

max. 200W LED | 230V
phase-cut dim
L/W/H 48x18x46
IP30 Ⓢ



CHF	CODE
171,15	90019017

LED MODULES | LED LAMPS

Accessories

LED MODULE HO

12W | 350mA | 35Vf
1800-3000K | CRI >90 | 1050lm
compatibility on request
IP20 CE M-26°



	CHF	CODE
	104,90	905251W9
	104,90	905251B9

LED MODULE HO 2700K

12W | 350mA | 35Vf
2700K | CRI >90 | 1340lm
compatibility on request
IP20 CE M-26°



	CHF	CODE
	104,90	905251W3
	104,90	905251B3

LED MODULE HO 3000K

12W | 350mA | 35Vf
3000K | CRI >90 | 1410lm
compatibility on request
IP20 CE M-26°



	CHF	CODE
	104,90	905251W5
	104,90	905251B5

LED MODULE HO 4000K


12W | 350mA | 35Vf
4000K | CRI >90 | 1420lm
compatibility on request
IP20 CE M-26°



	CHF	CODE
	104,90	905251W7
	104,90	905251B7

LED MODULE CABLE

extension cable between LED module
and driver



	CHF	CODE
1m	7,60	90019200
2m	9,00	90019201
3m	10,35	90019202

PAR16 LED 2700K

6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 445lm
IP20 CE M-35°



	CHF	CODE
	22,80	901228W3
	22,80	901228B3

PAR16 LED 2700K

3.7W | GU10
220-240VAC | 50-60Hz
2700K | CRI >80 | 350lm
IP20 CE M-36°



	CHF	CODE
	17,95	905227S2

PAR16 LED 3000K

6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 465lm
IP20 CE M-35°



	CHF	CODE
	22,80	901228W5
	22,80	901228B5

PAR16 LED 3000K

3.7W | GU10
220-240VAC | 50-60Hz
3000K | CRI >80 | 350lm
IP20 CE M-36°



	CHF	CODE
	17,95	905227S4

PAR11 LED 2700K

4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 240lm
IP20 CE W-50°



	CHF	CODE
	20,05	901128W3
	20,05	901128B3

PAR11 LED 3000K

4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 255lm
IP20 CE W-50°



	CHF	CODE
	20,05	901128W5
	20,05	901128B5

PAR16 LED HE 2700K

5W | GU10 | 106 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 530lm
IP20 CE M-35°



	CHF	CODE
	26,95	907228W3
	26,95	907228B3

PAR16 LED HE 3000K

5W | GU10 | 107 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 535lm
IP20 CE M-35°



	CHF	CODE
	26,95	907228W5
	26,95	907228B5

METAL SPRING CLIP

alternative front lamp fixation spring
for ø 50 lamp rings
LED | PAR16 | max. 12W
DEEP ADJUST | DEEP 2.0
PLANO | STRANGE ceiling
SOLID



	CHF	CODE
	2,80	90019700


SPRING CLIP

lamp fixation | push-in system
for ø 50 lamp rings
LED | PAR16 | max. 12W
DEEP ADJUST | DEEP 2.0
PLANO | STRANGE ceiling
SOLID

	CHF	CODE
	2,80	900198W0
	2,80	900198S0
	2,80	900198G0
	2,80	900198M0
	2,80	900198Q0
	2,80	900198B0


QT14 LED 3000K

3W | G9
220-240VAC | 50-60Hz
3000K | CRI >80 | 300lm
IP20 

		
	ø17 54	
	CHF	COD
clear	20,05	9019G703

QT14 LED 2700K

3.5W | G9
220-240VAC | 50-60Hz
2700K | CRI >90 | 340lm
IP20 

		
		
	CHF	CODE
opal	24,85	9010G803

QT14 LED 3000K

3.5W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | CRI >90 | 350lm
IP20 

		
		
		ø19
		49
	CHF	COD
opal	24,85	9010G80

C35 LED 2700K

5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | CRI >90 | 450lm
IP20 

		
		
	CHF	COD
opal	14,50	9003C10

T25-85 LED 2200K

5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 460lm
IP20 

		
		
	CHF	CODE
gold tinted	40,05	9003C108

T25-85 LED 2500K

5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2500K | CRI >90 | 480lm
IP20 0.02kg 

			
			
		CHF	CODE
gold tinted	40,05		9003C107

T25-85 LED 2700K

5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 500lm
IP20 

			
			
		CHF	CODE
gold tinted	40.05		9003C106


T30-225 LED 2200K

5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 380lm
IP20 

		
		
	CHF	CODE
gold tinted	53,85	9003E129


T30-225 LED 2700K

5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 425lm
IP20 

		
	CHF	CODE
gold tinted	53,85	9003E136

T30-300 LED 2200K

7.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 585lm
IP20 

		
		
	CHF	CODE
gold tinted	59,35	9003E130

T30-300 LED 2700K

7.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 610lm
IP20 


		
		
	CHF	CODE
gold tinted	59,35	9003E135

LED MODULES | LED LAMPS

Accessories

A60 LED 2700K DIM

5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 480lm
IP20



	CHF	CODE
clear	42,80	9003E138

A60 LED 2700K


9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 800lm
IP20



	CHF	CODE
opal	20,05	9003E152

A65 LED 2700K


14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1375lm
IP20



	CHF	CODE
opal	30,40	9003E153

A60 LED 2200K


3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 245lm
IP20



	CHF	CODE
gold tinted	42,80	9003E109

A60 LED 2700K


5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 405lm
IP20



	CHF	CODE
gold mirror	44,20	9003E139
silver mirror	44,20	9003E140

G95 LED 2700K


4.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 375lm
IP20



	CHF	CODE
clear	45,55	9003E160

G95 LED 2700K


11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1100lm
IP20



	CHF	CODE
opal	40,05	9003E154

G95 LED 2700K

10W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1060lm
ceramic soft look
IP20



	CHF	CODE
opal	45,55	9003E163

G95 LED 2200K


5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 380lm
IP20



	CHF	CODE
gold tinted	45,55	9003E111

G95 LED 2200K


5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 370lm
IP20



	CHF	CODE
gold mirror	48,30	9003E156

G95 LED 2700K


5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 395/410lm
IP20



	CHF	CODE
gold mirror	48,30	9003E142
silver mirror	48,30	9003E157

G125 LED 2200K



6.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 450lm
IP20



	CHF	CODE
gold tinted	46,95	9003E112

ACCESSORIES

Accessories

		REPLACEMENT PLUG for Switzerland Liechtenstein		REPLACEMENT PLUG for UK Ireland Malta Arabic peninsula	
					
		CHF	CODE	CHF	CODE
			30,40 90019211		30,40 90019212

HONEYCOMB LOUVER

BLIEK PETIT | CENO | LECA
PIRRO | QITO

LIKO 1.0 HONEYCOMB LOUVER

LIKO 2.0 HONEYCOMB LOUVER

LIKO 3.0 HONEYCOMB LOUVER

							
ø29		ø29		ø41		ø47	
		CHF	CODE	CHF	CODE	CHF	CODE
		20,05	915230B0		20,05 915231B0		22,10 915232B0
							24,15 915233B0

ODREY

inner cover for 1.6

			
ø55			
		CHF	CODE
		40,05	911420W0
		40,05	911420G0
		40,05	911420B0

FINLIN COVER PLATE ADAPTER




for concrete housings

FINLIN

wall/base spacer for overlapping
luminaires

FINLIN ROUND

wall/base spacer for overlapping
luminaires

					
		CHF	CODE	CHF	CODE
		17,25	900194B0		42,80 900195B0
					42,80 900196B0

BOX | RAY




flaps for adjustable beam angle
white | for BOX/RAY QT14 only

X-BEAM

snoot

X-BEAM

snoot round


					
		CHF	CODE	CHF	CODE
		53,85	900401W0		48,30 90019023
					48,30 90019031

PLASTERKITS

Accessories

DEEP ADJUST PETIT
TRIMLESS | BLIEK PETIT
TRIMLESS | QITO TRIMLESS


aluminium plasterkit
⌚ 78-80 ⚙️ 12.5, 15, 20, 25



CHF	CODE
30,40	90017210

DEEP ADJUST TRIMLESS
aluminium plasterkit


⌚ 105-110 ⚙️ 12.5, 15, 20, 25



CHF	CODE
35,90	90017209

STRANGE PETIT
TRIMLESS 1.0


aluminium plasterkit
📏 64x64 ⚙️ 7-32



CHF	CODE
51,10	90017202

STRANGE PETIT
TRIMLESS 2.0


aluminium plasterkit
📏 64x117 ⚙️ 7-32



CHF	CODE
53,85	90017205

STRANGE PETIT
TRIMLESS 3.0


aluminium plasterkit
📏 64x169 ⚙️ 7-32



CHF	CODE
59,35	90017208

STRANGE TRIMLESS 1.0
SNEAK TRIMLESS 1.0


aluminium plasterkit
📏 86x86 ⚙️ 7-32



CHF	CODE
56,60	90017120

STRANGE TRIMLESS 2.0
SNEAK TRIMLESS 2.0

aluminium plasterkit
📏 156x86 ⚙️ 7-32



CHF	CODE
62,10	90017121

LITO
plasterkit




CHF	CODE
22,80	90017119

PLASTERKITS


Accessories

PLANO 1.0
plasterkit




CHF	CODE
26,25	90017104

PLANO 2.0
plasterkit




CHF	CODE
36,60	90017105

STRIPE 0.4 | 0.7
recessed housing incl. plasterkit
19x75 11.65




CHF	CODE
33,15	90012037

STRIPE 2.2
recessed housing incl. plasterkit
25x76 11.65




CHF	CODE
59,35	90012038

ORIS 0.7 | RETO 2.0
recessed housing incl. plasterkit
19x58 11.75




CHF	CODE
62,10	90012039

ORIS 0.8 | RETO 0.8
recessed housing incl. plasterkit
70x70 11.80




CHF	CODE
63,50	90012047

ORIS 1.3 | RETO 1.3
recessed housing incl. plasterkit
122x122 11.75




CHF	CODE
71,80	90012041

ORIS 2.0
recessed housing incl. plasterkit
123x191 11.75



CHF	CODE
80,05	90012043

ORIS 0.7 | RETO 2.0
concrete housing
192x58 11.60




CHF	CODE
52,45	90012044

ORIS 0.8 | RETO 0.8
concrete housing
70x70 11.65




CHF	CODE
44,20	90012046

ORIS 1.3 | RETO 1.3
concrete housing
122x122 11.60



CHF	CODE
53,85	90012040

ORIS 2.0
concrete housing
123x191 11.60




CHF	CODE
58,00	90012042

LITO
always use in combination with
plasterkit
122x90 11.45




CHF	CODE
36,60	90012027

MAP 0.6 | CHART 0.6
BLINK | TRIMLESS
ground housing
137 11.10




CHF	CODE
34,50	90012201

MAP 0.9 | CHART 0.9
ground housing
137 11.30




CHF	CODE
46,95	90012202

MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART
ASYM 1.2
ground housing
190 11.58



CHF	CODE
64,90	90012203

MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART
ASYM 1.6
ground housing
220 11.84




CHF	CODE
84,20	90012204

FLYRA SYSTEM | ILANE

Accessories


FLYRA SINGLE/MULTI BASE

max. 25W | const. volt. | 24V
phase-cut dim | W/H ø62x102
polycarbonate




FLYRA MULTI BASE

max. 50W | const. volt. | 24V
phase-cut dim | W/H ø200x38
polycarbonate




FLYRA CABLE CONNECTOR

cable from one luminaire to another
incl. plugs




FLYRA FIX CONNECTOR

electrical | mechanical | straight
central suspension




STREX DRIVER 48V/100W

100W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20 CE




STREX DRIVER 48V/150W

150W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20 CE




STREX DRIVER 48V/250W

250W | 48V
220-240VAC | 50-60Hz
L/W/H 400x40x22
IP20 CE




STREX DALI SELV DEVICE

for 48V system | max. 300W | 48VDC
L/W/H 212x37x26




ILANE BLACK DIFFUSER

only for 1.0




ILANE BLACK DIFFUSER

only for 3.0




RECESSED

track | custom cuts | 48V | 15A | DALI




SURFACE

track | custom cuts | 48V | 15A | DALI




SUSPENDED

track | custom cuts | 48V | 15A | DALI




SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI
3000K | CRI >90 | 14W/m | 950lm/m
with indirect light




ILANE MINI CONNECTOR

strip to strip - continuous




ILANE MINI CONNECTOR

strip to wire



ILANE MINI CONNECTOR

strip to strip



	CHF	CODE
< 1m	178,05	904111W0CC
< 1m	178,05	904111B0CC
< 2m	343,65	904112W0CC
< 2m	343,65	904112B0CC
< 3m	500,95	904113W0CC
< 3m	500,95	904113B0CC

CC = for lengths specifications please
add four digits in mm

	CHF	CODE
< 1m	142,15	904211W0CC
< 1m	142,15	904211B0CC
< 2m	259,45	904212W0CC
< 2m	306,40	904212L0CC
< 2m	306,40	904212M0CC
< 2m	306,40	904212Q0CC
< 2m	259,45	904212B0CC

< 3m	375,40	904213W0CC
< 3m	445,75	904213L0CC
< 3m	445,75	904213M0CC
< 3m	445,75	904213Q0CC
< 3m	375,40	904213B0CC

CC = for lengths specifications please
add four digits in mm

	CHF	CODE
< 1m	142,15	904211W0CC
< 1m	142,15	904211B0CC
< 2m	259,45	904212W0CC
< 2m	306,40	904212L0CC
< 2m	306,40	904212M0CC
< 2m	306,40	904212Q0CC
< 2m	259,45	904212B0CC

< 3m	375,40	904213W0CC
< 3m	445,75	904213L0CC
< 3m	445,75	904213M0CC
< 3m	445,75	904213Q0CC
< 3m	375,40	904213B0CC

CC = for lengths specifications please
add four digits in mm

	CHF	CODE
< 2m	821,10	904512W5CC
< 2m	821,10	904512B5CC
< 3m	959,10	904513W5CC
< 3m	959,10	904513B5CC

CC = for lengths specifications please
add four digits in mm

1-PHASE TRACK

Accessories

TRACK ADAPTER 1.0 HV


no space for driver | cable diameter
max. 10mm | for suspended
luminaires without steel wire
incl. strain relief
max. weight 10kg



	CHF	CODE
	20,70	90014044
	20,70	90014043

TRACK ADAPTER 2.0 HV


no space for driver | cable diameter
max. 5mm | for suspended
luminaires without steel wire
incl. strain relief
max. weight 3kg



	CHF	CODE
	22,10	90014277
	22,10	90014278

CUTTING TOOL

for cutting the inner copper cables of
3-phase track and 48V track
CE TÜV



	CHF	CODE
	154,60	90014165

TRACK ADAPTER HV


no space for driver | cable diameter
max. 6.6mm | for suspended
luminaires without steel wire
incl. strain relief
max. weight 5kg



	CHF	CODE
	22,10	90014279
	22,10	90014280

TRACK ADAPTER LV


DALI-2 | 350mA | incl. driver



	CHF	CODE
	124,20	914174W0
	124,20	914174B0


OPLIA TRACK ADAPTER LV

DALI-2 | 250mA | incl. driver



	CHF	CODE
	124,20	914172W0
	124,20	914172B0


ADJUSTABLE CORNER



	CHF	CODE
	52,45	90014042
	52,45	90014041

COVERPLATE I/L/T/X

only use with recessed tracks



	CHF	CODE
	11,05	90014126
	11,05	90014127


COVERPLATE END FEEDS

only use with recessed tracks



	CHF	CODE
	13,15	90014124
	13,15	90014125

X-FEED



	CHF	CODE
	67,65	90014049
	67,65	90014050

POWER OUTLET

10A | 220-250V | 50-60Hz
Schuko adapter
PC UL94V0 + copper 50N
L/W/H 85x54x103
IP20 CE




	CHF	CODE
	52,45	90014254
	52,45	90014253

HOOK

max. weight 5kg


	CHF	CODE
	12,45	90014284
	12,45	90014285

FLEXIBLE CONNECTOR



	CHF	CODE
	102,15	90014288
	102,15	90014289


X-FEED



	CHF	CODE
	131,10	90014248
	131,10	90014249

T-FEED 1.0


top view



	CHF	CODE
	60,75	90014010
	60,75	90014011

T-FEED 2.0


top view



	CHF	CODE
	60,75	90014012
	60,75	90014013

T-FEED 3.0


top view



	CHF	CODE
	60,75	90014014
	60,75	90014015

T-FEED 4.0


top view



	CHF	CODE
	60,75	90014016
	60,75	90014017

T-FEED 1.0


top view



	CHF	CODE
	104,90	90014228
	104,90	90014229

T-FEED 2.0


top view



	CHF	CODE
	104,90	90014230
	104,90	90014231

T-FEED 3.0


top view



	CHF	CODE
	104,90	90014232
	104,90	90014233

T-FEED 4.0

top view



	CHF	CODE
	104,90	90014234
	104,90	90014235




back

SUSPENSION OPTIONS

Accessories

STRAIN RELIEF


for suspended luminaire power cable
fixation in base



CHF	CODE
3,90	90052064

CABLE WALL/CEILING BRACKET


for cable 4.25-5.5mm diameter



CHF	CODE
15,90	90019197
15,90	90019198

SINGLE BASE LV


DALI-2 | 350mA | incl. driver



CHF	CODE
151,80	914117W0
151,80	914117B0

OPLIA SINGLE BASE LV


DALI-2 | 250mA | incl. driver



CHF	CODE
151,80	914116W0
151,80	914116B0

MULTI CHANDELIER LV


3 luminaires | 3x175mA
phase-cut dim | incl. driver
always use with hooks



CHF	CODE
358,80	914161WW0
414,00	914161BL0
358,80	914161BM0
358,80	914161BQ0
358,80	914161BB0

MULTI CHANDELIER LV


6 luminaires | 6x175mA
phase-cut dim | incl. driver
always use with hooks



CHF	CODE
407,10	914162WW0
462,30	914162BL0
407,10	914162BM0
407,10	914162BQ0
407,10	914162BB0

MULTI CHANDELIER LV


9 luminaires | 9x175mA
phase-cut dim | incl. driver
always use with hooks



CHF	CODE
455,40	914163WW0
510,60	914163BL0
455,40	914163BM0
455,40	914163BQ0
455,40	914163BB0

MULTI CHANDELIER HV


1-9 luminaires | always use with hooks



CHF	CODE
324,30	914160WW0
379,50	914160BL0
324,30	914160BM0
324,30	914160BQ0
324,30	914160BB0

HOOK


always use for MULTI CHANDELIER



CHF	CODE
26,25	90052083
26,25	90052084

HOOK


for cable 4.25-5.5mm diameter | for
single and multi suspension | also for
textile cable



CHF	CODE
24,85	90052079
24,85	90052080

HOOK


standard multi suspension hook
for ø5 plugs



CHF	CODE
6,25	90052025
6,25	90052024

HOOK


optional multi suspension hook
for ø6 plugs



CHF	CODE
6,65	90052066
6,65	90052065

WIRO


cable wall bracket
only for WIRO textile cable



CHF	CODE
27,60	90052062

WIRO CABLE PLUG & PLAY


E27 LED 4-25W | connector set for
one shade | black textile cable | incl.
cable plug with dimmer | 2 cable
brackets included



CHF	CODE
231,85	90015165

WIRO DECENTER SET 1.0


A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included



	CHF	CODE
2.6m	149,05	90052050
6m	162,85	90052051

WIRO DECENTER SET 2.0


2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included



	CHF	CODE
2.6m	273,25	90052055
6m	314,65	90052056

WIRO DECENTER SET 3.0


3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included



	CHF	CODE
2.6m	394,70	90052060
6m	463,70	90052063

WIRO DECENTER SET 4.0


4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included



	CHF	CODE
2.6m	507,85	90052067
6m	576,85	90052078

KUJO BASE


replacement for 1.0, 2.0 for central
steel wire mounting



CHF	CODE
338,10	914215W0
338,10	914215SG0
338,10	914215M0
338,10	914215Q0
338,10	914215B0

KUJO CONNECTORS


cable from one luminaire to another
incl. plugs | only for 2.1, 3.2, 3.2.1



	CHF	CODE
	0.3m 20,05	915210W0
	0.3m 20,05	915210SG0
	0.3m 20,05	915210B0
	0.6m 26,25	915211W0
	0.6m 26,25	915211SG0
	0.6m 26,25	915211B0

KUJO CONNECTORS

cable from one luminaire to another
incl. plugs | only for 2.1, 3.2, 3.2.1




	CHF	CODE
	0.9m 31,75	915212W0
	0.9m 31,75	915212SG0
	0.9m 31,75	915212B0
	1.2m 37,30	915213W0
	1.2m 37,30	915213SG0
	1.2m 37,30	915213B0

POLE | GROUND FIXATION

Accessories

KIOSK POLE 400


straight pole | incl. ground spike



	CHF	CODE
	157,35	910101A0
	157,35	910101Q0

KIOSK POLE 600


straight pole | incl. ground spike



	CHF	CODE
	172,50	910102A0
	172,50	910102Q0

KIOSK POLE 800


straight pole | incl. ground spike



	CHF	CODE
	190,45	910103A0
	190,45	910103Q0

SWAM POLE 400


straight pole | incl. ground spike



	CHF	CODE
	142,15	910090Q0
	142,15	910090B0

SWAM POLE 600


straight pole | incl. ground spike



	CHF	CODE
	158,70	910091Q0
	158,70	910091B0

SWAM POLE 800


straight pole | incl. ground spike



	CHF	CODE
	176,65	910092Q0
	176,65	910092B0

SWAM POLE 400


curved pole | incl. ground spike



	CHF	CODE
	196,00	910093Q0
	196,00	910093B0

SWAM POLE 600


curved pole | incl. ground spike



	CHF	CODE
	198,75	910094Q0
	198,75	910094B0

SWAM POLE 800

curved pole | incl. ground spike



	CHF	CODE
	213,90	910095Q0
	213,90	910095B0

KIOSK | SWAM

fixation plate



	CHF	CODE
	30,40	90019019

STIPO POLE 200


with fixation plate | 3.0, 4.0



	CHF	CODE
	46,95	910062A0
	46,95	910062Q0

STIPO POLE 400


with fixation plate | 3.0, 4.0



	CHF	CODE
	52,45	910064A0
	52,45	910064Q0

STIPO POLE 600


with fixation plate | 3.0, 4.0



	CHF	CODE
	56,60	910066A0
	56,60	910066Q0

STIPO


ground spike



	CHF	CODE
	37,30	90013106

X-BEAM

ground spike



	CHF	CODE
	40,05	90013115

POLE | GROUND FIXATION

Accessories

GATE ROUND 1.0 POLE 250
pole with fixation plate



	CHF	CODE
	80,05	910121A0
	80,05	910121Q0

GATE ROUND 1.0 POLE 450
pole with fixation plate



	CHF	CODE
	95,25	910122A0
	95,25	910122Q0

GATE ROUND 1.0 POLE 650
pole with fixation plate



	CHF	CODE
	121,45	910123A0
	121,45	910123Q0

GATE ROUND 2.0 POLE 250
pole with fixation plate



	CHF	CODE
	80,05	910124A0
	80,05	910124Q0

GATE ROUND 2.0 POLE 450
pole with fixation plate



	CHF	CODE
	95,25	910125A0
	95,25	910125Q0

GATE ROUND 2.0 POLE 650
pole with fixation plate




	CHF	CODE
	121,45	910126A0
	121,45	910126Q0

GATE CARRÉ 1.0 POLE 250
pole with fixation plate




	CHF	CODE
	91,10	910111A0
	91,10	910111Q0

GATE CARRÉ 1.0 POLE 450
pole with fixation plate



	CHF	CODE
	106,30	910112A0
	106,30	910112Q0

GATE CARRÉ 1.0 POLE 650
pole with fixation plate



	CHF	CODE
	132,50	910113A0
	132,50	910113Q0

GATE CARRÉ 2.0 POLE 250
pole with fixation plate




	CHF	CODE
	91,10	910114A0
	91,10	910114Q0

GATE CARRÉ 2.0 POLE 450
pole with fixation plate




	CHF	CODE
	106,30	910115A0
	106,30	910115Q0

GATE CARRÉ 2.0 POLE 650
pole with fixation plate




	CHF	CODE
	132,50	910116A0
	132,50	910116Q0

POLE 270
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	149,05	910014A0
	149,05	910014Q0
	149,05	910014B0

POLE 270
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	187,70	910074A0
	187,70	910074Q0
	187,70	910074B0

POLE 670
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	187,70	910018A0
	187,70	910018Q0
	187,70	910018B0

POLE 670
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	223,60	910078A0
	223,60	910078Q0
	223,60	910078B0

POLE 170
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	135,25	910013A0
	135,25	910013Q0
	135,25	910013B0

POLE 170
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	171,15	910073A0
	171,15	910073Q0
	171,15	910073B0

POLE 470
with fixation plate
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	169,75	910016A0
	169,75	910016Q0
	169,75	910016B0

POLE 470
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




	CHF	CODE
	204,25	910076A0
	204,25	910076Q0
	204,25	910076B0

POLE 870
with fixation plate
PALOS ROUND | PALOS CARRÉ



	CHF	CODE
	213,90	910010A0
	213,90	910010Q0
	213,90	910010B0

POLE 870
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ



	CHF	CODE
	259,45	910070A0
	259,45	910070Q0
	259,45	910070B0


POLE | GROUND FIXATION

Accessories

GEO | REED | POLA


Accessories

LINUS POLE 150
with fixation plate




	CHF	CODE
	114,55	910024D0
	114,55	910024A0
	114,55	910024Q0

LINUS POLE 350
with fixation plate




	CHF	CODE
	150,45	910026D0
	150,45	910026A0
	150,45	910026Q0

LINUS POLE 550
with fixation plate




	CHF	CODE
	191,85	910028D0
	191,85	910028A0
	191,85	910028Q0

LINUS
ground spike



	CHF	CODE
	85,60	90013103


LINUS
concrete ground fixation



	CHF	CODE
	85,60	90013302

PLUG & PLAY
DRIVER 24V/30W IP67


30W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 110x48x31
IP67 CE



	CHF	CODE
	136,65	90018014

PLUG & PLAY
DRIVER 24V/75W IP67


75W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 129x49x32
IP67 CE



	CHF	CODE
	164,25	90018015

PLUG & PLAY
EXTENSION CABLE


2x 24V male plug
IP67 H07RN-F CE



	CHF	CODE
0.5m	22,10	90014505
1m	35,90	90014506
2.5m	52,45	90014502
5m	80,05	90014503

PLUG & PLAY
STRAIGHT CONNECTOR


2x 24V female connector
IP67 H07RN-F CE



	CHF	CODE
	13,15	90014504

PLUG & PLAY
T-CONNECTOR

3x 24V female connector
incl. 2 optional caps
IP67 CE



	CHF	CODE
	21,40	90014501

icons standards

NO MORE MISUNDERSTANDINGS

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrément	Profundidad de empotramiento	Profondità dell'incasso
	Ceiling Thickness	Deckenstärke	Plafonddikte	Épaisseur du plafond	Espesar del techo	Spessore del soffitto
	Rotatable vertically horizontally	Drehbar vertikal horizontal	Draaibaar verticaal horizontaal	Orientable verticalement horizontalement	Orientable en vertical horizontal	Orientabile in verticale orizzontale
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Fascio luminoso
	narrow – medium – wide beamangle	engstrahlend - medium-strahlend - breitstrahlend	smal - medium - breed	étroit - moyen - large	estecho - medio - ancho	stretto - medio - largo
	Class 1 Fixture	Leuchte der Schutzklasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1
	Class 2 Fixture	Leuchte der Schutzklasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2
	Class 3 Fixture	Leuchte der Schutzklasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3
	IP rating	IP Bewertung	IP-classificatie	Indice de protection	Grado IP	Grado di protezione IP
	Frontal IP rating	Frontale IP Bewertung	IP-classificatie	Évaluation IP frontale	Grado IP en parte frontal	Grado di protezione IP frontale
	IK rating	Schlagfestigkeit	IK-classificatie	IK rating	Grado IK	IK rating
	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Adatta per ambienti di lavoro uffici
	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie: kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante
	LED Lifetime: Lumen output is minimum 80% after 50.000 hours	LED-Lebensdauer: Die Lichtausbeute nach 50.000 Stunden beträgt mindestens 80 %	Led-levensduur: de lichtopbrengst na 50.000 branduren is minimaal 80%	Durée de vie des LED : l'efficacité lumineuse au bout de 50 000 heures s'élève à 80 % minimum	Vida útil de los LED: la eficiencia luminosa tras 50.000 horas es de al menos el 80 %	Durata dei LED: l'efficienza luminosa è pari ad almeno l'80% dopo 50.000 ore di funzionamento

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL
	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Temperatura colore
	Part not included	Teil nicht inkludiert	Onderdeel niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso
	Up/Down	Aufwärts/abwärts strahlen	Licht boven of onder	Éclairage haut ou bas	Emisión superior/ inferior	Luce monoemissione sopra/sotto
	Up and Down	Aufwärts und abwärts strahlend	Licht boven en onder	Éclairage haut et bas	Emisión superior e inferior	Luce biemissione sopra/sotto
	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energietabel	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull' etichettatura energetica
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron vervangbaar door eindgebruiker	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituable por el usuario	Sorgente luminosa sostituibile dall'utente finale
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet vervangbaar	Source lumineuse non remplaçable	Fuente luminosa no sustituable	Sorgente luminosa non sostituibile
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Driver vervangbaar door eindgebruiker	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituable por el usuario	Dispositivo di controllo sostituibile dall'utente finale
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Driver niet vervangbaar	Dispositif de commande non remplaçable	Mecanismo de control no sustituable	Dispositivo di controllo non sostituibile
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron vervangbaar door een erkend vakman	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituable por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Driver vervangbaar door een erkend vakman	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de controls ustituable por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati

contact

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV

Spinnerijstraat 99/21
8500 Kortrijk, Belgium
Phone +32 56 492 800
office@weverducre.com
weverducre.com

SHOWROOMS

AUSTRIA

Dokter-Hermann-Thurner-Straße 3 / Top 17
4060 Leonding
Phone +43 316 3170 8570
office.at@weverducre.com

Gleisdorfer Gasse 15
8010 Graz
Phone +43 316 317 085 91
office.at@weverducre.com

Marxergasse 1B
1030 Vienna
Phone +43 1 526 47 84
office.at@weverducre.com

BELGIUM

Gare Maritime
Picardstraat 7
bus 304
1000 Brussels
Phone +32 56 492 800
office@weverducre.com

FINLAND

Sörnäistenkatu 1
00580 Helsinki
Phone +358 50 348 4366
office.fi@weverducre.com

FRANCE

36, Rue Juliette Récamier
69006 Lyon
Phone +33 4 72811199
office.fr@weverducre.com

10, Rue Pecquay
75004 Paris
Phone +33 1 402 981 01
office.fr@weverducre.com

GERMANY

Europa-Allee 18
60327 Frankfurt am Main
Phone +49 69 21029590
office.de@weverducre.com

Helmholtzstraße 2
10587 Berlin
Phone +49 30 39743290
office.de@weverducre.com

Schanzenstraße 36, Geb. 234B
51063 Cologne
Phone +49 221 130649 60
office.de@weverducre.com

Ruhrstraße 11A / Im Phoenixhof
22761 Hamburg
Phone +49 40 85179283 0
office.de@weverducre.com

Maybachstraße 10b
70469 Stuttgart
Phone +49 711 806075 90
office.de@weverducre.com

HONG KONG

RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
Phone +852 211 069 24
office.hk@weverducre.com
office.cn@weverducre.com

ITALY

Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Phone +39 0421 177 83 88
office.it@weverducre.com

NETHERLANDS

Design Post Amsterdam
Cruquiusweg 111L, 1019 AG Amsterdam
Phone +31 20 229 6001
info.nl@weverducre.com

POLAND

ul. Komitetu Obrony Robotników 70,
02-146 Warsaw
Phone +48 730 330 358
office.pl@weverducre.com

SPAIN

Plaça Duc de Medinaceli 5
08002 Barcelona
Phone +34 93 5112 189
office.es@weverducre.com

SWEDEN

Norr tullsgatan 12N
11327 Stockholm
Phone +46 10 440 71 10
office.se@weverducre.com

SWITZERLAND

Sonnmatthof 3
6023 Rothenburg
Phone +41 41 361 60 60
office.ch@weverducre.com

UK

477b-478 Batemans Row
London, EC2A 3HH
Phone +44 203 174 01 77
info.uk@weverducre.com

REPRESENTATIVE OFFICES

INDIA

1524, Astralis, Supernova, Sector-94
201301, Noida, Uttar Pradesh
Phone +918377006926
office.in@weverducre.com

NORWAY

Drammensveien 130, Innng. B12
0277 Oslo
Phone +47 24 07 61 11
office.no@weverducre.com

UAE

Office No. 704, HDS Business Center
Cluster M, Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

©WEVER & DUCRÉ® BV

1ST EDITION, MARCH 2026

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. Please note: The printed prices reflect the pricing at the time of catalogue publication. For the most up-to-date pricing, please refer to our website. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned wattage, lumen, beam angles, lifetime and SDCM values refer to white luminaires (in terms of finishing, covers or housings) in 3000K. Further values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with 

COVER

GRAPHIC DESIGN

PRINT PRODUCTION

ILLUSTRATION

TEXT

LITHOGRAPHY

PROJECT MANAGEMENT

PRINTING

VISUALIZATIONS

PHOTOGRAPHY

Frederik Vercruysse

Carola Friedrich, Carina Erlach

Carola Friedrich, René Zavadilík

Carina Erlach, Lukas Hochenwarter

Tanja Petschnig


Volker Waldhauser

Carola Friedrich, Melanie Löffler, Victoria Prath

Drukarnia Perfekt S.A., Warsaw, Poland

Animations - Visuals for brands, Nanopixel bv, Outlier Creative, P1.Studio

Adrian Beck (546), Aikon-Producties-bvba (236), Aleksandr Dal Cero (250), Álvaro Valdecantos (724), Amaury Laparra (204, 252), Andrea Badrutt Fotografie (302), Andrei Valeriu Radulescu (242), Anker & Co (36, 234), Annelien Geenen (510), Annelies Degroote (216, 222, 696), Arnold Ory (98), Axis71 (14, 16), Barbara Corsico (554), Bart Gosselin Photography (118, 166, 192, 298, 340, 662), Beeldcollectief Lucas Despriet (21), Benoit Ravier-Bollard (282), Bert Demasure (420), Bob Reijnders (342), Camille Huguenot (74), Caroline Dethier (812), Catherine Roider (394), Charlotte Kap Interieurfotografie (230), Chiela van Meerwijk (126, 324, 570), Chris Snook (80), Christian Brandstätter (784), Christoph Hütter Photography (30), Christoph Platzter (654), Christoph Steinbauer (368, 578, 748, 754, 816), Corinna Unterkofler (828, 862), Cornelia Kindsvater (442, 443), Daniel Stauch (328), Dieter Vyvey (272), Elia Kuhn Photographe (120), Elien Jansen (224), Elodie Dugué Photographe (598), Elodie Winter Photographe (600), Elsa Young (580), Emanuel Waldmann (136), Empower Spaces (656), Erich Sinzinger, 2019 (858), Erik Ćuriš (626, 627), Evgenij Avramenko (610), Fabrizio Carraro (418, 419, 658, 659), Federico Covre – Architectural Photographer (407), Flare Department (78, 130), Florian Zenk (36, 446, 447), French Village (584), Gerald Van Rafelghem (842), Gerard Colomé (92, 194, 195, 416, 814, 834, 844), Gianni Declercq Photography (588), Giovanni Nardi (278, 280), Gonzalo Botet (264), Gregor Titze (636), Hanne Joosen Fotografie (164, 244), Hannes Otte (25, 36, 260, 514, 808), Ilaria Sgambaro from Interni 21.11 (392), In-Between Architects Limited (688), Ingo Rasp Photography (574), Jacek Rokowski (674), Jakob Kotzmuth (794, 795), Jan Kan (714), Jean Pellaprat de VISIBLE (524), Joachim De Rous (102), Joachim Grothus (180, 228), Joachim Grubelnik (828, 862), Johan Méallier (594), Julien Pépy (46), Jurrit van der Waal – The Art of Living magazine (606), Karsten Knocke (734), Kim Donggyu (444), Kris Dekeijser (17, 25, 35, 49, 60, 82, 84, 90, 106, 152, 156, 160, 208, 212, 238, 240, 246, 248, 262, 276, 288, 300, 304, 320, 332, 334, 348, 349, 364, 366, 376, 408, 464, 480, 482, 484, 498, 522, 532, 536, 550, 558, 559, 604, 624, 628, 638 632, 634, 702, 718, 730, 742, 756, 758, 764, 768, 780, 786, 800, 802, 810, 826, 838, 848, 850, 860, 861, 864, 872, 880), Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (618), Kristof Claeys (172), Kurt Kuball (762, 796), Lennart Wiedermuth (25, 538), Lenzer (380), Local Minded (378), Lukas Jahn (782), Lukas Vazan (18), Lumine Fotografie (518), M. Leimgruber (29), Margriet Hoekstra (254, 820), Marta D'Avenia Photography (608), Marta Vidal (96, 410, 576), Martin Grobe (642), Max Feldhoff (542), Maxi Conesa (202), Melvin wong weije (806), Mgr. art. Matej Hakár (560), Michaël Radi (596, 597), Miika Leskinen (572, 682), Miloš Martinović (154), Miriam Raneburger (766), Namsun Lee (218), Niels Nygaard (460), Nikolaus Pfusterschmid (752), nomadic.den (494), Norbert Tukaj (740, 840), nunofoto (804), Open Architectes (876), Oracle – Clément Gerard (676), Paloma Pacheco Turnes (664, 665), Patricia Goijens (496), Paul Ott (516, 564, 565), Peter Baas Photography (108, 256), Peter Margis (388), Petri Immonen (220), Philip Kottlorz Fotografie (292, 296, 372, 640), Pilar Shoots (66, 182, 490), PO Photo (146), Pol Viladoms (646), Pro Urban AG (466), Quy Bui - Wuyhoang Studio (478, 653, 890, 891), Radoje Burzan photography (76), renaatnijs (36), Rupert Asanger (540), Salva López (138), Sandra Mulder (14, 19), Sebastian Reiser (468, 469, 684, 886, 888), Sergio Camplone (544), Søren Kristensen (162), Steenoven (186), Stefano Maniero (692), Stella Kager (9, 13, 26, 30, 35, 38, 644), Stéphanie Mathias (51, 354, 355), Stevie Campbell (672), Stijn Poelstra (614), Stijn Vereeken (132), Studio Blenda (424, 425), Studio Erick Saillet (128), Studio Fo.cus (62), Studio Gataric Fotografie (704), Studio05 (652), Sue Baer (488), Supereal (206), Tijs Vervecken (142), Tom Bremer (322, 346, 612), Tom Lierman photography (352), Trien Byttebier (150, 548), Type Type Hype (37), Uliana Grishina (666), Unique Renovations (650), Victor Chito (86, 832), Victor Sajara Photography (856), Vlad Cioplea (556), Yves Garneau (112), Zvonimir Mihaljek (798)



index by *name*

1-PHASE TRACKS	361
3-PHASE TRACKS	385
BENTO	621
BLAS CEILING SURFACE	767
BLAS WALL SURFACE	827
BLIEK	67
BLIEK PETIT CEILING RECESSED	63
BLIEK PETIT CEILING SURFACE	179
BLINK	839

BOX

BOX CEILING SURFACE	235
BOX CEILING SURFACE EXTERIOR	765
BOX ON STREX	335
BOX WALL SURFACE	607
BOX WALL SURFACE EXTERIOR	815
BOX MINI CEILING SURFACE	231
BOX MINI WALL SURFACE	605

CARD	843
------	-----

CENO

CENO CEILING RECESSED	131
CENO CEILING SURFACE	181
CENO ON STREX	321
CENO WALL SURFACE	585

CENTRAL	617
CENTRAL EXTERIOR	809
CG01	719
CG SQUARE	647
CHART	851
CHART ASYM	853
CITY IP44	173
CLASCO	791

CLEA

CLEA CEILING SURFACE	287
CLEA CEILING SUSPENDED	557
CLEA WALL SURFACE	631

CONE	463
COZY CONE CEILING SUSPENDED	503
COZY CONE ON STREX	345
DARF CEILING SUSPENDED	445
DARF WALL SURFACE	643

DEEP

DEEP	107
DEEP EXTERIOR	745
DEEP IP65 IP44	161
DEEP ADJUST	119
DEEP ADJUST IQ	115
DEEP ADJUST PETIT	113
DEEP ADJUST PETIT IQ	111
DEEP ADJUST PETIT TRIMLESS	113
DEEP ADJUST TRIMLESS	117
DEEP BIJOU	99
DEEP BIJOU EXTERIOR	741
DEEP BIJOU IP65	157
DEEP IQ	105
DEEP PETIT	103
DEEP PETIT EXTERIOR	743
DEEP PETIT IP65	159
DEEP PETIT IQ	101
DEEP POINT	97
DEEP POINT IP44	155
DEEPER	109
DEEPER IP44	163

DINOR	563
-------	-----

DOCUS

DOCUS CEILING SURFACE	241
DOCUS ON STREX	337
DOCUS MINI CEILING SURFACE	239
DOCUS MINI WALL SURFACE	609

DOMINO	693
DOMY ON STREX	327
DOT	649

DRO

DRO CEILING SURFACE	279
DRO CEILING SUSPENDED	465
DRO FLOOR SURFACE	731
DRO ON 1-PHASE TRACK	373
DRO TABLE	717
DRO TABLE FLOOR SURFACE	715
DRO WALL SURFACE	623

ELLO SYSTEM	405
-------------	-----

FIL

FIL CEILING SUSPENDED	441
FIL SPIN CEILING SURFACE	267
FIL SPIN WALL SURFACE	681

FINELLE CEILING SUSPENDED	423
FLYRA CEILING SUSPENDED	427
FLYRA SYSTEM	401

FINLIN

FINLIN CEILING SURFACE	263
FINLIN CEILING SUSPENDED	433
FINLIN FLOOR SURFACE	727
FINLIN WALL SURFACE	673
FINLIN ROUND	679

GATE CARRÉ FLOOR SURFACE	871
GATE ROUND FLOOR SURFACE	869
GEO FLOOR SURFACE	885
GIGANT	461
HAJO IP44	697

HEXO

HEXO CEILING SURFACE	245
HEXO CEILING SUSPENDED	533
HEXO ON 1-PHASE TRACK	377
HEXO ON 3-PHASE TRACK	393
HEXO ON STREX	339
HEXO MINI CEILING SURFACE	243
HEXO MINI CEILING SUSPENDED HV	531
HEXO MINI CEILING SUSPENDED LV	505
HEXO MINI ON 1-PHASE TRACK	375
HEXO MINI ON 3-PHASE TRACK	391
HEXO MINI WALL SURFACE	611

ILANE	409
INTRA	749

J.J.W.

J.J.W. CEILING SURFACE	289
J.J.W. CEILING SUSPENDED	479
J.J.W. WALL SURFACE	633

KIOSK FLOOR SURFACE EXTERIOR	857
KIOSK WALL SURFACE	793
KUJO CEILING SUSPENDED	453
LARRA	671

LECA

LECA CEILING RECESSED	135
LECA CEILING SURFACE	189
LECA ON STREX	325
LECA SNOOZE	569

LEENS	619
LIKO ON 3-PHASE TRACK	387
LINOO CEILING RECESSED	71
LINOO CEILING SURFACE	211
LINUS	881
LITO	575
MAP	845
MAP ASYM	849

MATCH

MATCH CEILING RECESSED	137
MATCH CEILING SURFACE	193
MATCH CEILING SUSPENDED	509
MATCH ON STREX	329
MATCH SUSPENDED ON STREX	347
MATCH FLOOR SURFACE	729
MATCH TABLE	723

MATCH WALL SURFACE	589
MATCH LUSTA	415
MATCH SNEAK	143
MATCH SNOOZE WALL RECESSED	571
MATCH SNOOZE WALL SURFACE	685
MATCH STICK	145
MATCH POINT	61
MATCH POINT IP44	153

MICK

MICK CEILING SURFACE	199
MICK ON STREX	333
MICK WALL SURFACE	691
MICK SNOOZE	687

MILES	669
MILES CARRÉ	667
MILES ROUND	663
MIRBA IP44	705

MIRBI

MIRBI IP44 CEILING RECESSED	171
MIRBI IP44 CEILING SURFACE	297
MIRBI LONG IP44	707

MIRRO

MIRRO CEILING SURFACE	283
MIRRO CEILING SUSPENDED	467
MIRRO FLOOR SURFACE	733
MIRRO TABLE	721
MIRRO WALL SURFACE	625

index by *name*

MIRRO SOFT CEILING SURFACE	285
MIRRO SOFT CEILING SUSPENDED	471
MIRRO SOFT WALL SURFACE	629

NET	421
-----	-----

ODREY

ODREY CEILING SUSPENDED HV	539
ODREY CEILING SUSPENDED LV	517
ODREY ON 1-PHASE TRACK	379
ODREY ON STREX	353
ODREY WALL SURFACE	599

OPLIA CEILING SUSPENDED	521
OPLIA ON STREX	357
OPLIA CHANDELIER	457
ORIS	581
ORIS EXTERIOR	785
PALOS WALL SURFACE EXTERIOR	819
PALOS CARRÉ FLOOR SURFACE EXTERIOR	877
PALOS ROUND FLOOR SURFACE EXTERIOR	873
PAVIO IP65	711
PAVIO EXTERIOR	831

PERLEZ

PERLEZ IP44 CEILING RECESSED	169
PERLEZ IP44 CEILING SURFACE	295
PERLEZ IP44 WALL SURFACE	701
PERLEZ CLIP IP44	703
PERLEZ GRID	275
PERLEZ SPIN	271

PIRRO

PIRRO CEILING RECESSED	77
PIRRO CEILING SURFACE	215
PIRRO ON 1-PHASE TRACK	371
PIRRO ON BASE	223
PIRRO OPAL	221
PIRRO PETIT CEILING RECESSED	75
PIRRO PETIT CEILING SURFACE	213

PILLO CEILING SURFACE	201
PILLO ON 1-PHASE TRACK	363
PLANO CEILING RECESSED	85
PLANO IP44 CEILING RECESSED	151
PLANO PETIT CEILING RECESSED	83
PLANO PETIT CEILING SURFACE	227
POLA	889
QUBBY CEILING SUSPENDED	459
QUBBY SYSTEM	397
QITO CEILING RECESSED	57
QITO CEILING SURFACE	177

RAY

RAY CEILING SURFACE	251
RAY CEILING SURFACE EXTERIOR	759
RAY CEILING SUSPENDED	537
RAY ON 1-PHASE TRACK	377
RAY ON 3-PHASE TRACK	393
RAY ON STREX	341
RAY WALL SURFACE	615
RAY WALL SURFACE EXTERIOR	805
RAY MINI CEILING SURFACE	247
RAY MINI CEILING SUSPENDED HV	535
RAY MINI CEILING SUSPENDED LV	507
RAY MINI ON 1-PHASE TRACK	375

RAY MINI ON 3-PHASE TRACK	391
RAY MINI WALL SURFACE	613

REED	887
------	-----

RETO

RETO WALL RECESSED	573
RETO WALL RECESSED EXTERIOR	781
RETO WALL SURFACE EXTERIOR	835
RETO ROUND	833

RIBELLE FLOOR SURFACE	867
RIBELLE IP65 WALL SURFACE	709
RIBELLE WALL SURFACE EXTERIOR	825
RINI SNEAK IP44	167
ROB IP44	301
ROB EXTERIOR	769
ROBY IP44	303
RONY ADJUST	129
RONY ADJUST PETIT	127
RONY PETIT	125
RONY POINT	123

ROOMOR

ROOMOR CEILING SUSPENDED	495
ROOMOR FLOOR SURFACE	735
ROOMOR TABLE	725
ROOMOR WALL SURFACE	639
ROOMOR OFFICE CEILING SURFACE	293
ROOMOR OFFICE CABLE SUSPENDED	499
ROOMOR OFFICE ON 3-PHASE TRACK	395

ROSS IP54	307
ROSS EXTERIOR	771
RUVI CEILING RECESSED	147
RUVI ON 1-PHASE TRACK	383

SARA

SARA ON BASE	203
SARA ON 1-PHASE TRACK	365
SARA SNOOZE	689

SCAVA	695
SHEDDA	449
SHEDDA FRACTAL	451
SHIEK	561
SIRRO	229
SNEAK	93
SNEAK TRIMLESS	91
SOLID	257
SOLID BIJOU	253
SOLID PETIT	255
SOLLI CEILING SUSPENDED	523
SOLLI ON STREX	359
SOLLI COCOON	525
SPIRRA SOFT	475
SQUBE ON BASE	205
SQUBE ON 1-PHASE TRACK	369
SQUBE ON 3-PHASE TRACK	389
STIPO	863
STUDO	437
STRANGE TRIMLESS	89
STRANGE PETIT TRIMLESS	87
STREX DOT MODULE	343
STREX OPAL MODULE	343
STREX SYSTEM 48V	313
STRIPE	579
STRIPE SLIM	577
SWAM FLOOR SURFACE	859
SWAM WALL SURFACE	821

TAIO

TAIO CEILING RECESSED EXTERIOR	747
TAIO CEILING SURFACE EXTERIOR	757
TAIO IP65 CEILING RECESSED	165
TAIO IP65 CEILING SURFACE	299
TAIO WALL SURFACE EXTERIOR	803

TAPE	817
TAPIS	651
TAPIS SOFT	657
TOWNA IP44	305

TRADORA

TRADORA CEILING SURFACE	775
TRADORA CEILING SUSPENDED	777
TRADORA WALL SURFACE	823

TRACE

TRACE CEILING SURFACE	261
TRACE CEILING SUSPENDED HV	547
TRACE CEILING SUSPENDED LV	511
TRACE ON STREX	351
TRACE WALL SURFACE	593
TRACE CHANDELIER	417
TRACE GRID	273
TRACE MINI ON STREX	331
TRACE MINI WALL SURFACE	591
TRACE SLIM	595
TRACE SPIN	269

TRAIN CEILING SURFACE	761
TRAIN WALL SURFACE	807
TRAM CEILING SURFACE	753
TRAM WALL SURFACE	797
TUBE CEILING SURFACE	755
TUBE WALL SURFACE	799
TUBE CARRÉ CEILING SURFACE	763
TUBE CARRÉ WALL SURFACE	811
VENN CEILING SURFACE	277
VENN WALL SURFACE	683
WAVE SOFT	477
WETRO	549
WIRO CEILING SURFACE	291
WIRO CEILING SUSPENDED	489
WIRO CONE	489
WIRO DIAMOND	493
X-BEAM FLOOR PROJECTOR	865
X-BEAM WALL SURFACE	829

COLOURS AND MATERIALS

For specific information on colours and finishes please refer to weverducre.com/materials




Depending on the product and application, the materialization may differ: For more informations on materials, finishes, structures, RAL and NCS colour codes, please check our product page on the website. RAL and NCS colour codes are always approximate and can be checked by the customer based on samples.

Outdoor

Indoor


METAL

	W	White
	D	Grey
	A	Anthracite Grey
	Q	Bronze
	G	Gold
	B	Black
	K	Black and Gold

	CL	Classic Alu
	CQ	Classic Bronze
	AB	Antique Brass

	I	Inox 304 Stainless steel electro polished
---	----------	---


RECYCLED PET FELT

	WF	White
	MF	Marble Grey
	LF	Limestone
	OF	Oxide Red
	IF	Indigo Blue
	AF	Anthracite
	F	Grey



ALUMINIUM COMPOSITE MATERIAL

	GB	Black and Light Gold
	NB	Black and Black Chrome
	LB	Black and Glossy Aluminium

MARBLE

	MB	Black
	MW	White


GLASS HANDBLOWN

	TS	Smoked Striped
	TW	Taupe White
	DW	Dark Taupe White
	TD	Smoked Diamond
	YD	Yellow Diamond
	GD	Green Diamond
	BD	Blue Diamond
	FD	Frosted Diamond Opal
	P	Copper Plated
	B	Smoked
	W	White Opal

HAJO GLASS

	C	Clear
	W	Sandblasted
	A	Amber
	B	Smoked


METAL

	E	White and Black
	J	White and Gold
	H	Champagne and Black
	K	Black and Gold
	CH	Black and Champagne
	Z	Black and Copper
	GW	Cement Grey and White
	RR	Coral Red and White

OTHERS

	W	White LLDPE
---	----------	---------------


3D PRINTED MATERIAL (IQ)

	RP	Recycled PET
	W	White ASA
	B	Black ASA
	SG	Silk grey ASA



METAL

	LS	Live Simple
	SG	Silk Grey
	FJ	Feel Jade
	CC	Come Closer
	ME	Mother Earth
	YE	Yellow CG01
	RE	Red CG01
	AU	Aubergine CG01
	BE	Blue CG01
	B	Black CG01

PLASTER

	GW	Give Warmth
	ST	Stay Together
	FJ	Feel Jade
	RA	Raw material for custom paint

METAL

	W	White
	L	Aluminium
	G	Gold
	M	Champagne
	Q	Bronze
	P	Copper
	V	Corton steel look
	GM	Gun metal
	B	Black
	A	Anodised Aluminium
	T	Tumbled Aluminium

LINE BRUSHED FINISH FOR METAL COLOURS

	Line brushed
---	--------------

